B. M. 157.08 "+" cut N.W. cor. conc. base Meadowlark Theatre Sign So. Side Marry Approx. 100 ft. W. of Terrace Drive.

B. M. 157.07 "□" cut Top W. cb Menlo Dr. @ N. L. Terrace Dr.

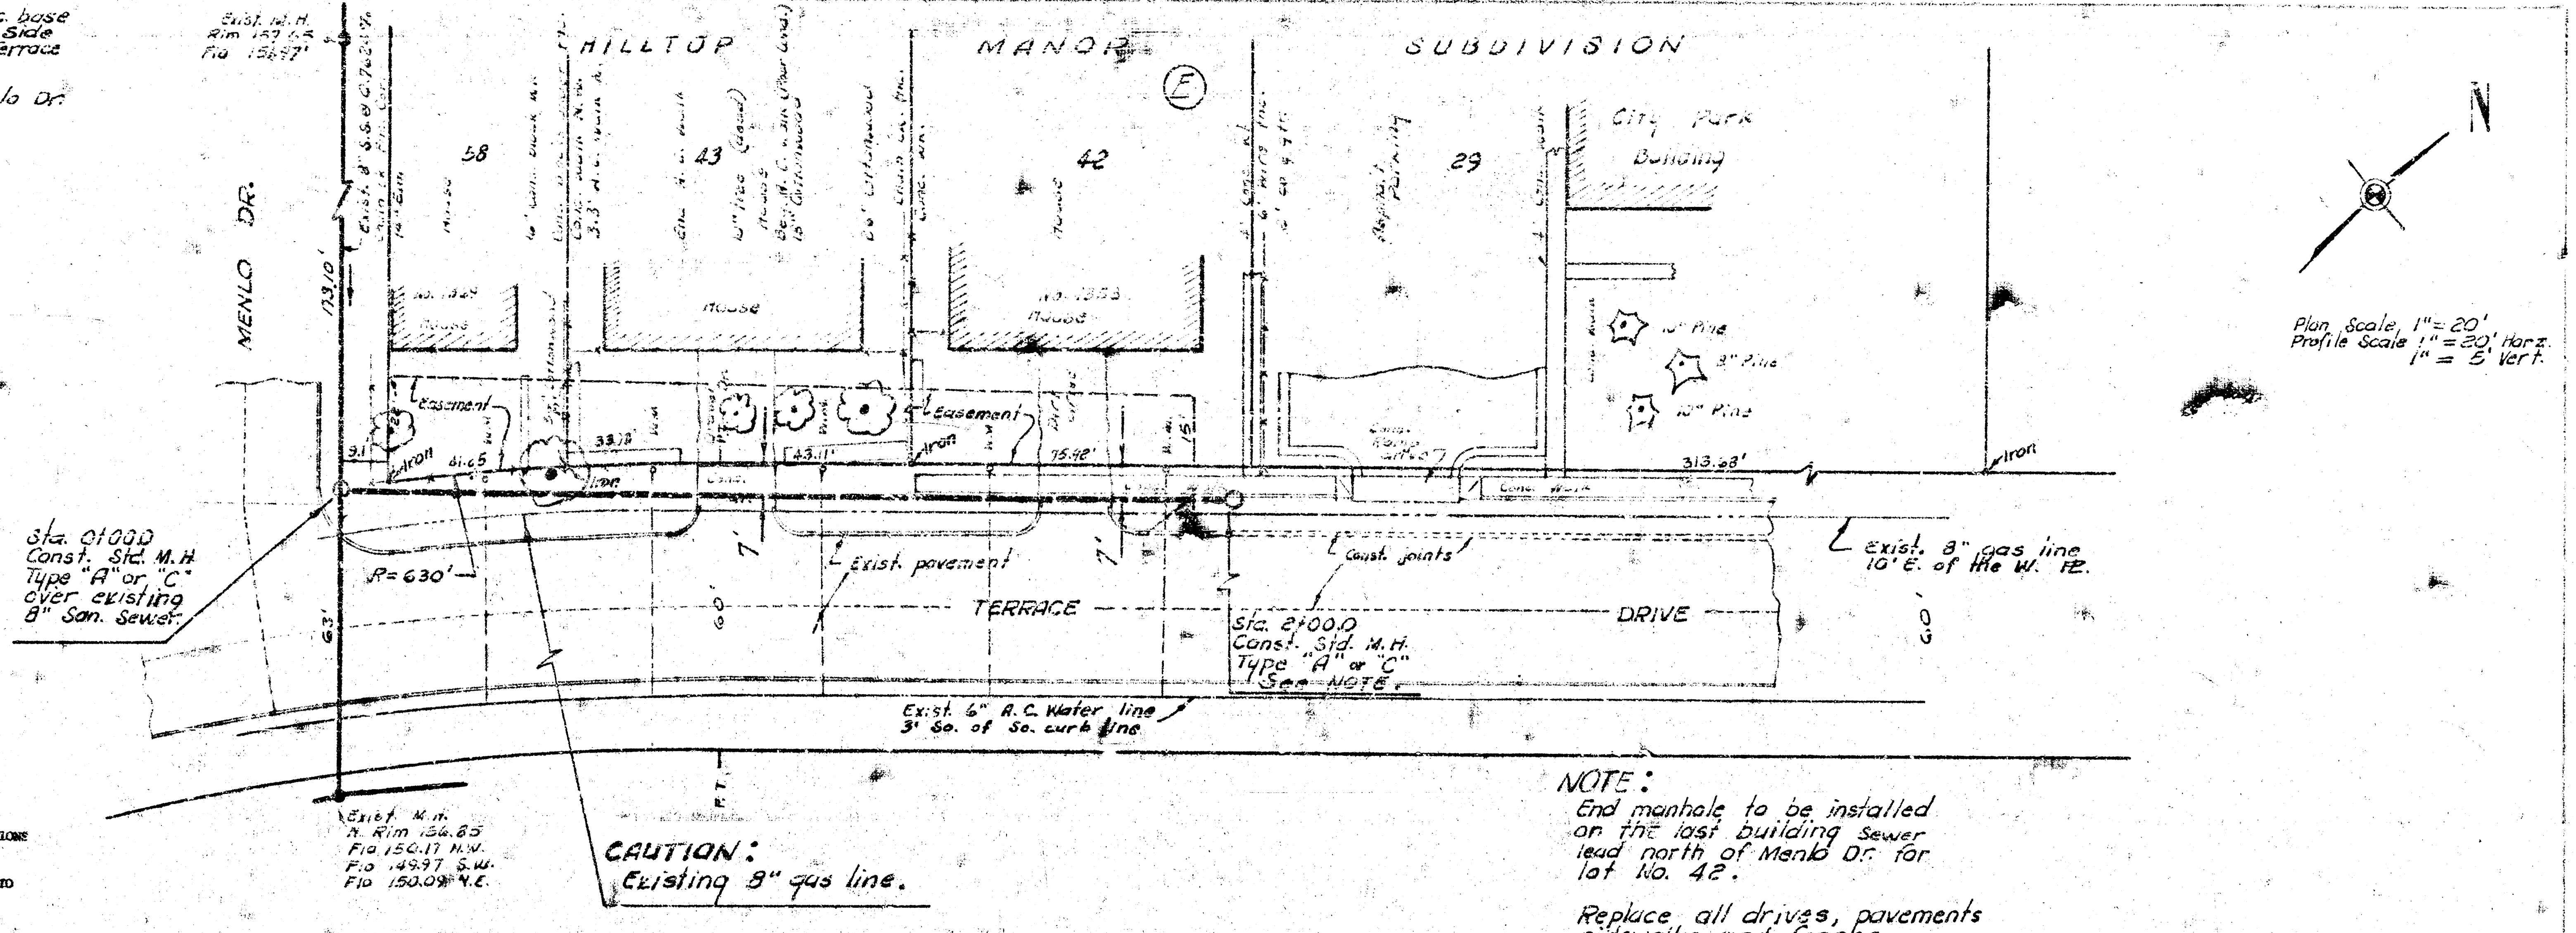

HILLTOP MANOR SUBDIVISION
MENLO DR.
Exist. M.H. Rim 157.65 Flo 156.97'
Exist. 8" S.S. @ 0.76%
58
43
42
29
E
City Park Building
House
Asphalt Parking
133.10'
℄ Easement
Iron
9.1'
61.65
33.18'
43.11'
75.42'
313.68'
R=630'
7'
60'
63'
℄ Exist. pavement
TERRACE
DRIVE
℄ Const. joints
10" Pine
8" Pine
10" Pine
Conc. Walk
Sta. 0+00.0 Const. Std. M.H. Type "A" or "C" over existing 8" San. Sewer
Sta. 2+00.0 Const. Std. M.H. Type "A" or "C" See NOTE
Exist. 6" A.C. Water line 3' So. of So. curb line
℄ exist. 8" gas line 10' E. of the W. P.L.
Exist. M.H. Rim 156.85 Flo 150.17 N.W. Flo 149.97 S.W. Flo 150.09 N.E.
CAUTION: Existing 8" gas line.
N
Plan Scale 1" = 20'
Profile Scale 1" = 20' Horz. 1" = 5' Vert.

NOTE: THE PRICE BID FOR HOUSE SERVICE CONNECTIONS SHALL INCLUDE ALL COSTS FOR CONNECTING SERVICE LINES FROM LOTS 42, 43, AND 58 TO NEW SEWER. CONTRACTOR WILL BE REQUIRED TO OBTAIN PERMITS TO CONNECT SERVICE LINES TO NEW SEWER.

NOTE:
End manhole to be installed on the last building sewer lead north of Menlo Dr. for lot No. 42.

Replace all drives, pavements sidewalks and fences.

Intercept all house sewer lead.

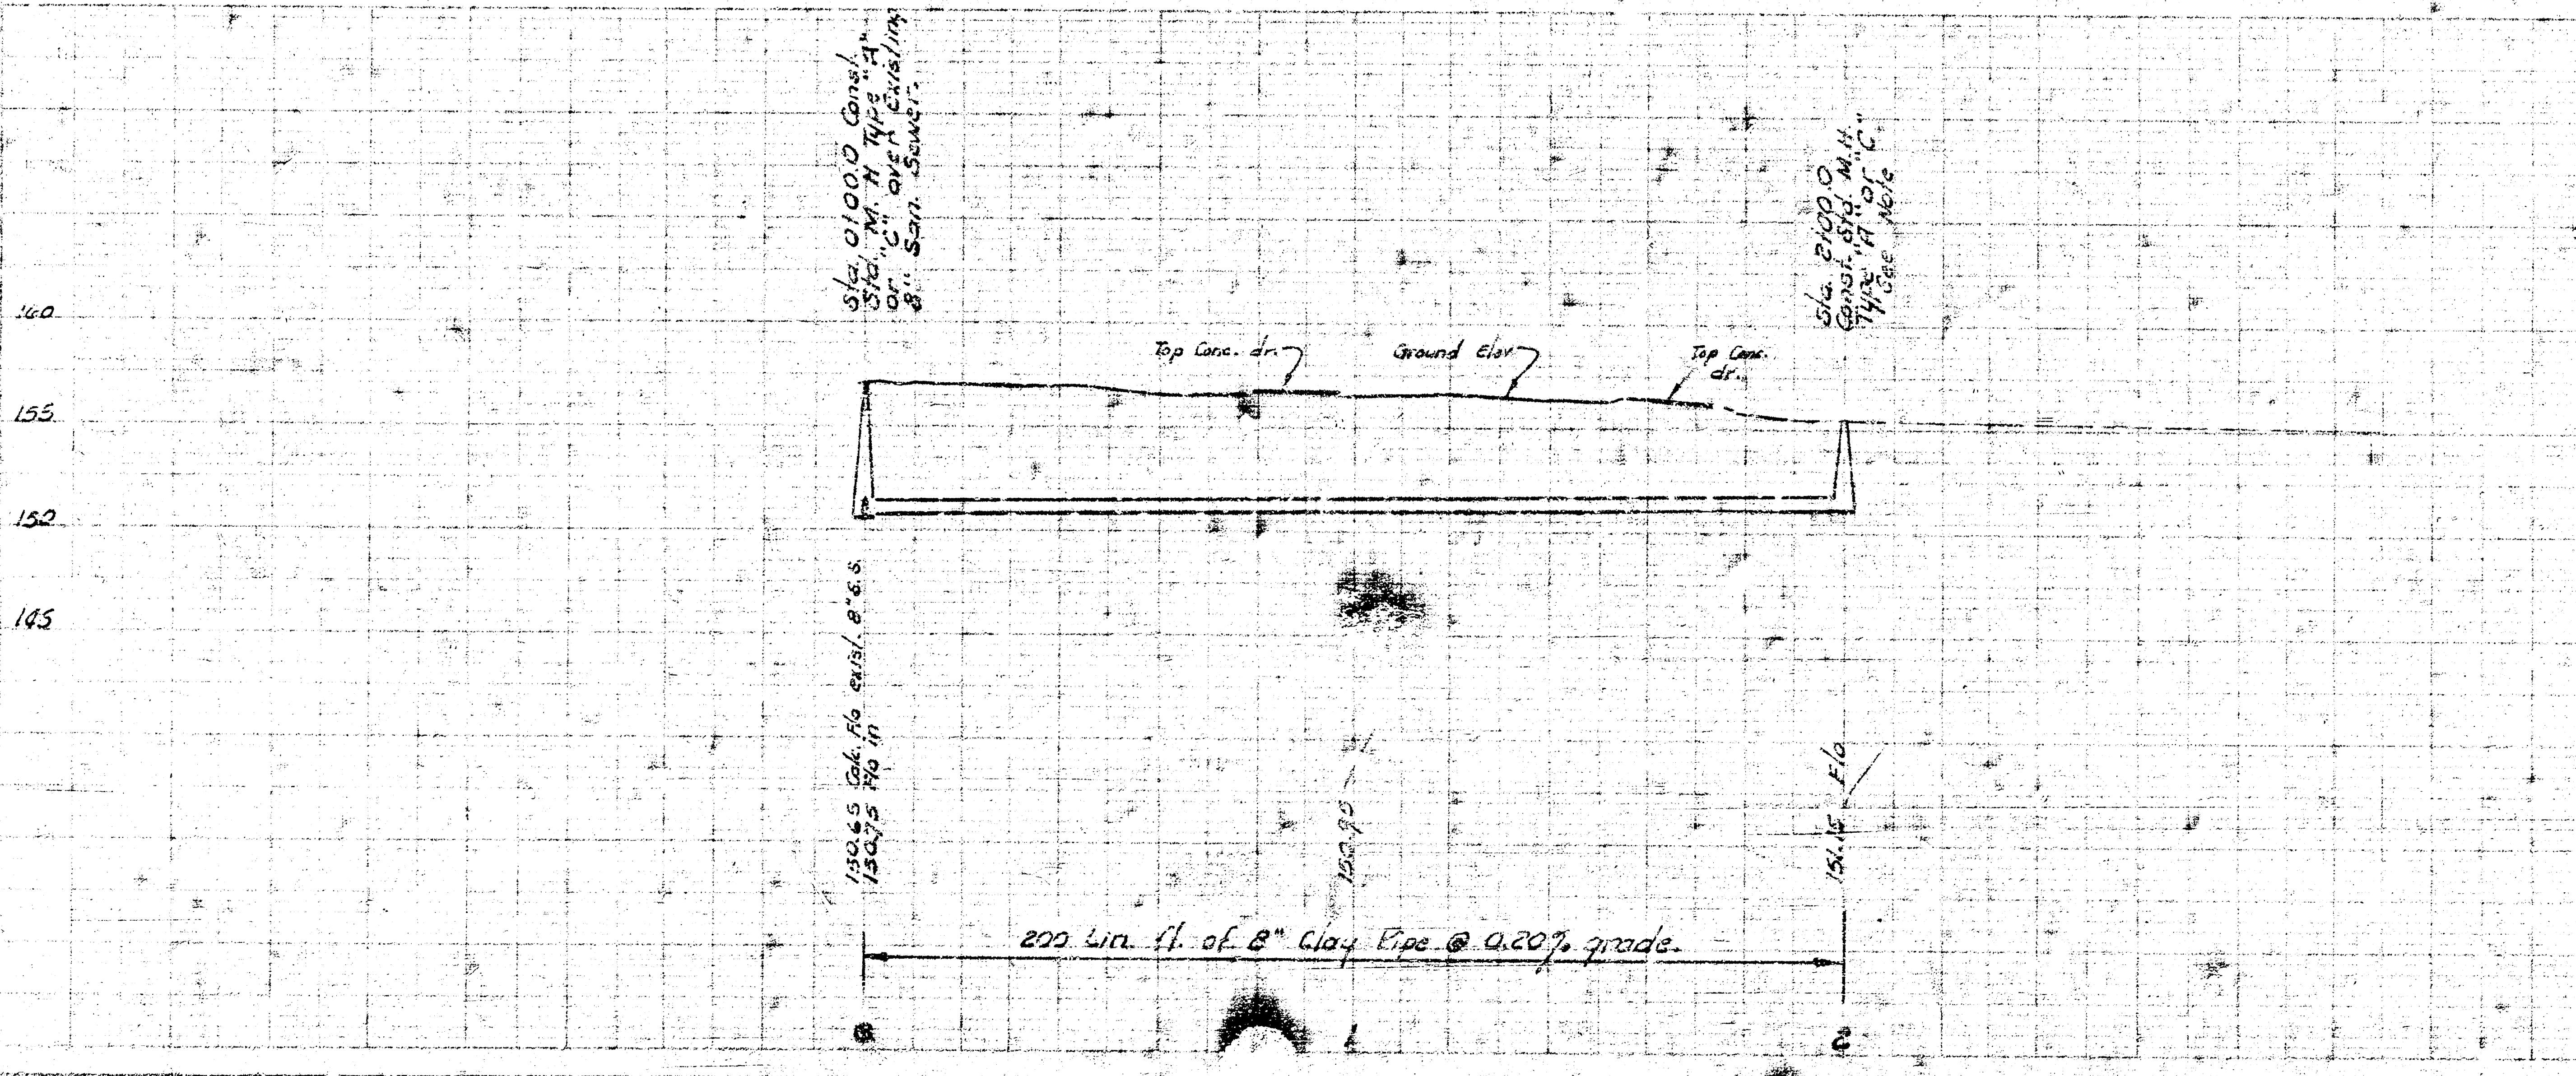

Sta. 0+00.0 Const. Std. M.H. Type "A" or "C" over existing 8" San. Sewer
Sta. 2+00.0 Const. Std. M.H. Type "A" or "C" See Note
Top Conc. dr.
Ground Elev.
Top Conc. dr.
160
155
150
145
150.65 Calc. Flo exist. 8" S.S.
150.75 Flo in
150.95
151.15 Flo
200 Lin. ft. of 8" Clay Pipe @ 0.20% grade.
0
1
2

ALTER, REPAIR, RECONSTRUCT OR
CONSTRUCT A SEWER TO
SUPPLEMENT LINE 10 HILLTOP MANOR SEWER
Along Terrace Dr. from Menlo Dr. to 200 ft. north of Menlo Dr.
CITY OF WICHITA, KANSAS
R. W. LINN — CITY ENGINEER
NOV. 1974 PROJECT NO. DBKL 574095