LEGEND:
1 80x48 OA LOUVER WITH AUTOMATIC DAMPER. INTERLOCK WITH EF-1. LOUVER SHALL BE GREENHECK ESD 435. MOUNT BOTTOM AT 40" AFF.
2 80x48 EA LOUVER. LOUVER SHALL BE GREENHECK ESD 435. MOUNT BOTTOM AT 24'-0" AFF.
3 PROVIDE SCREEN OVER INTAKE.
4 RUBBER IN SHEAR SUSPENSION VIBRATION ISOLATORS.
5 PRIME AND PAINT LOUVER TO MATCH BUILDING. COLOR SELECTED BY ARCHITECT.
6 HOSE REEL ON WALL. PROVIDE HANNAY 9922-30-31-A-HS HIGH FLOW HOSE REEL WITH 75' HOSE LENGTH AND 1 1/4" INLET/OUTLET.

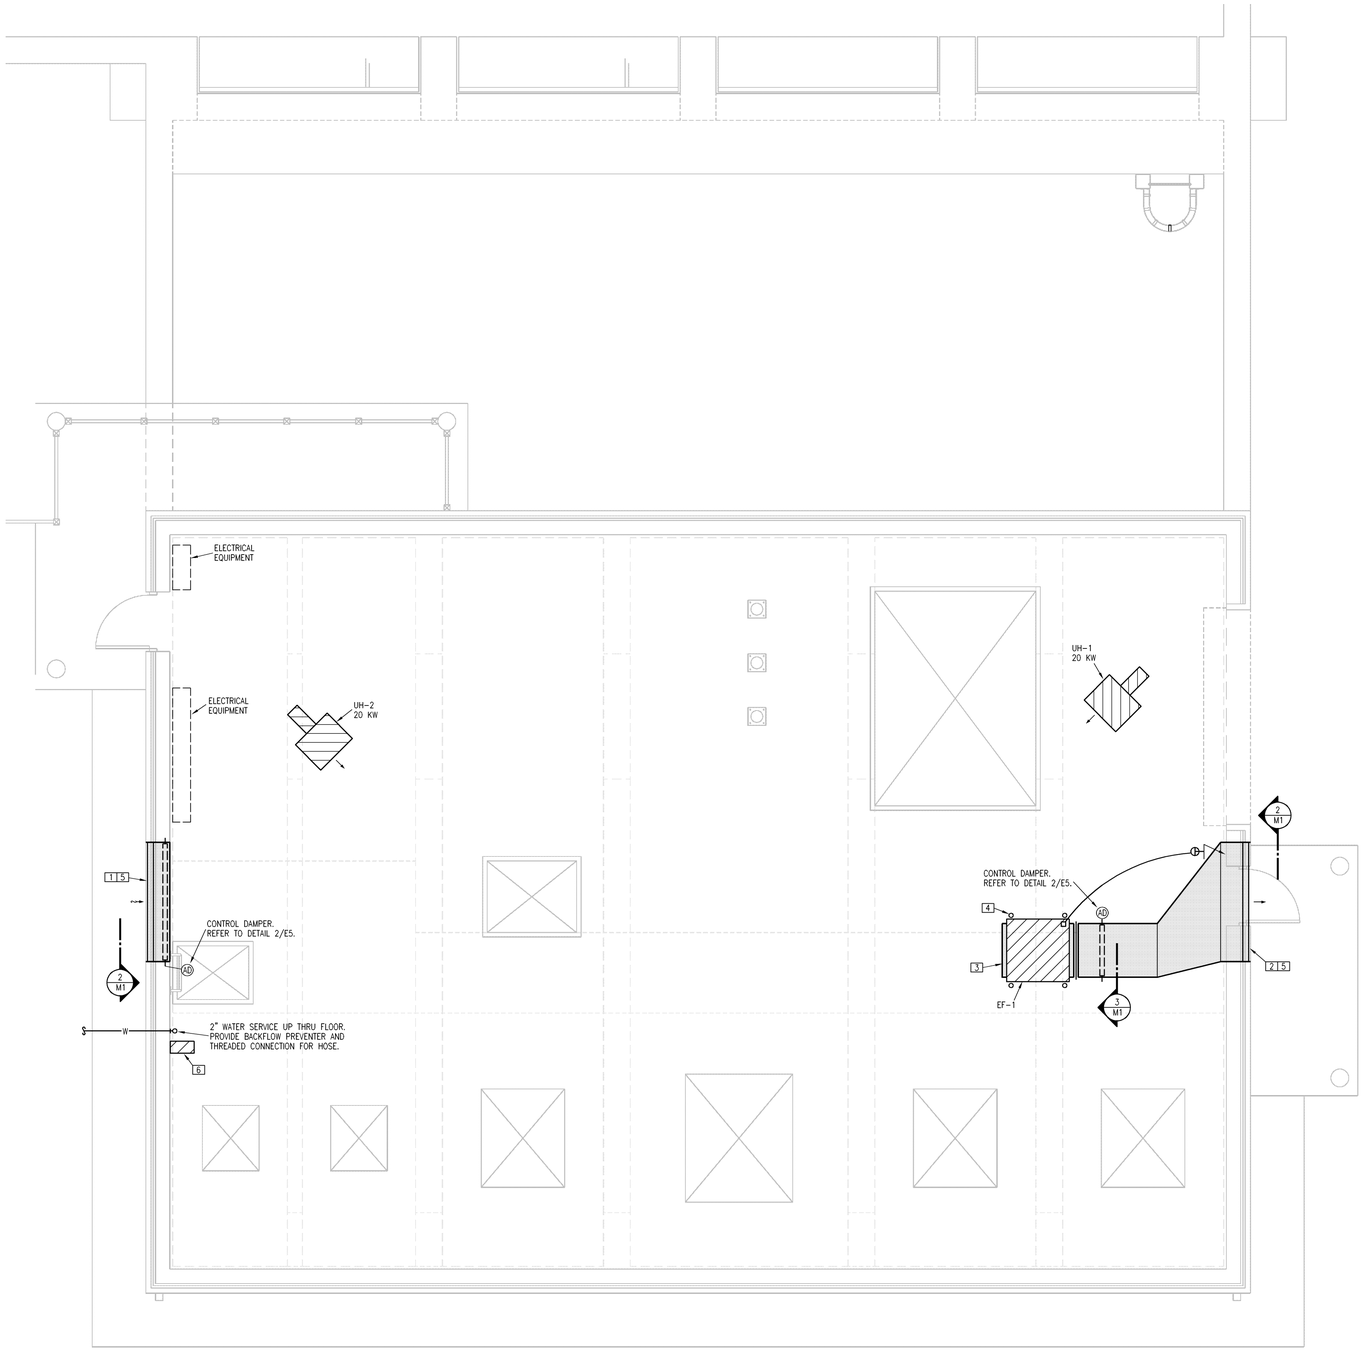

1 PUMP STATION FLOOR PLAN
1/4"=1'-0" MECHANICAL

NORTH

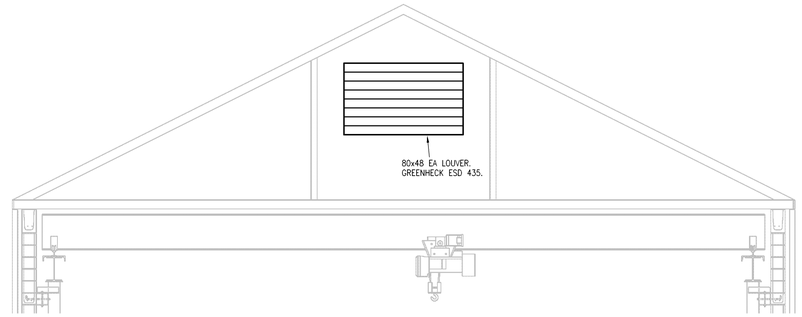

2 ELEVATION
1/4"=1'-0"

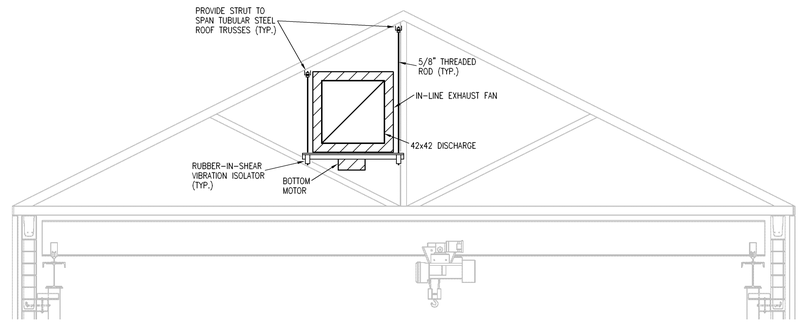

3 SECTION
1/4"=1'-0"

LS&A Latimer Sommers & Associates, P.A.
CONSULTING ENGINEERS
3639 SW Summerfield Drive, Suite A
Topeka, Kansas 66614-3974
Telephone: (785) 233-3232
FAX: (785) 233-0547
Email: lsapa@lsapa.com

CITY OF WICHITA, KANSAS

PUMP STATION NO. 11

MECHANICAL

PUMP STATION FLOOR PLAN -MECHANICAL

CFS Cook, Flatt & Strobel ENGINEERS, P.A.

DESIGNED	AKK	SCALE	As Shown
DETAILED	CAD	DATE	3/11/10
CHECKED	AKK	SHEET	M1 OF 2

M1.dwg 48 02/01/10 MAT