


STATE	PROJECT NO.	YEAR	SHEET NO.	TOTAL SHEETS
KANSAS	472 84614	.	112	534

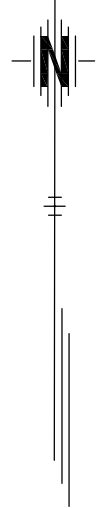


Sta. 12+51.64 Line FS3=
Sta. 1654+29 50.15' Lt.
@ South Frontage Road
Const. Area Inlet (6'x6')
Install 48" x 143.68' RCP (NW)
with 48" End Section
@ Sta. 1653+65.14, 177.02 Lt.

Sta. 0+86.72 Line FS4b=
Sta. 1656+24 55.71' Lt.
@ South Frontage Road
Const. Curb Inlet, Type 12

Sta. 0+61.98 Line FS4a=
Sta. 1657+52.86 30.67' Lt.
@ South Frontage Road
Const. Curb Inlet, Type 12

Sta. 10+48.52 Line FS4=
Sta. 1662+47.04 27.00' Rt.
@ South Frontage Road
Const. Curb Inlet, Type 12
Install 18" x 71.34' RCP (W)

Sta. 10+58.61 Line FS5=
Sta. 1664+78.64 27.00' Rt.
@ South Frontage Road
Const. Curb Inlet, Type 12
Install 24" x 150.36' RCP (E)

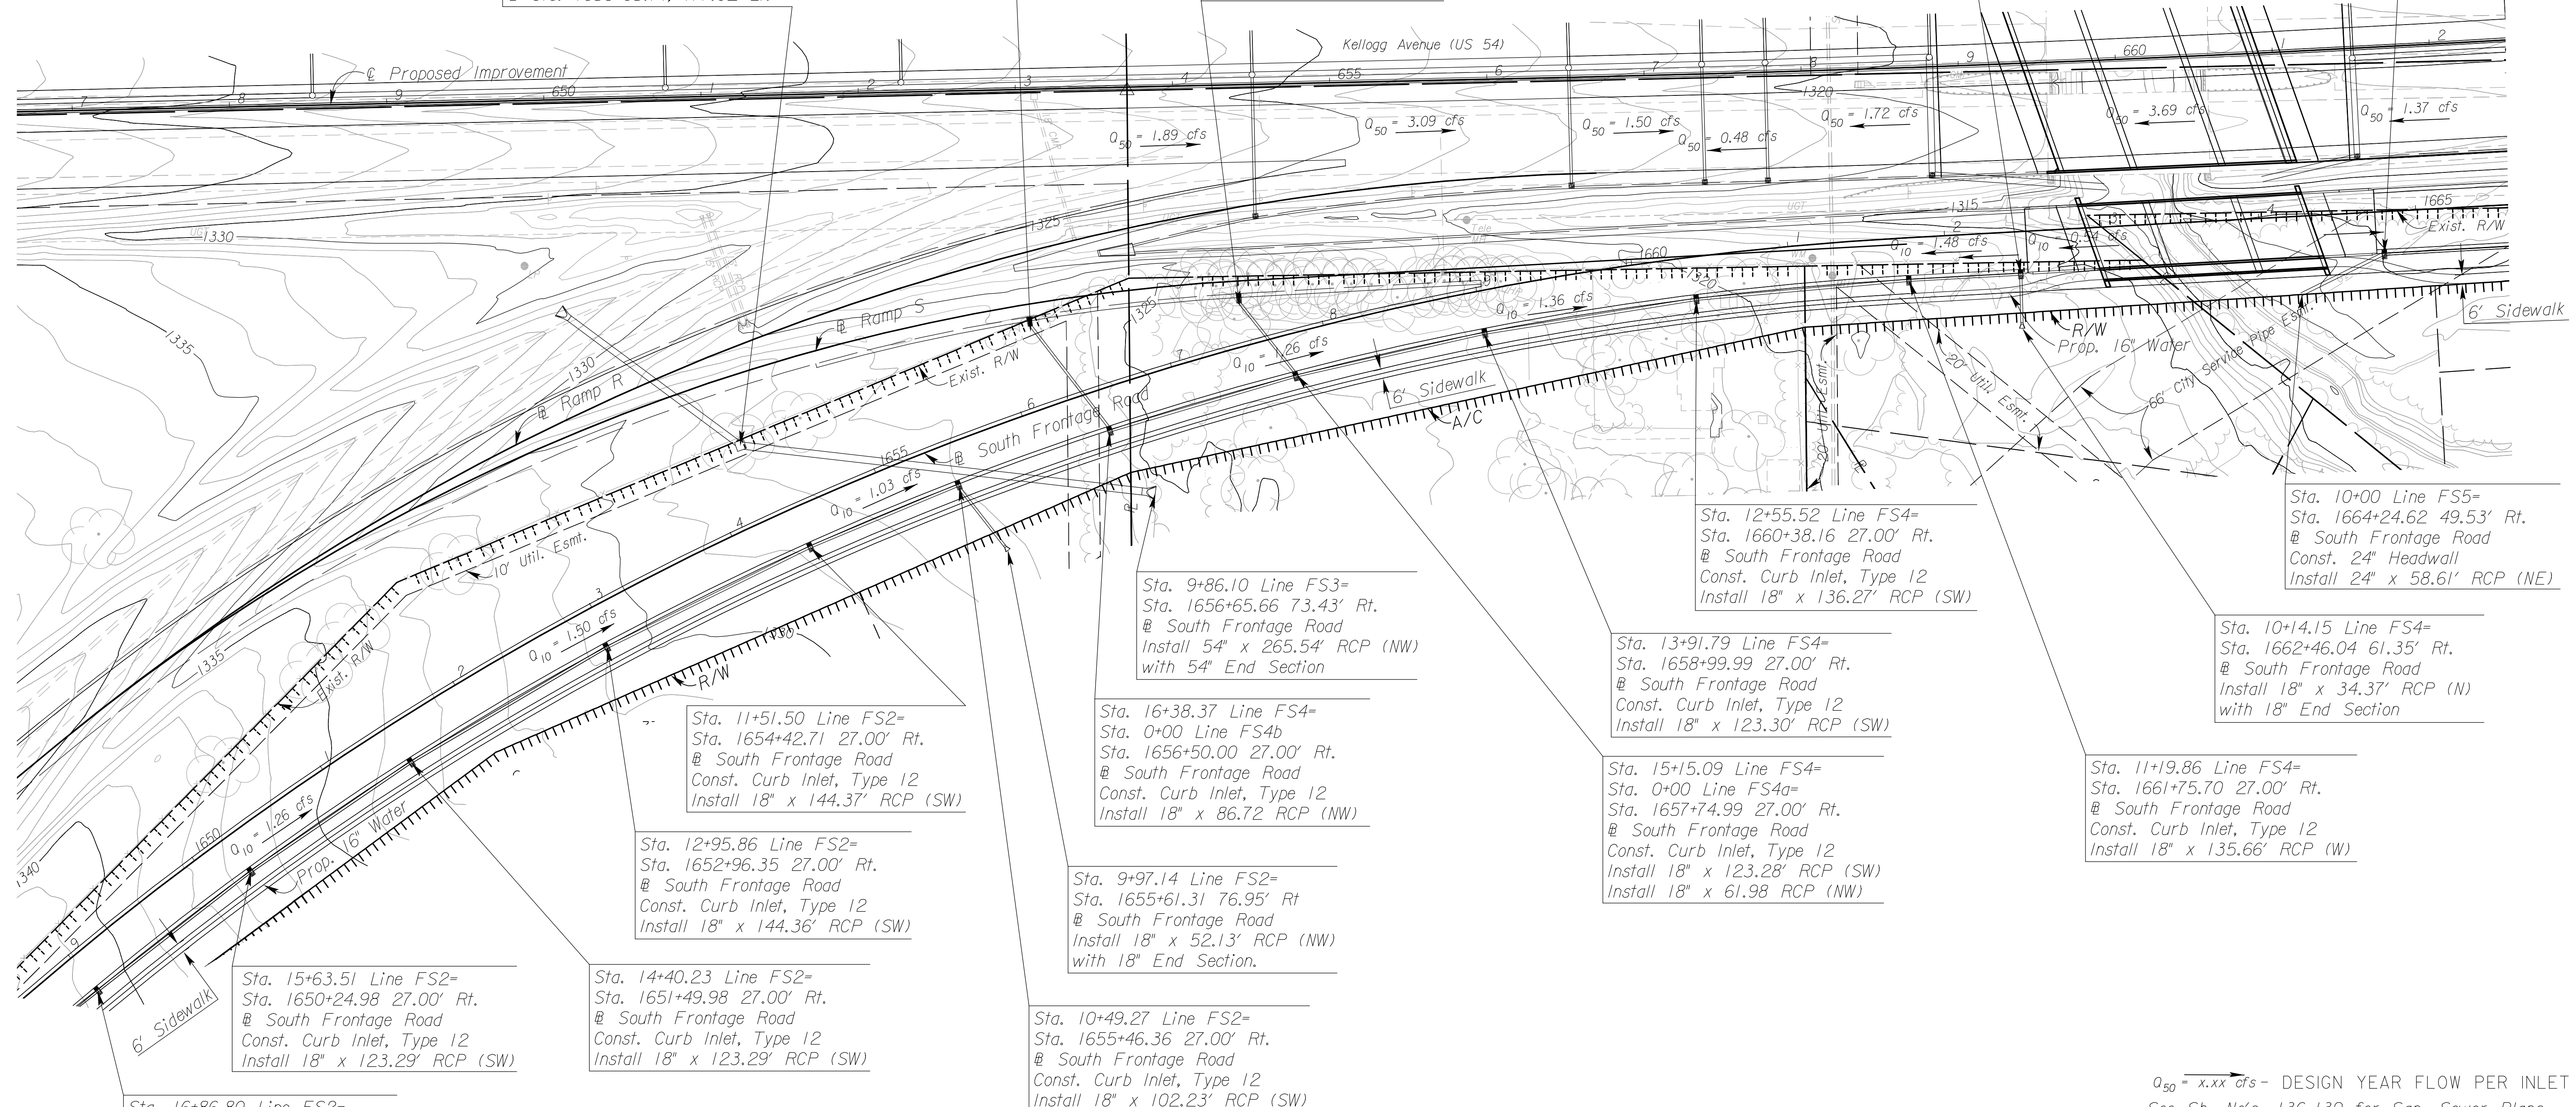

Sta. 11+51.50 Line FS2=
Sta. 1654+42.71 27.00' Rt.
@ South Frontage Road
Const. Curb Inlet, Type 12
Install 18" x 144.37' RCP (SW)

Sta. 9+86.10 Line FS3=
Sta. 1656+65.66 73.43' Rt.
@ South Frontage Road
Install 54" x 265.54' RCP (NW)
with 54" End Section

Sta. 16+38.37 Line FS4=
Sta. 0+00 Line FS4b
Sta. 1656+50.00 27.00' Rt.
@ South Frontage Road
Const. Curb Inlet, Type 12
Install 18" x 86.72 RCP (NW)

Sta. 12+55.52 Line FS4=
Sta. 1660+38.16 27.00' Rt.
@ South Frontage Road
Const. Curb Inlet, Type 12
Install 18" x 136.27' RCP (SW)

Sta. 10+00 Line FS5=
Sta. 1664+24.62 49.53' Rt.
@ South Frontage Road
Const. 24" Headwall
Install 24" x 58.61' RCP (NE)

Sta. 10+14.15 Line FS4=
Sta. 1662+46.04 61.35' Rt.
@ South Frontage Road
Install 18" x 34.37' RCP (N)
with 18" End Section

Sta. 11+19.86 Line FS4=
Sta. 1661+75.70 27.00' Rt.
@ South Frontage Road
Const. Curb Inlet, Type 12
Install 18" x 135.66' RCP (W)

Sta. 15+63.51 Line FS2=
Sta. 1650+24.98 27.00' Rt.
@ South Frontage Road
Const. Curb Inlet, Type 12
Install 18" x 123.29' RCP (SW)

Sta. 14+40.23 Line FS2=
Sta. 1651+49.98 27.00' Rt.
@ South Frontage Road
Const. Curb Inlet, Type 12
Install 18" x 123.29' RCP (SW)

Sta. 10+49.27 Line FS2=
Sta. 1655+46.36 27.00' Rt.
@ South Frontage Road
Const. Curb Inlet, Type 12
Install 18" x 102.23' RCP (SW)

Sta. 16+86.80 Line FS2=
Sta. 1648+99.99 27.00' Rt.
@ South Frontage Road
Const. Curb Inlet, Type 12
Install 18" x 153.12' RCP (SW)

$Q_{50} = x.xx$ cfs - DESIGN YEAR FLOW PER INLET
See Sh. No's. 136-139 for San. Sewer Plans.
See Sh. No's. 140-162 for Water Plans.

UTILITIES

Gas2	Southern Star Pipeline
Power	Westar
Storm Water Sewer	Wichita Water & Sewer
Telephone	AT&T
Water	Wichita Water & Sewer

CITY OF WICHITA
SOUTH FRONTAGE ROAD
STORM WATER SEWER PLAN
STA. 1649+00 TO STA. 1665+00

2:42 PM
 2/18/2011
 J:\CIVIL\07432\DWG\SWS\K2ML PLAN\K2FSSWPLO3.DWG
 SURV. - PLOT CADD DES. - DR. - TR. - CKD. - APP.