


Lakefront CY Excavation (unadjusted)				Lakefront CY Compacted Fill (unadjusted)				Lakefront CY Loose Fill (unadjusted)			
Station	Area	Volume	Total	Station	Area	Volume	Total	Station	Area	Volume	Total
0+45.44	40.74	0.00	0.00	0+45.44	0.00	0.00	0.00	0+45.44	13.66	0.00	0.00
0+50	30.15	5.97	5.97	0+50	0.00	0.00	0.00	0+50	19.02	2.93	2.93
1+00	12.84	39.56	45.53	1+00	0.00	0.00	0.00	1+00	38.42	55.43	58.36
1+50	8.93	20.06	65.59	1+50	0.00	0.00	0.00	1+50	42.84	76.11	134.47
2+00	18.38	25.29	90.88	2+00	0.00	0.00	0.00	2+00	32.43	69.69	204.16
2+50	34.08	48.58	139.46	2+50	0.00	0.00	0.00	2+50	17.48	46.21	250.37
3+00	23.28	53.12	192.58	3+00	0.00	0.00	0.00	3+00	27.45	41.61	291.98
3+50	9.17	30.05	222.63	3+50	0.00	0.00	0.00	3+50	42.77	65.02	356.99
4+00	4.82	12.95	235.59	4+00	0.67	0.62	0.62	4+00	48.35	84.37	441.36
4+50	7.89	11.77	247.35	4+50	0.00	0.62	1.23	4+50	44.34	85.82	527.18
4+75	13.45	9.68	257.04	4+75	0.00	0.00	1.23	4+75	38.48	40.04	567.23
5+00	19.13	14.88	271.92	5+00	0.00	0.00	1.23	5+00	18.03	26.53	593.76
5+25	29.20	22.15	294.07	5+25	0.00	0.00	1.23	5+25	10.48	11.78	605.54
5+41.76	31.90	18.86	312.93	5+41.76	0.00	0.00	1.23	5+41.76	10.56	5.41	610.94
5+47.76	33.71	7.29	320.22	5+47.76	0.00	0.00	1.23	5+47.76	11.44	2.00	612.94
5+50	31.80	2.72	322.94	5+50	0.00	0.00	1.23	5+50	11.89	0.80	613.74
5+53.76	28.28	4.19	327.14	5+53.76	0.00	0.00	1.23	5+53.76	12.84	1.43	615.18
5+75	22.38	19.82	346.96	5+75	0.00	0.00	1.23	5+75	17.37	10.51	625.68
6+00	16.29	17.52	364.48	6+00	0.00	0.00	1.23	6+00	43.38	30.09	655.77
6+16.35	17.90	10.10	374.58	6+16.35	0.00	0.00	1.23	6+16.35	40.28	28.36	684.14
6+50	42.20	37.45	412.04	6+50	0.00	0.00	1.23	6+50	6.02	28.85	712.99
6+59.44	48.57	15.87	427.91	6+59.44	0.00	0.00	1.23	6+59.44	2.34	1.46	714.45

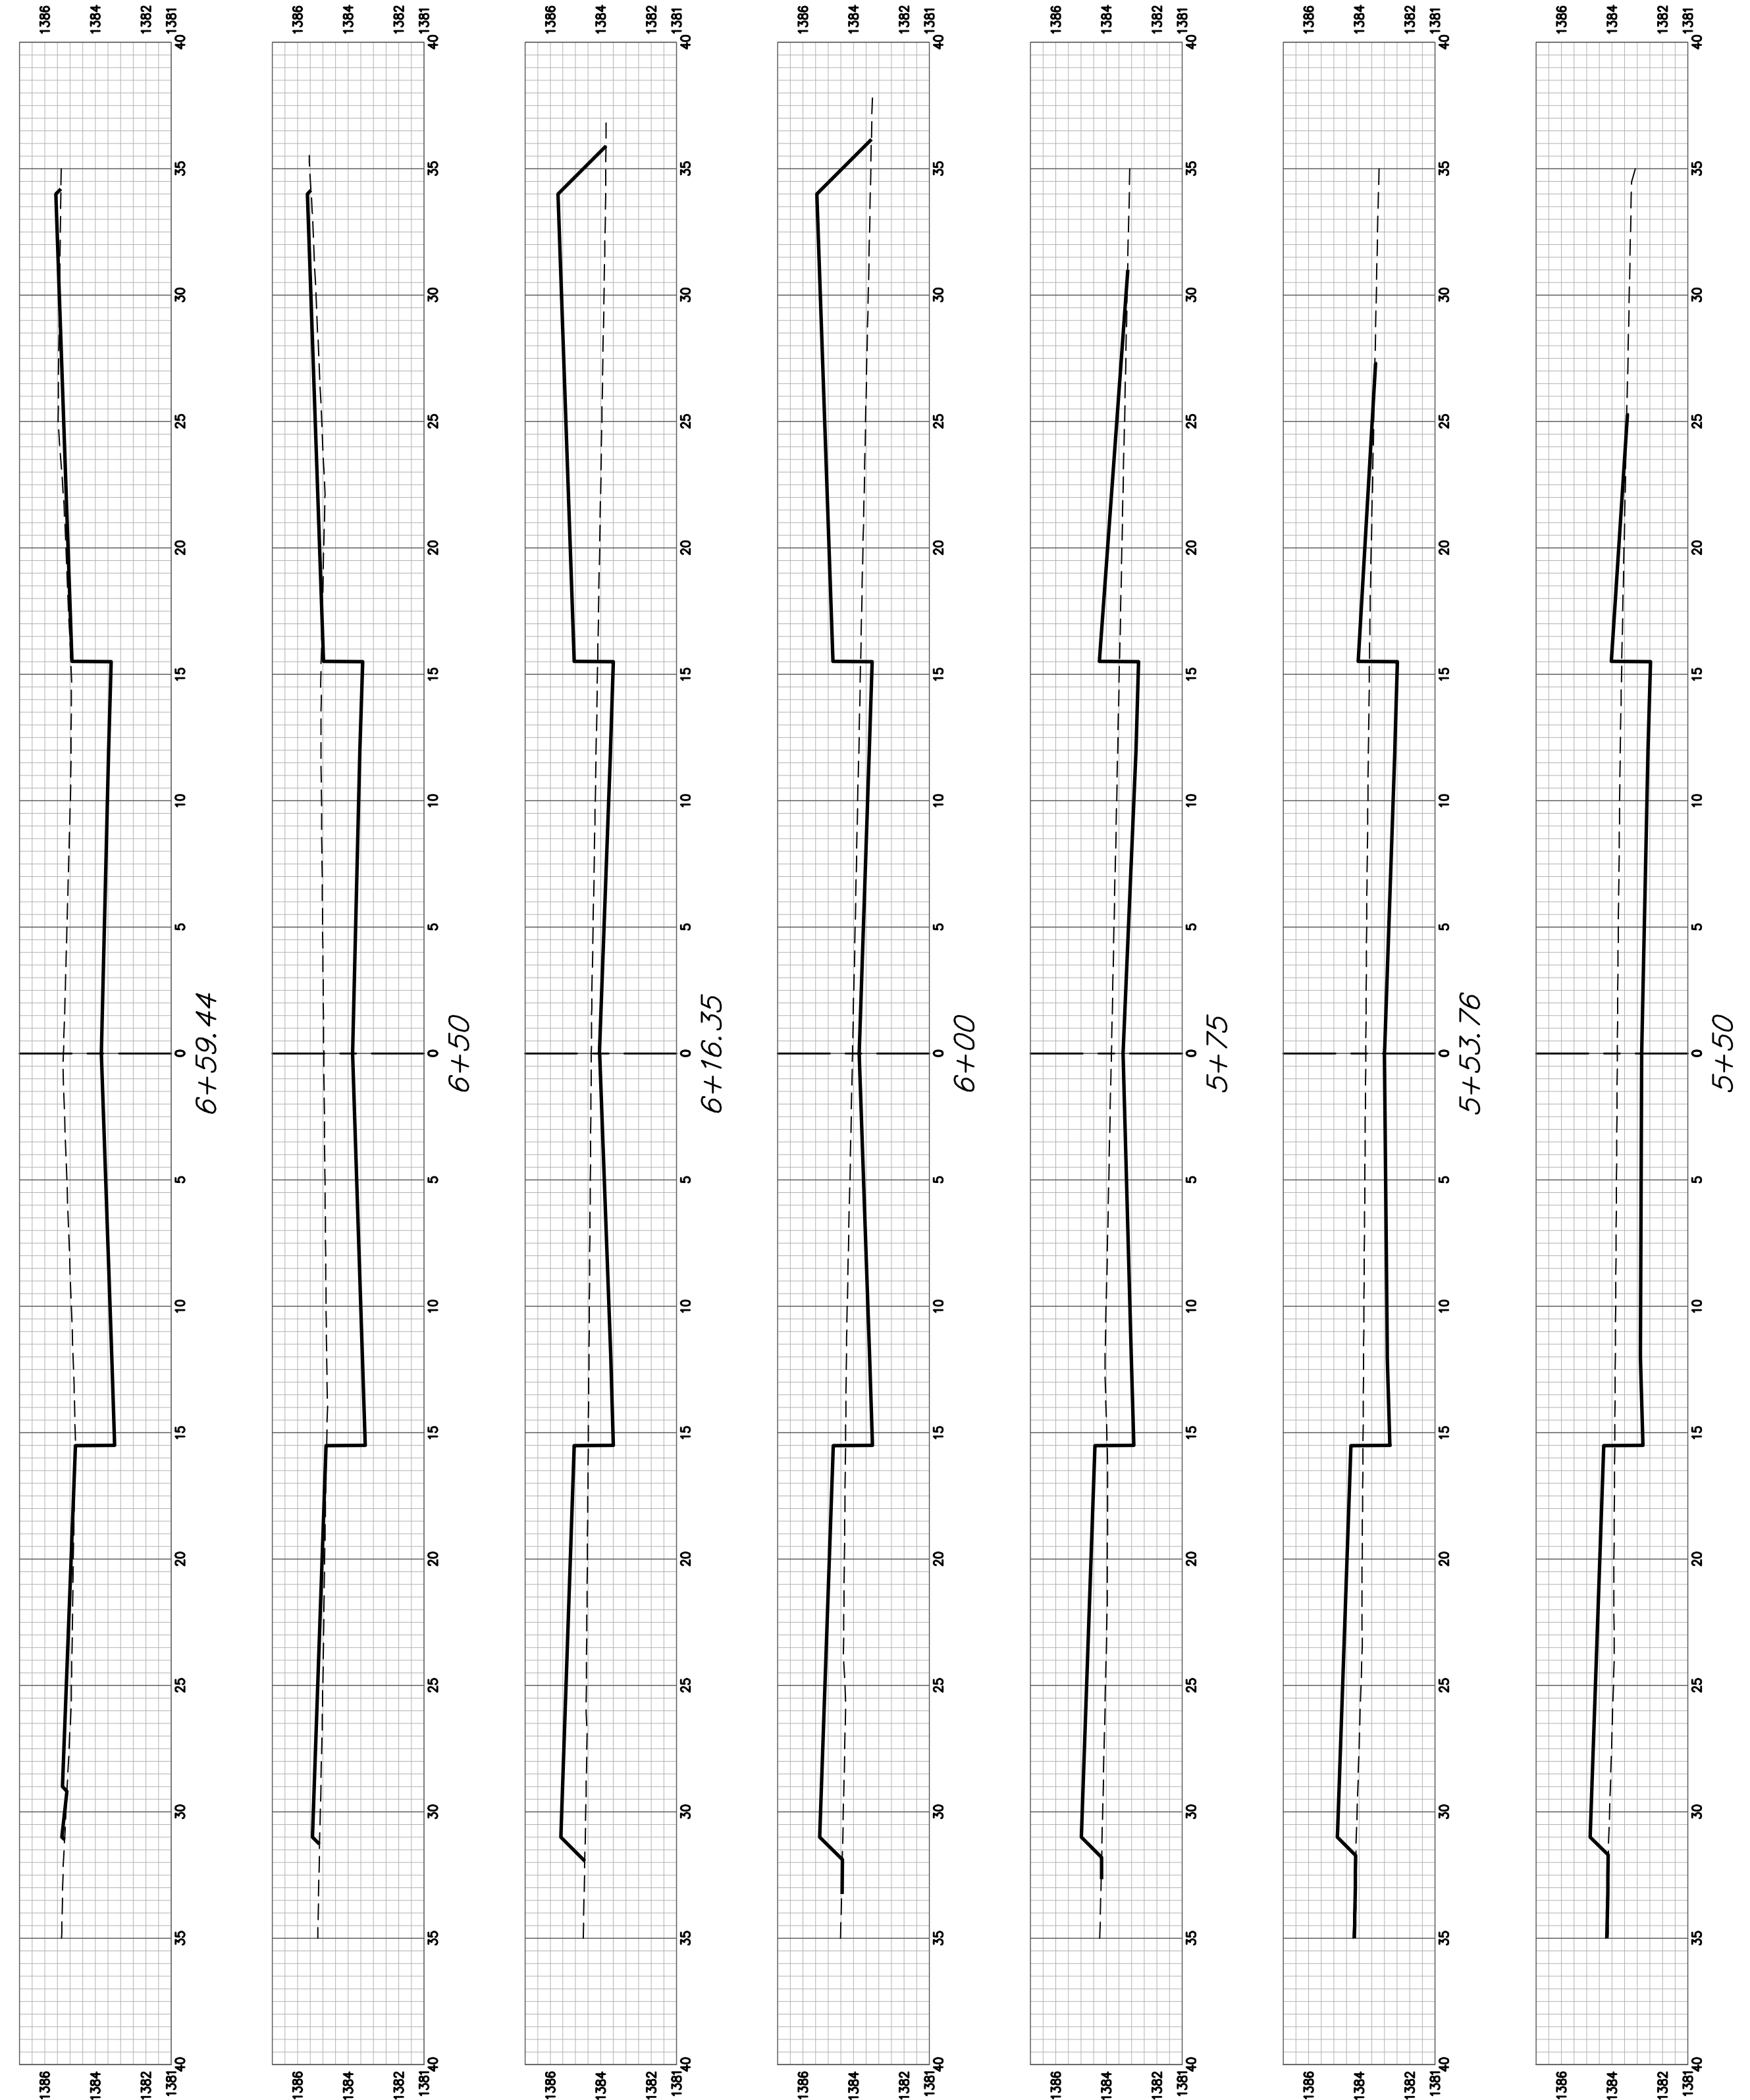

LAKEFRONT