


FAIRFAX CY Excavation (unadjusted)				FAIRFAX CY Compacted Fill (unadjusted)				FAIRFAX CY Loose Fill (unadjusted)			
Station	Area	Volume	Total	Station	Area	Volume	Total	Station	Area	Volume	Total
10+81.63	15.46	0.00	0.00	10+81.63	1.25	0.00	0.00	10+81.63	13.29	0.00	0.00
11+00	15.46	10.52	10.52	11+00	1.25	0.85	0.85	11+00	13.29	9.04	9.04
11+50	15.46	28.63	39.15	11+50	1.25	2.31	3.16	11+50	13.30	24.62	33.66
12+00	15.46	28.63	67.78	12+00	1.25	2.28	5.44	12+00	13.30	24.66	58.32
12+50	15.46	28.63	96.41	12+50	1.25	2.17	7.61	12+50	13.27	24.71	83.04
12+58.95	15.45	5.13	101.54	12+58.95	1.25	0.39	8.00	12+58.95	13.26	4.42	87.45



FAIRFAX

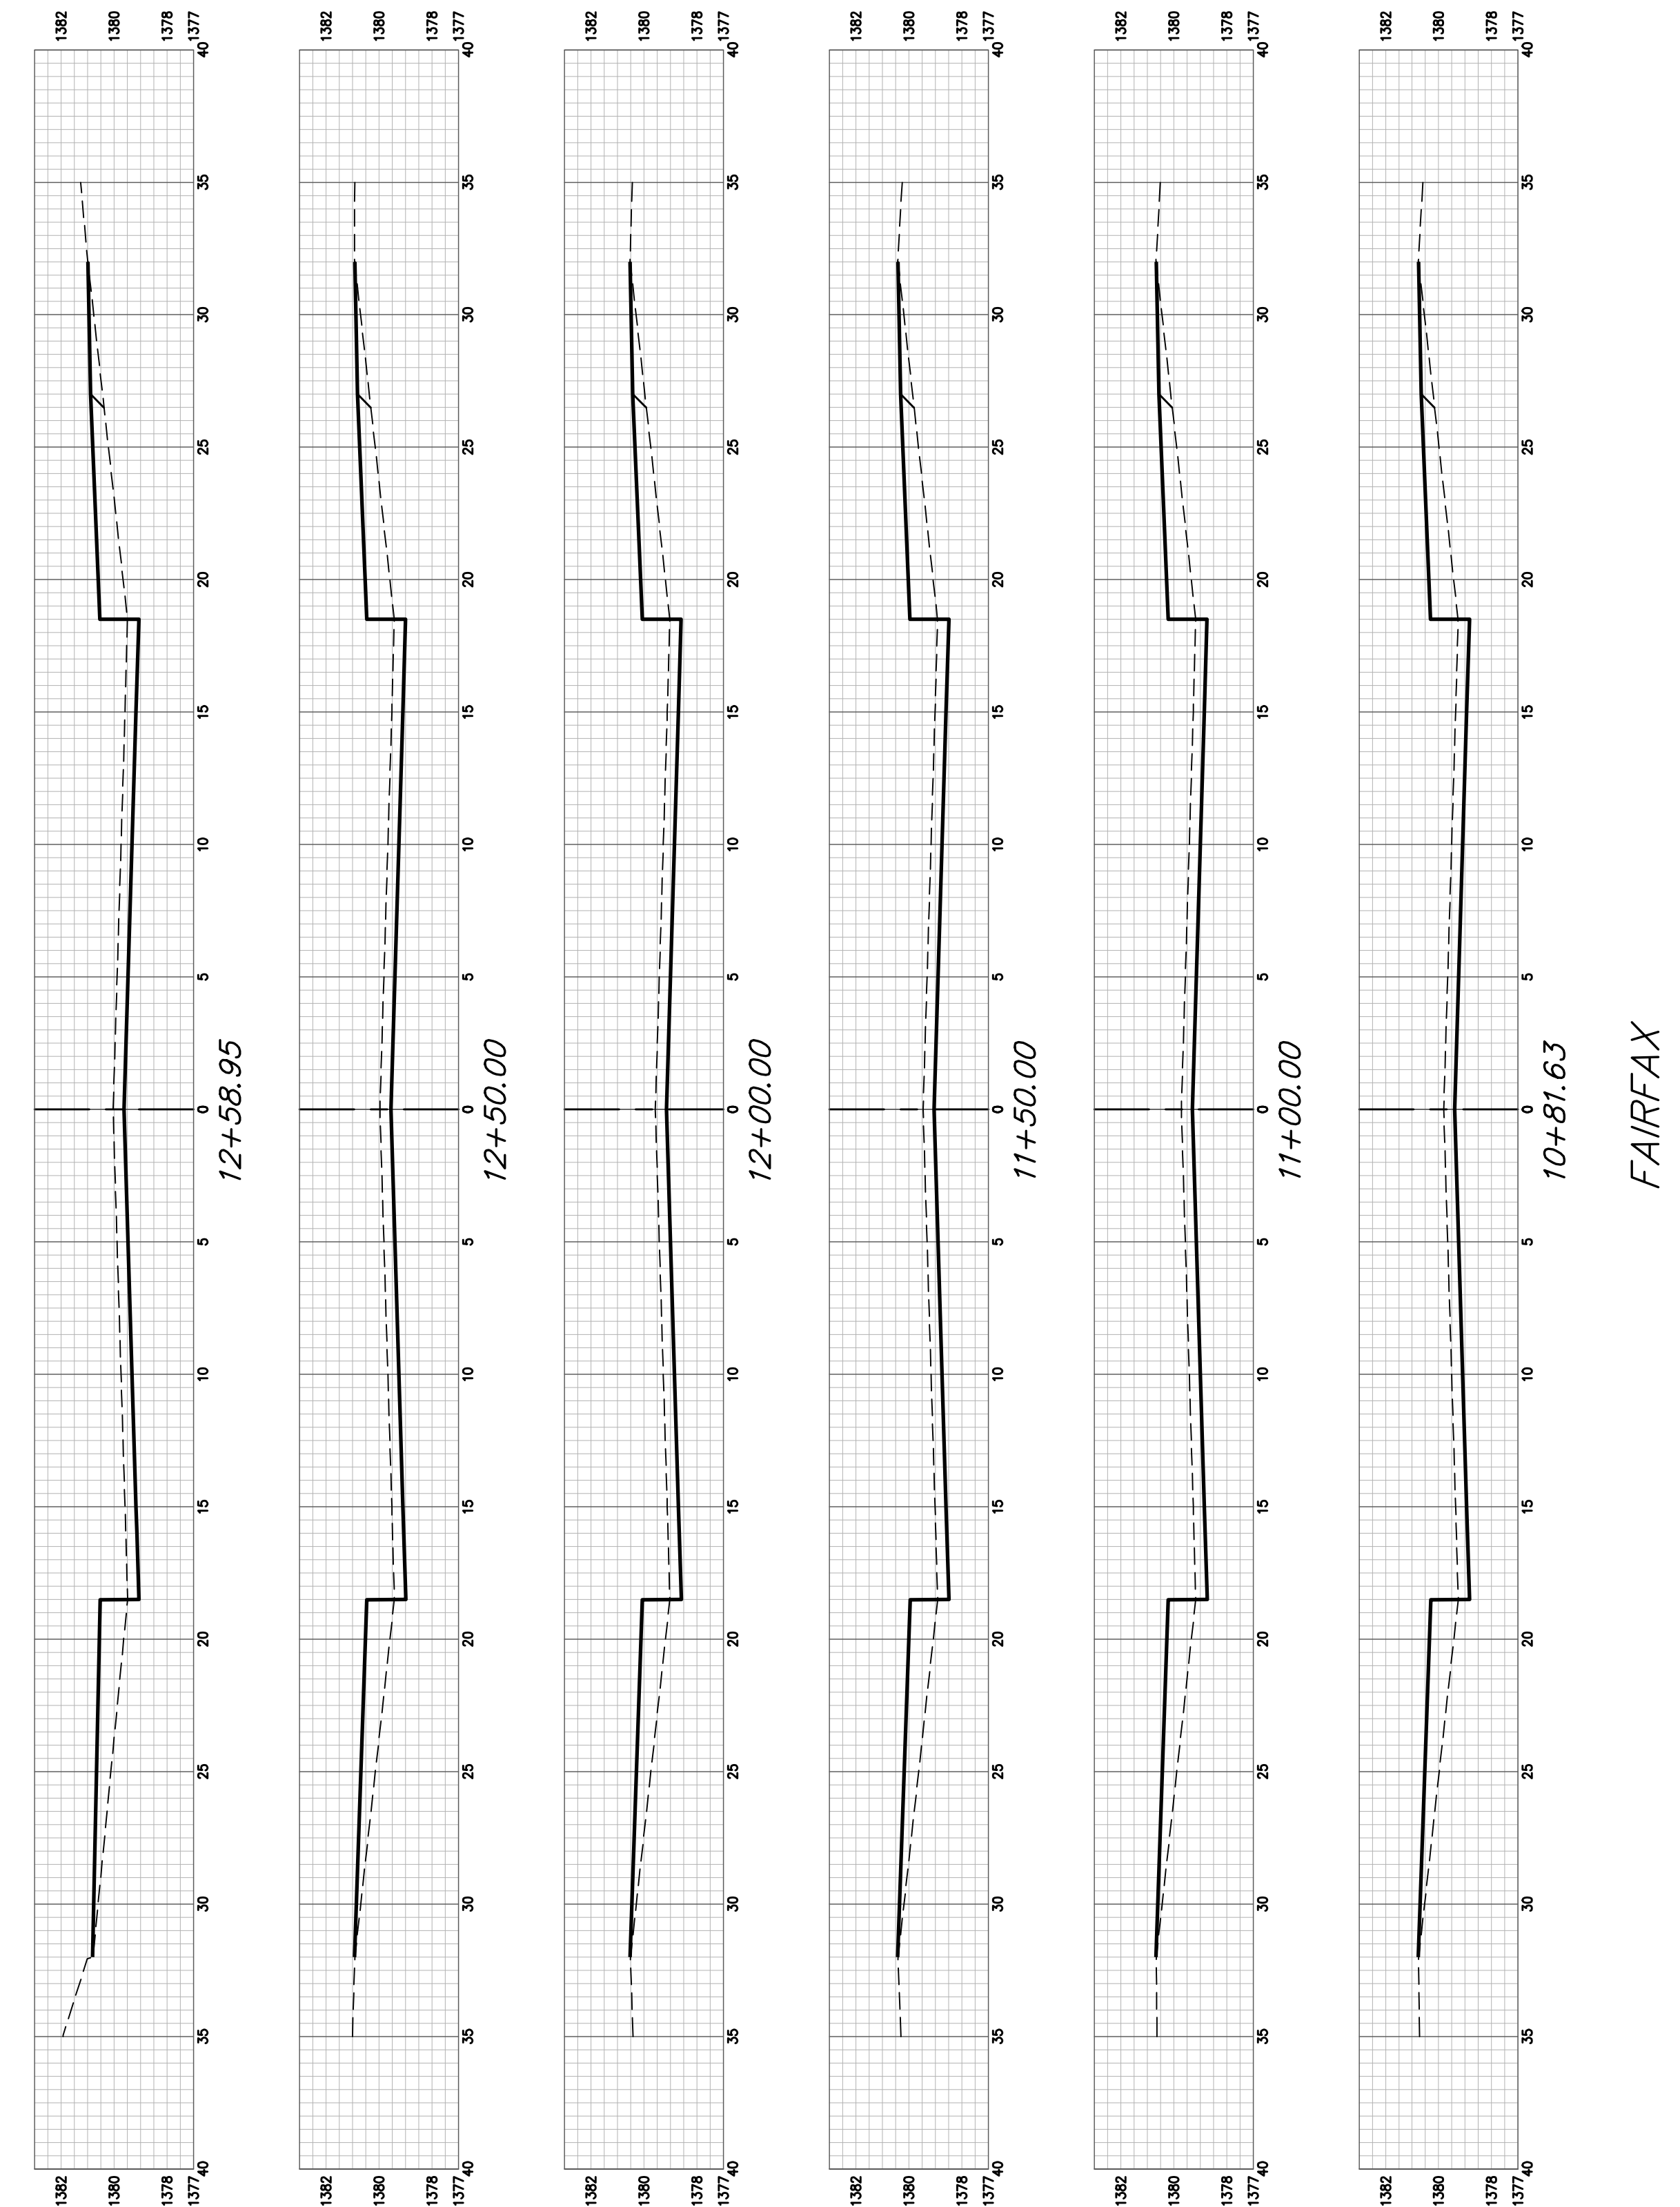