


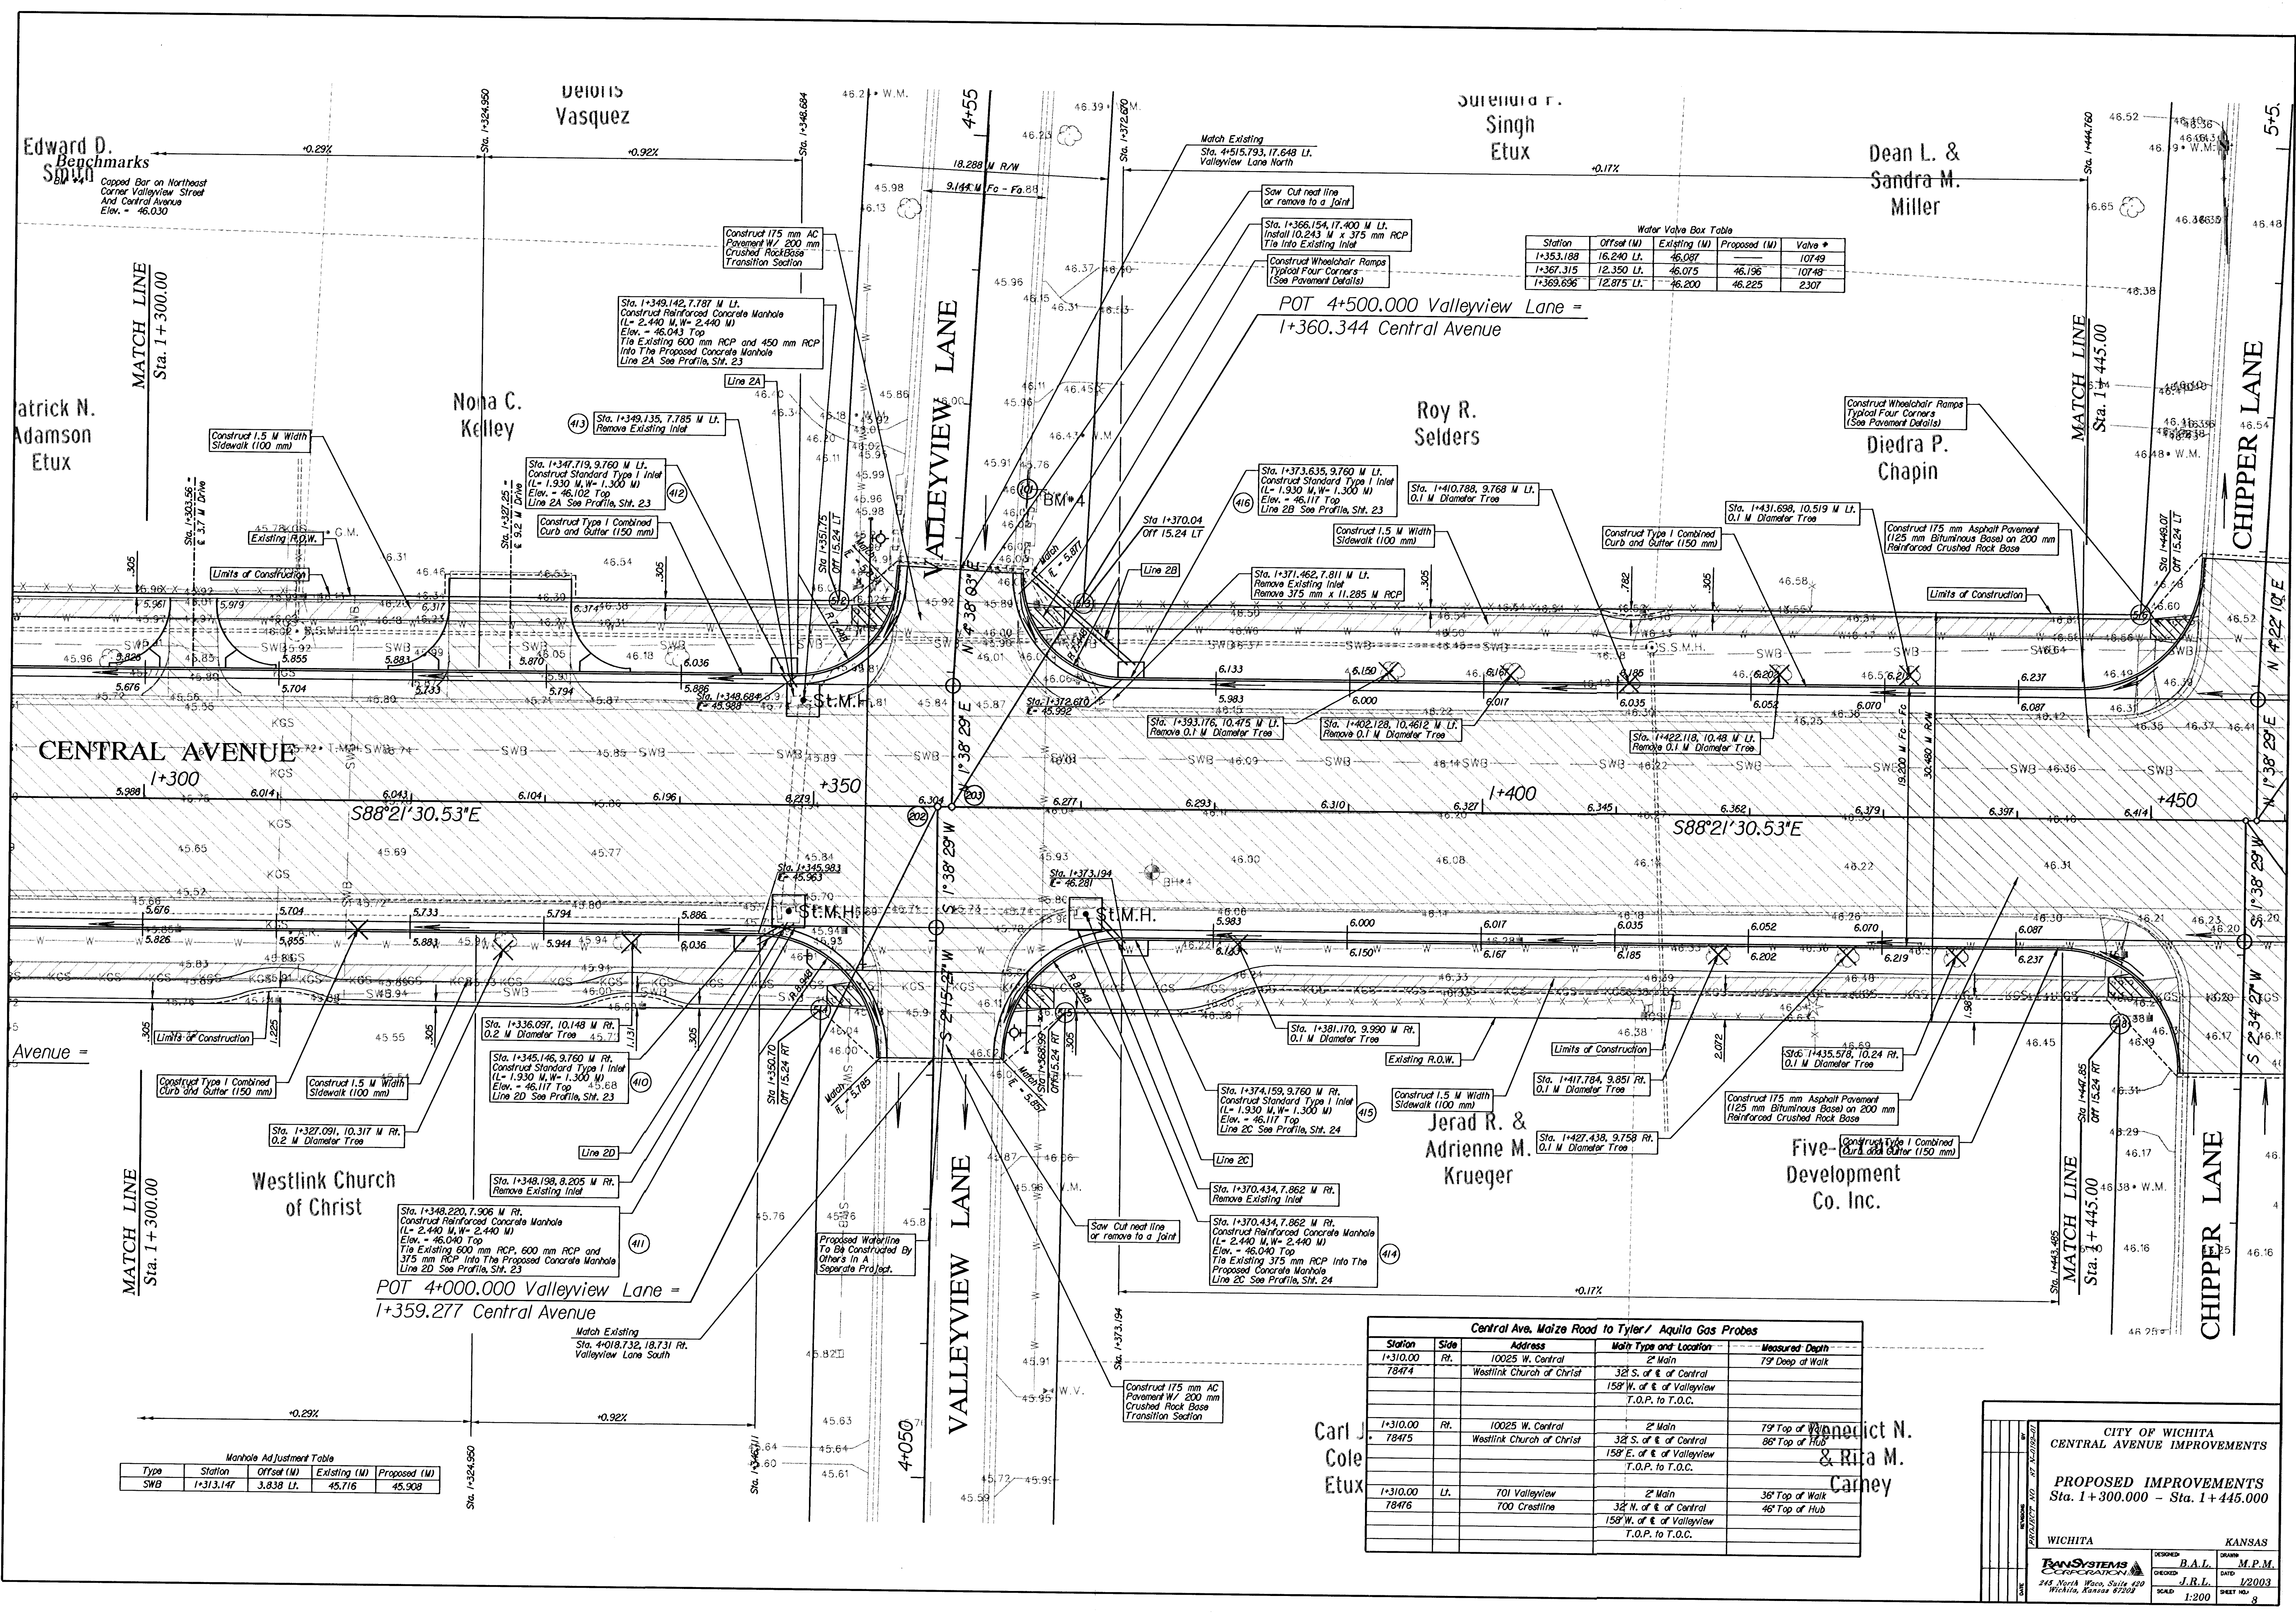

Water Valve Box Table

Station	Offset (M)	Existing (M)	Proposed (M)	Valve #
1+353.188	16.240 LT.	46.087	—	10749
1+367.315	12.350 LT.	46.075	46.196	10748
1+369.696	12.815 LT.	—	46.200	2307

Manhole Adjustment Table

Type	Station	Offset (M)	Existing (M)	Proposed (M)
SWB	1+313.147	3.838 LT.	45.716	45.908

Central Ave. Maize Road to Tyler / Aquila Gas Probes

Station	Side	Address	Match Type and Location	Measured Depth
1+310.00	Rt.	10025 W. Central	2" Main	79" Deep at Walk
78474		Westlink Church of Christ	3/8" S. of E. of Central	
			158' W. of E. of Valleyview	
			T.O.P. to T.O.C.	
1+310.00	Rt.	10025 W. Central	2" Main	79" Top of Hub
78475		Westlink Church of Christ	3/8" S. of E. of Central	88" Top of Hub
			158' E. of E. of Valleyview	
			T.O.P. to T.O.C.	
1+310.00	Lt.	701 Valleyview	2" Main	36" Top of Walk
78476		700 Crestline	3/8" N. of E. of Central	46" Top of Hub
			158' W. of E. of Valleyview	
			T.O.P. to T.O.C.	

CITY OF WICHITA
CENTRAL AVENUE IMPROVEMENTS

PROPOSED IMPROVEMENTS
Sta. 1+300.000 - Sta. 1+445.000

WICHITA KANSAS

DESIGNED BY: B.A.L. M.P.M.
CHECKED BY: J.R.L. M.P.M.
DATE: 12/2003
SCALE: 1:200 SHEET NO. 8