

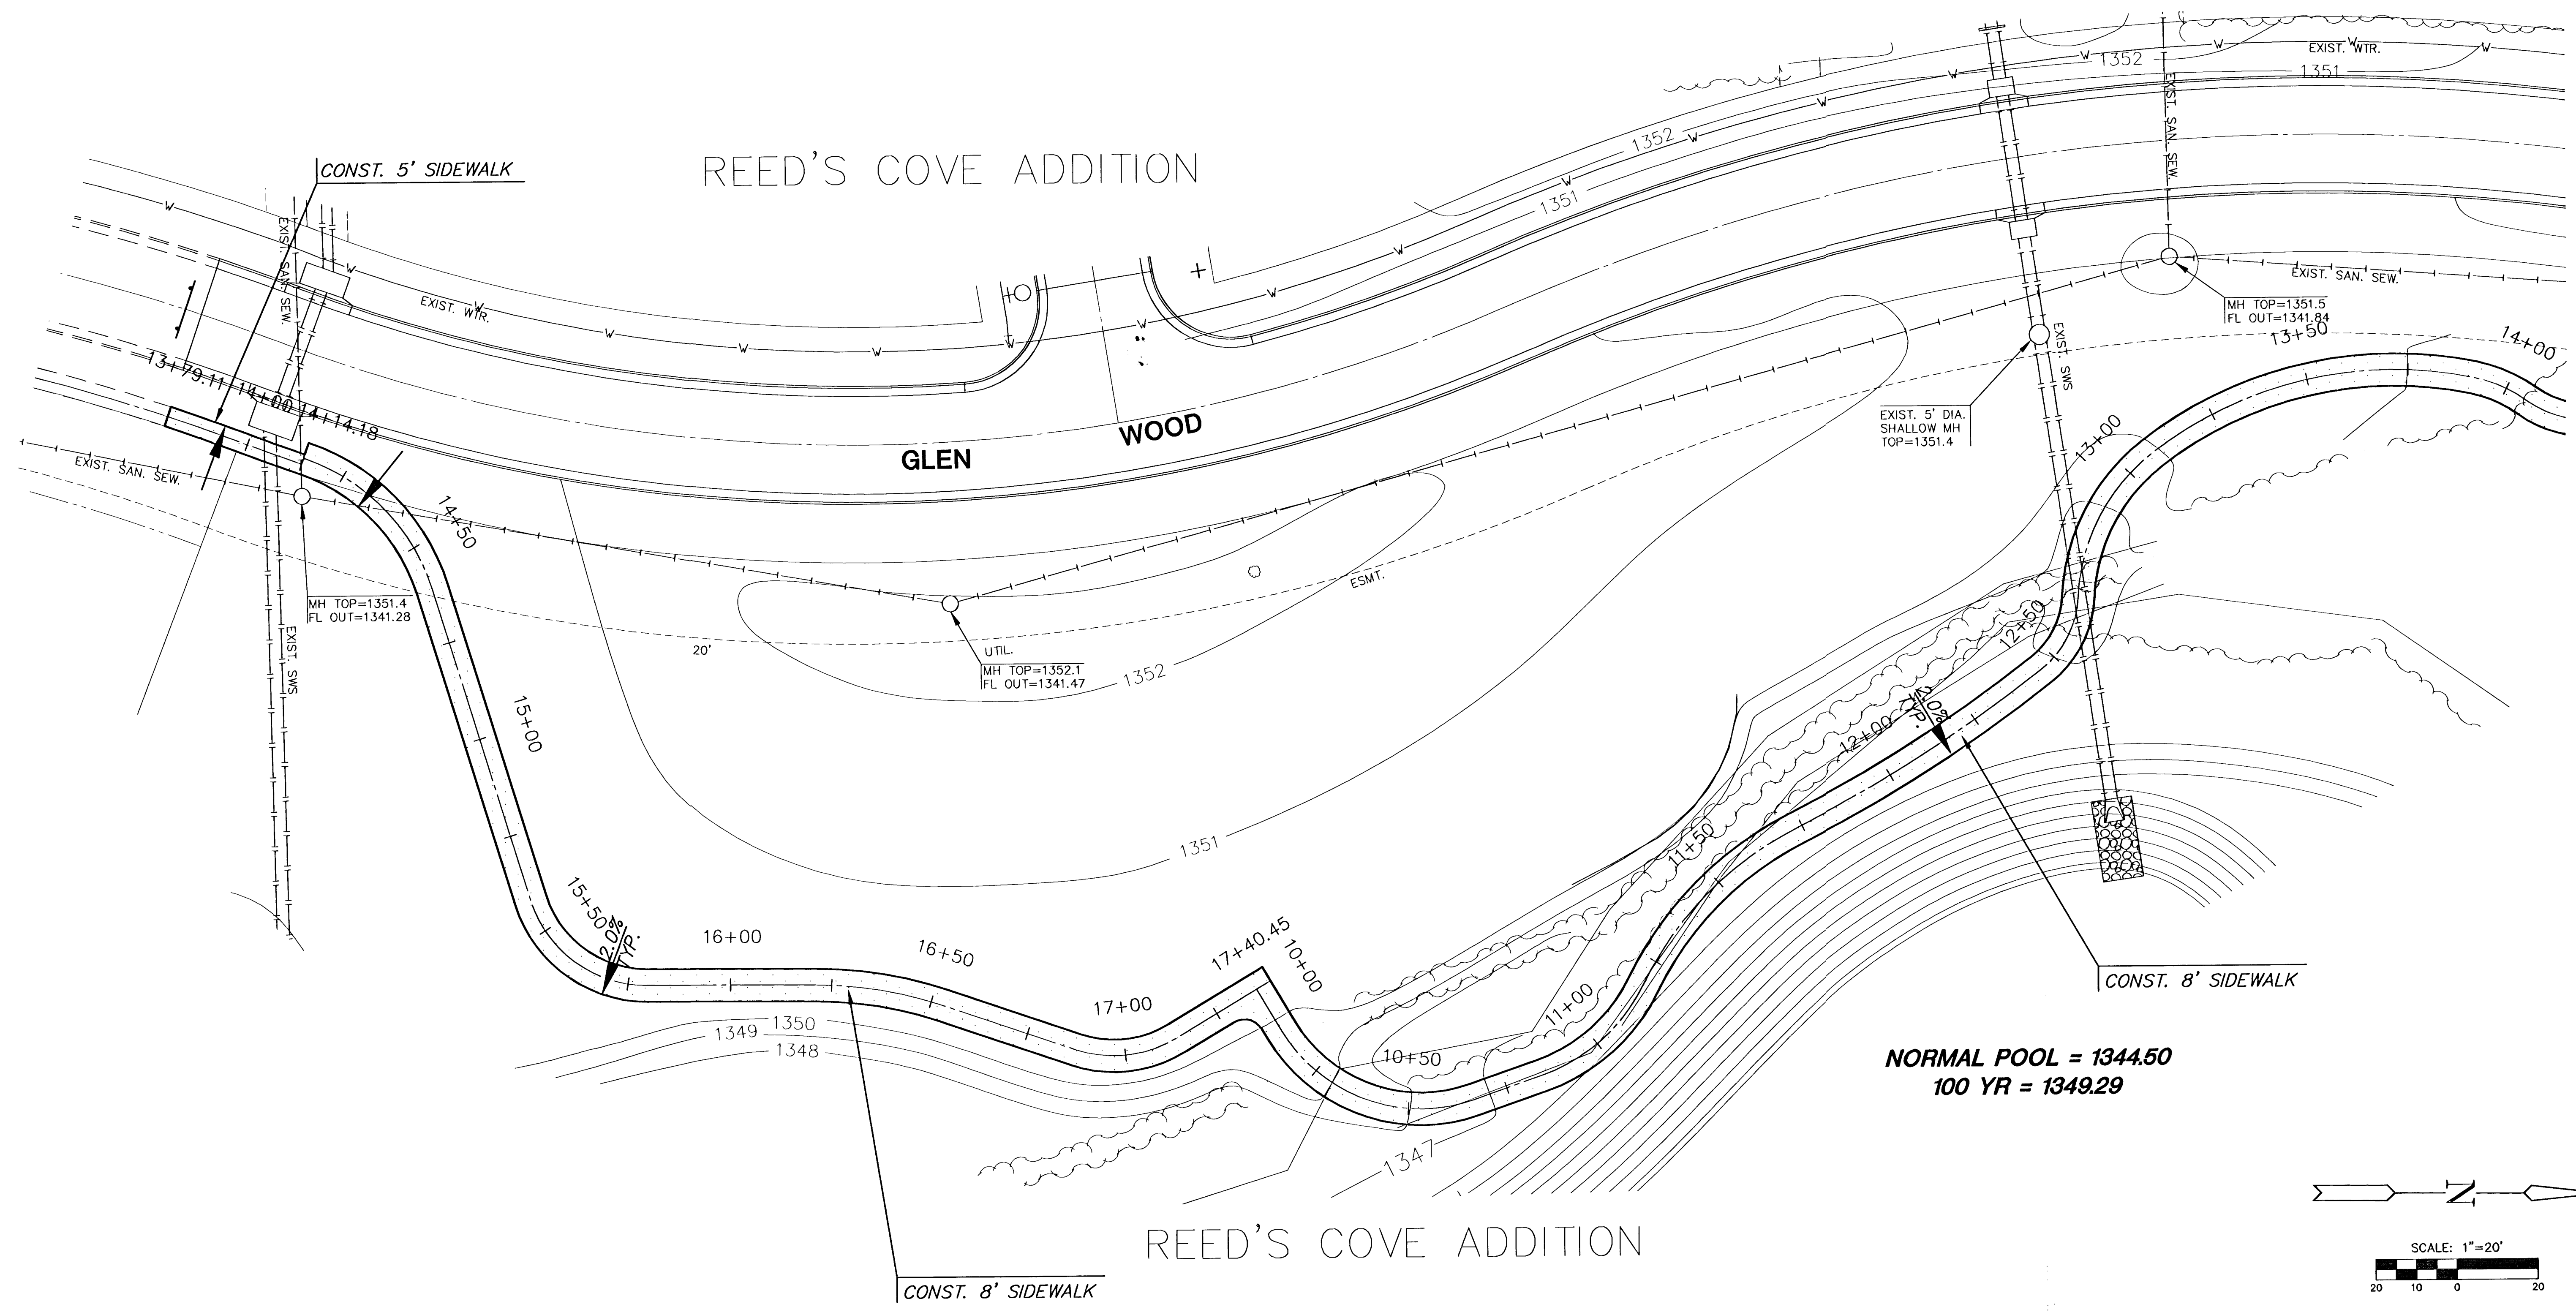


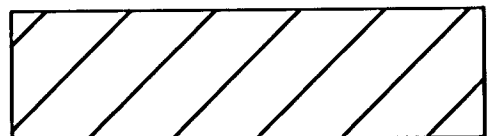

-  = TREE REMOVAL
-  = SIDEWALK

NOTES:

1. WHEN CONSTRUCTING SIDEWALK CONTRACTOR SHALL PROTECT EXISTING TREES. ANY TREE NOT MARKED WITH AN "X" THAT IS IN CONFLICT WITH CONSTRUCTION SHALL NEED ENGINEER'S APPROVAL BEFORE REMOVING. FIELD ADJUSTMENTS MAY BE MADE AT THE DIRECTION OF THE ENGINEER TO PRESERVE TREES.
2. SIDEWALK LONGITUDINAL GRADES SHALL NOT EXCEED 5.0% SLOPES EXCEPT AT RAMPS. CROSS SLOPE SHALL BE 2.0% IN DIRECTION NOTED. THE SIDEWALK ELEVATION SHALL BE CONSTRUCTED SO AS TO NOT IMPEDE OR HOLD WATER FROM RUNOFF.

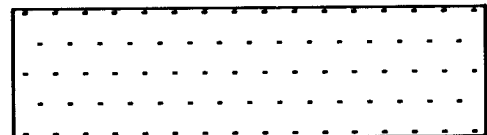

MKEC
ENGINEERING
CONSULTANTS
411 N. WEBB ROAD
WICHITA, KS. 67206
316-884-9600

REED'S COVE ADDITION
PROJECT NAME

SIDEWALK PLAN
SHEET TITLE

DFL DESIGN BY:	DMU DRAWN BY:	GJA CHECKED BY:
JUNE 2003 DATE	02121E5 JOB NO.	11 / 34 SHEET/OF