




CONTROL POINTS			
Point #	Northing	Easting	Desc.
182	1675560.74	1665959.74	CP182 / 60D SET
183	1675281.70	1665894.79	CP183 / 60D SET
184	1675107.49	1665970.31	CP184 / 60D SET
185	1674910.90	1666007.78	CP185 / 60D SET
186	1674675.13	1666008.10	CP186 / 60D SET
187	1674442.14	1666007.51	CP187 / 60D SET
188	1673445.49	1666503.86	CP188 / 60D SET
189	1673778.59	1666330.40	CP189 / 60D SET
190	1674016.20	1666369.76	CP190 / 60D SET

CONTROL POINTS			
Point #	Northing	Easting	Desc.
191	1674287.27	1666303.02	CP191 / 60D SET
192	1674466.54	1666364.91	CP192 / 60D SET
193	1674588.16	1666323.00	CP193 / 60D
194	1674877.86	1666416.70	CP194 / 60D SET
195	1674861.48	1666718.47	CP195 / 60D SET
196	1674958.12	1666516.79	CP196 / 60D SET
204	1675121.58	1666259.10	CP204 / 60D SET
205	1674717.92	1666391.62	CP205 / 60D
214	1674910.58	1669338.09	CP214 / 60D SET

CONTROL POINTS			
Point #	Northing	Easting	Desc.
215	1675084.83	1669148.23	CP215 / 60D SET
216	1674602.84	1669380.39	CP216 / 60D SET
217	1674641.13	1669202.96	CP217 / 60D SET
218	1674638.11	1668986.19	CP218 / 60D SET
233	1674306.10	1667782.39	CP 233 / 60D SET
234	1674257.72	1667538.90	CP 234 / 60D SET
235	1674302.50	1667251.93	CP 235 / 60D SET
236	1674551.62	1667232.43	CP 236 / 60D SET
237	1674865.84	1667354.99	CP 237 / 60D SET

CONTROL POINTS			
Point #	Northing	Easting	Desc.
238	1673904.87	1667024.06	CP 238 / 60D SET
239	1673984.80	1667189.62	CP 239 / 60D SET
240	1674934.18	1667860.87	CP 240 / 60D SET
241	1674864.32	1667995.77	CP 241 / 60D SET

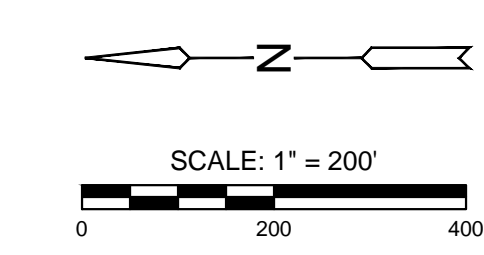

WATER MAIN REPLACEMENT PLANS FOR
SILVERDALE ADDITION PART A

©2017 MKEC Engineering All Rights Reserved www.mkec.com
These drawings and their contents, including, but not limited to, all concepts, designs, & ideas are the exclusive property of MKEC Engineering (MKEC), and may not be used or reproduced in any way without the express consent of MKEC.

SOUTH CONTROL

PROJECT NO.	448-90720	
DATE	SEPT. 2017	
SCALE	1" = 200'	
DESIGNED	DRAWN	CHECKED
DFL	JWC	GJA
NO.	REVISION	DATE
SHEET NO.		
04 OF 52		