
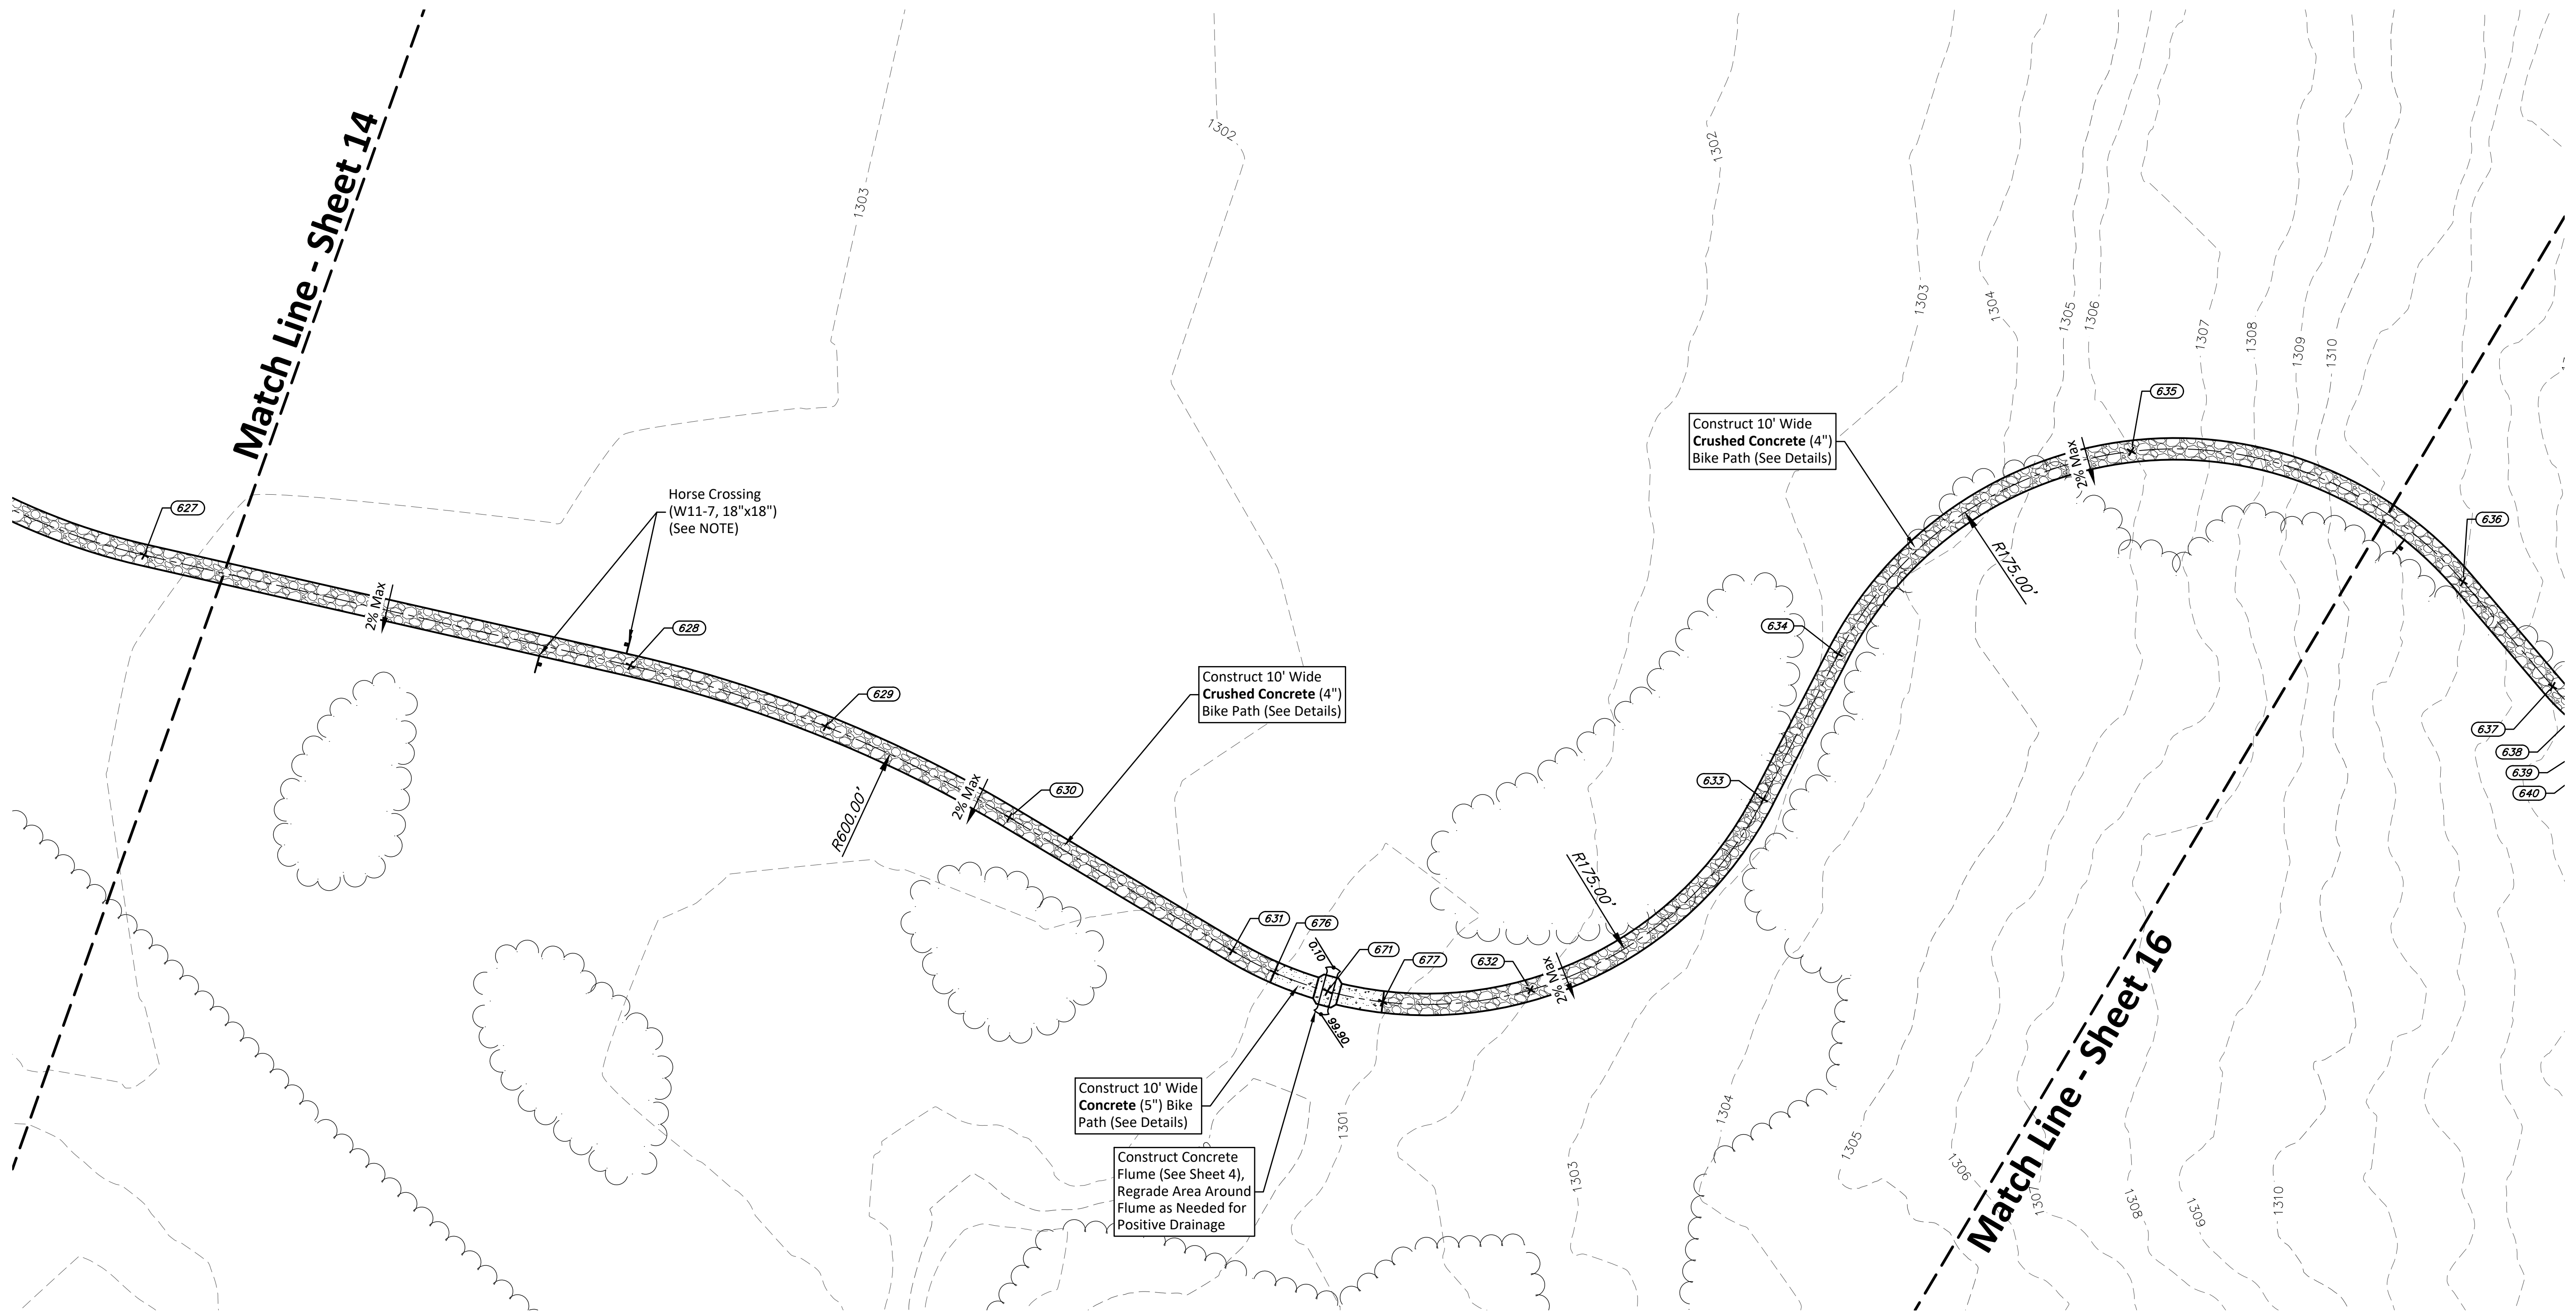
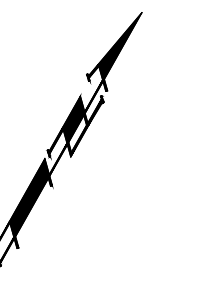


SCALE: 1" = 40'




POINT TABLE				
POINT #	RAW DESCRIPTION	NORTHING	EASTING	ELEVATION
628	crush conc	1670624.3812	1616733.5237	1301.82
629	crush conc	1670644.2912	1616826.0166	1301.57
630	crush conc	1670649.4142	1616920.4894	1301.66
631	crush conc	1670646.4462	1617040.3796	1301.04
632	crush conc	1670698.4807	1617169.2804	1301.44
633	crush conc	1670828.0672	1617219.5832	1302.83
634	crush conc	1670903.4970	1617216.7041	1303.12
635	crush conc	1671051.6131	1617288.5267	1305.49
671	flume	1670651.8207	1617087.9582	1300.73
676	start conc	1670647.2785	1617062.2967	1300.87
677	end conc	1670660.0781	1617112.5534	1300.58

NOTE: Crushed Concrete (4") & Concrete Sidewalk Transitions shall have Thickened Edge as Shown in Details (See Sheet 4)

NOTE: All Horse Crossing Signage Shown are Based on Preliminary Horse Trail Routes. Contractor to Finalize Horse Crossing Locations with the Parks Department Prior to Installation.

NOTE: Proposed Path to be Constructed Flush w/ Existing Surface Unless Otherwise Noted on Plans (Flume Grades). Path Cross Slope to Match Existing Runoff Direction as Shown on Plans and at 2% Max.

PAVING QUANTITIES PER SHEET		
BID	PAVEMENT TYPE	QUANTITIES
	Crushed Concrete Path (4")	11,071.31 sf
BASE	Concrete Sidewalk (5") (Reinforced)	556.47 sf

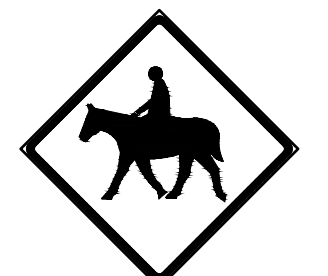

W11-7
18" X 18"