

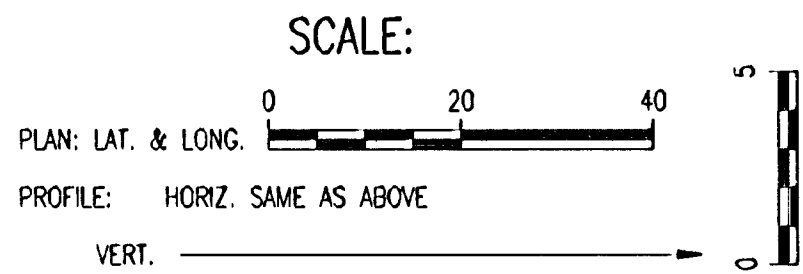


PROFILE		BY	DATE
CHECKED			
CHECKED			

N-1, 694,430.4043, E-1,587,927.4485
Sta. 0+00.0
Existing concrete MH
Adjust manhole top elevation to the
elevation provided in the profile.
Removed existing 6" Stub and
Core MH wall and install outside
drop connection. Seal new 8"
pipes to MH with an approved
waterstop gasket and non-shrink grout
(Grout opening left by removal of
existing 8" Stub). Construct a
minimum of 3' reinforced concrete
encasement from MH wall.
Reshape invert to provide smooth
flow. This work shall be considered
subsidiary to the price bid for pipe
in place.

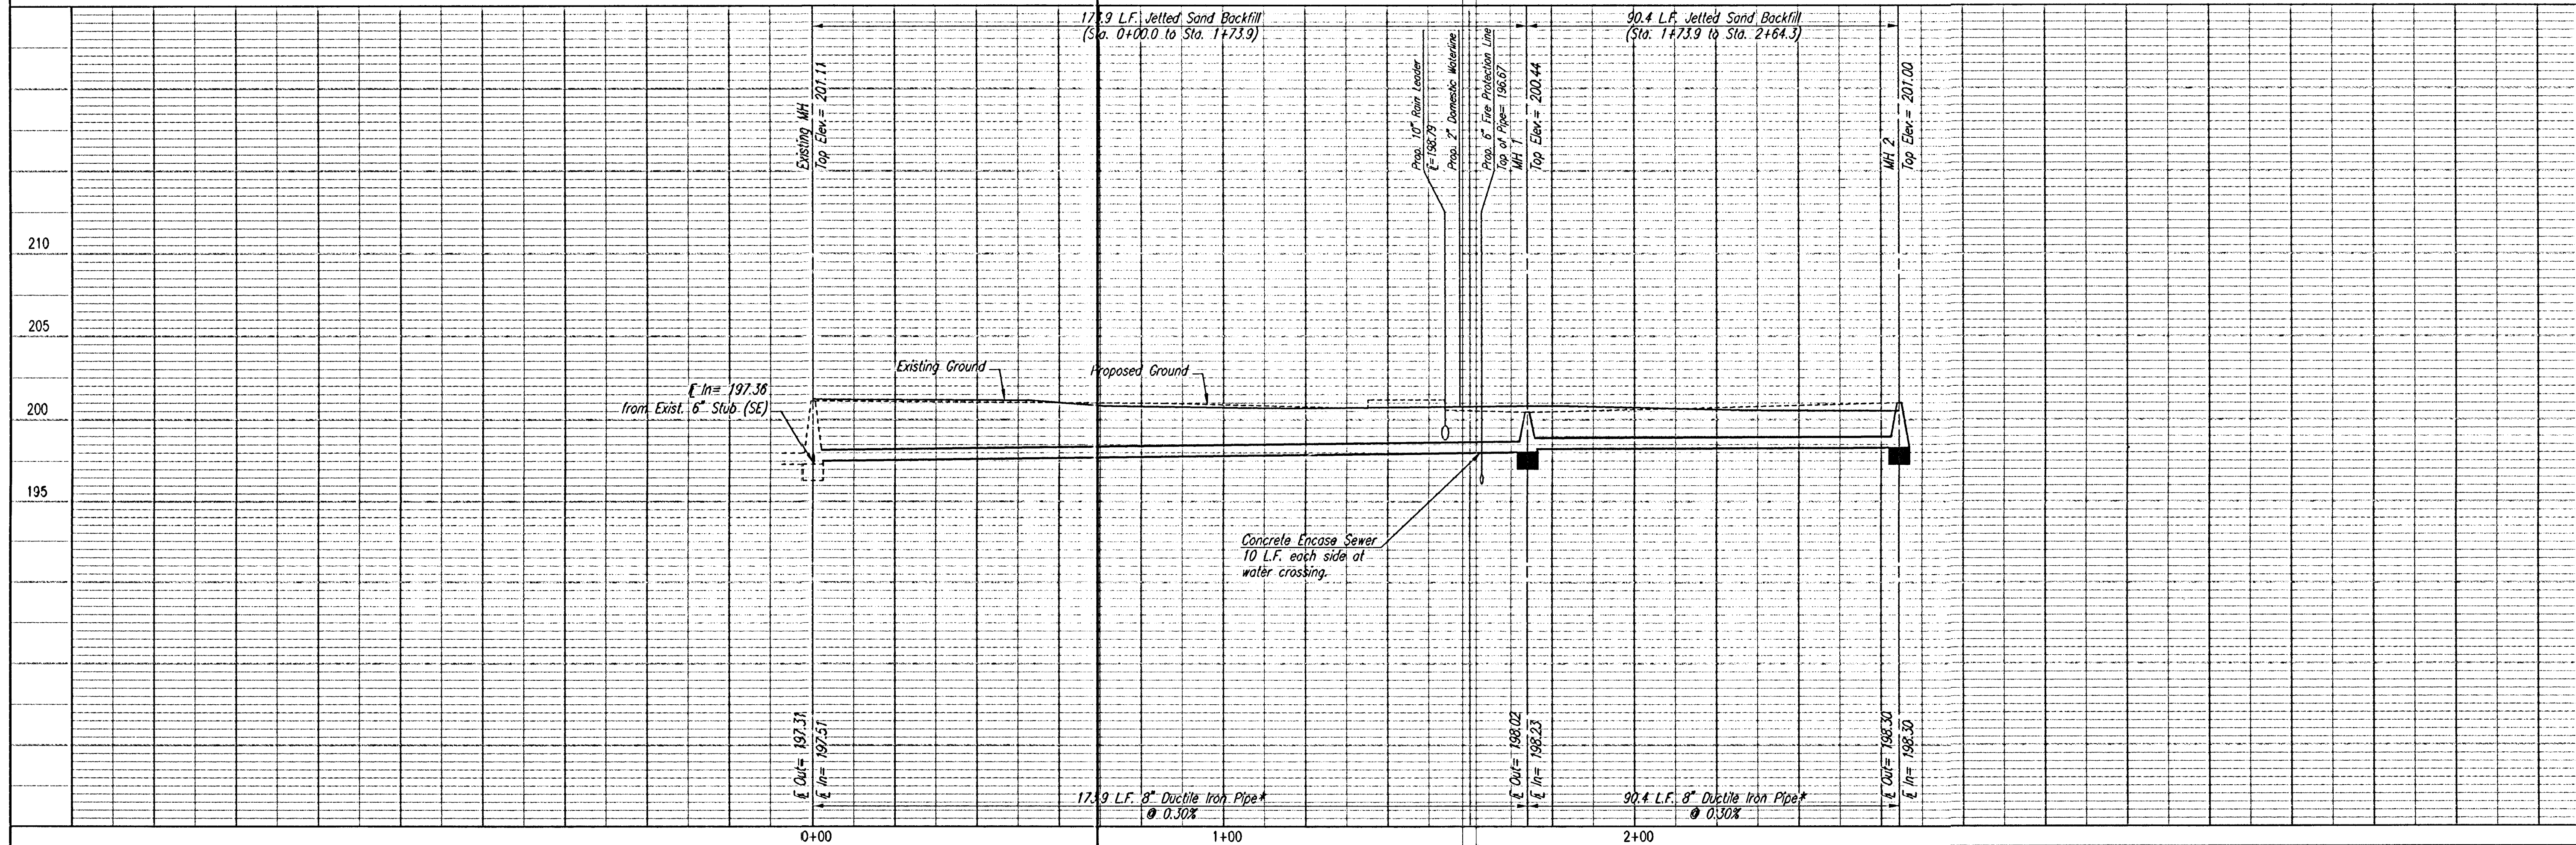

SEE SHEETS NO. 6.1
FOR PLAT COORDINATES

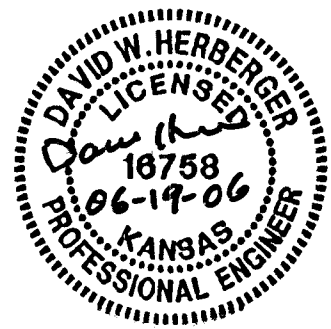

 Professional Engineering Consultants, P.A. 303 S. TORBEN • WICHITA, KANSAS 67202 316-262-2941 • FAX 316-262-3003	CHEDDAR'S THE GATEWAY CENTER 2ND ADDITION	
	SANITARY SEWER LINE NO. 1	
Designed By DWH Drawn By SAW	Job No. 35-06251 Date June 2006	JAMES L. ARMOUR, P.E. — CITY ENGINEER CITY OF WICHITA PRIVATE PROJECT NO. 1675 PPS. (607861)
Sheet C4.3		