


Blackstone CY Excavation (unadjusted)				Blackstone CY Compacted Fill (unadjusted)				Blackstone CY Loose Fill (unadjusted)			
Station	Area	Volume	Total	Station	Area	Volume	Total	Station	Area	Volume	Total
1+73.89	27.40	0.00	0.00	1+73.89	0.00	0.00	0.00	1+73.89	0.02	0.00	0.00
2+07.89	21.88	31.03	31.03	2+07.89	1.25	0.79	0.79	2+07.89	3.01	1.90	1.90
2+42.35	8.74	19.54	50.56	2+42.35	2.94	2.68	3.47	2+42.35	10.78	8.80	10.70
3+00	10.62	21.05	71.62	3+00	2.34	6.34	9.81	3+00	10.93	21.67	32.37
3+34.16	10.57	13.55	85.17	3+34.16	0.04	1.71	11.52	3+34.16	9.98	12.54	44.91
3+60.89	21.05	16.36	101.53	3+60.89	0.12	0.08	11.60	3+60.89	5.13	7.08	51.99
3+94.50	11.41	20.66	122.19	3+94.50	0.06	0.11	11.71	3+94.50	6.71	7.12	59.11
4+50	11.75	23.81	146.00	4+50	1.95	2.07	13.78	4+50	6.17	13.24	72.35
5+00	21.05	30.37	176.37	5+00	1.87	3.54	17.31	5+00	4.88	10.23	82.58
5+50	16.54	34.81	211.18	5+50	1.45	3.07	20.38	5+50	4.34	8.54	91.12
6+03.65	6.94	23.33	234.51	6+03.65	4.25	5.66	26.04	6+03.65	6.96	11.23	102.35
6+37.76	14.42	13.49	248.00	6+37.76	3.09	4.64	30.68	6+37.76	5.68	7.98	110.34
6+71.65	16.67	19.51	267.51	6+71.65	1.21	2.70	33.38	6+71.65	4.70	6.51	116.85
7+00	20.22	19.37	286.88	7+00	0.24	0.76	34.14	7+00	3.33	4.21	121.06
7+50	25.42	42.26	329.13	7+50	0.00	0.23	34.36	7+50	2.45	5.35	126.41
8+00	47.81	67.80	396.93	8+00	0.00	0.00	34.36	8+00	0.52	2.75	129.16
8+50	34.27	76.00	472.93	8+50	0.00	0.00	34.36	8+50	1.26	1.65	130.81
9+00	14.77	45.51	518.44	9+00	2.35	2.23	36.59	9+00	11.01	11.22	142.03
9+50	16.41	29.07	547.51	9+50	4.15	6.91	43.50	9+50	12.43	20.76	162.79
9+80.78	18.55	20.03	567.54	9+80.78	2.06	4.06	47.56	9+80.78	8.34	11.61	174.40
10+18.37	26.37	30.77	598.31	10+18.37	2.94	3.75	51.31	10+18.37	4.52	9.05	183.45
10+52.37	16.24	26.83	625.14	10+52.37	4.68	4.80	56.11	10+52.37	9.24	8.66	192.11
11+00	20.59	32.47	657.61	11+00	7.72	10.94	67.06	11+00	9.03	16.11	208.22
11+36.27	47.29	45.58	703.20	11+36.27	9.03	11.25	78.30	11+36.27	9.76	12.61	220.83

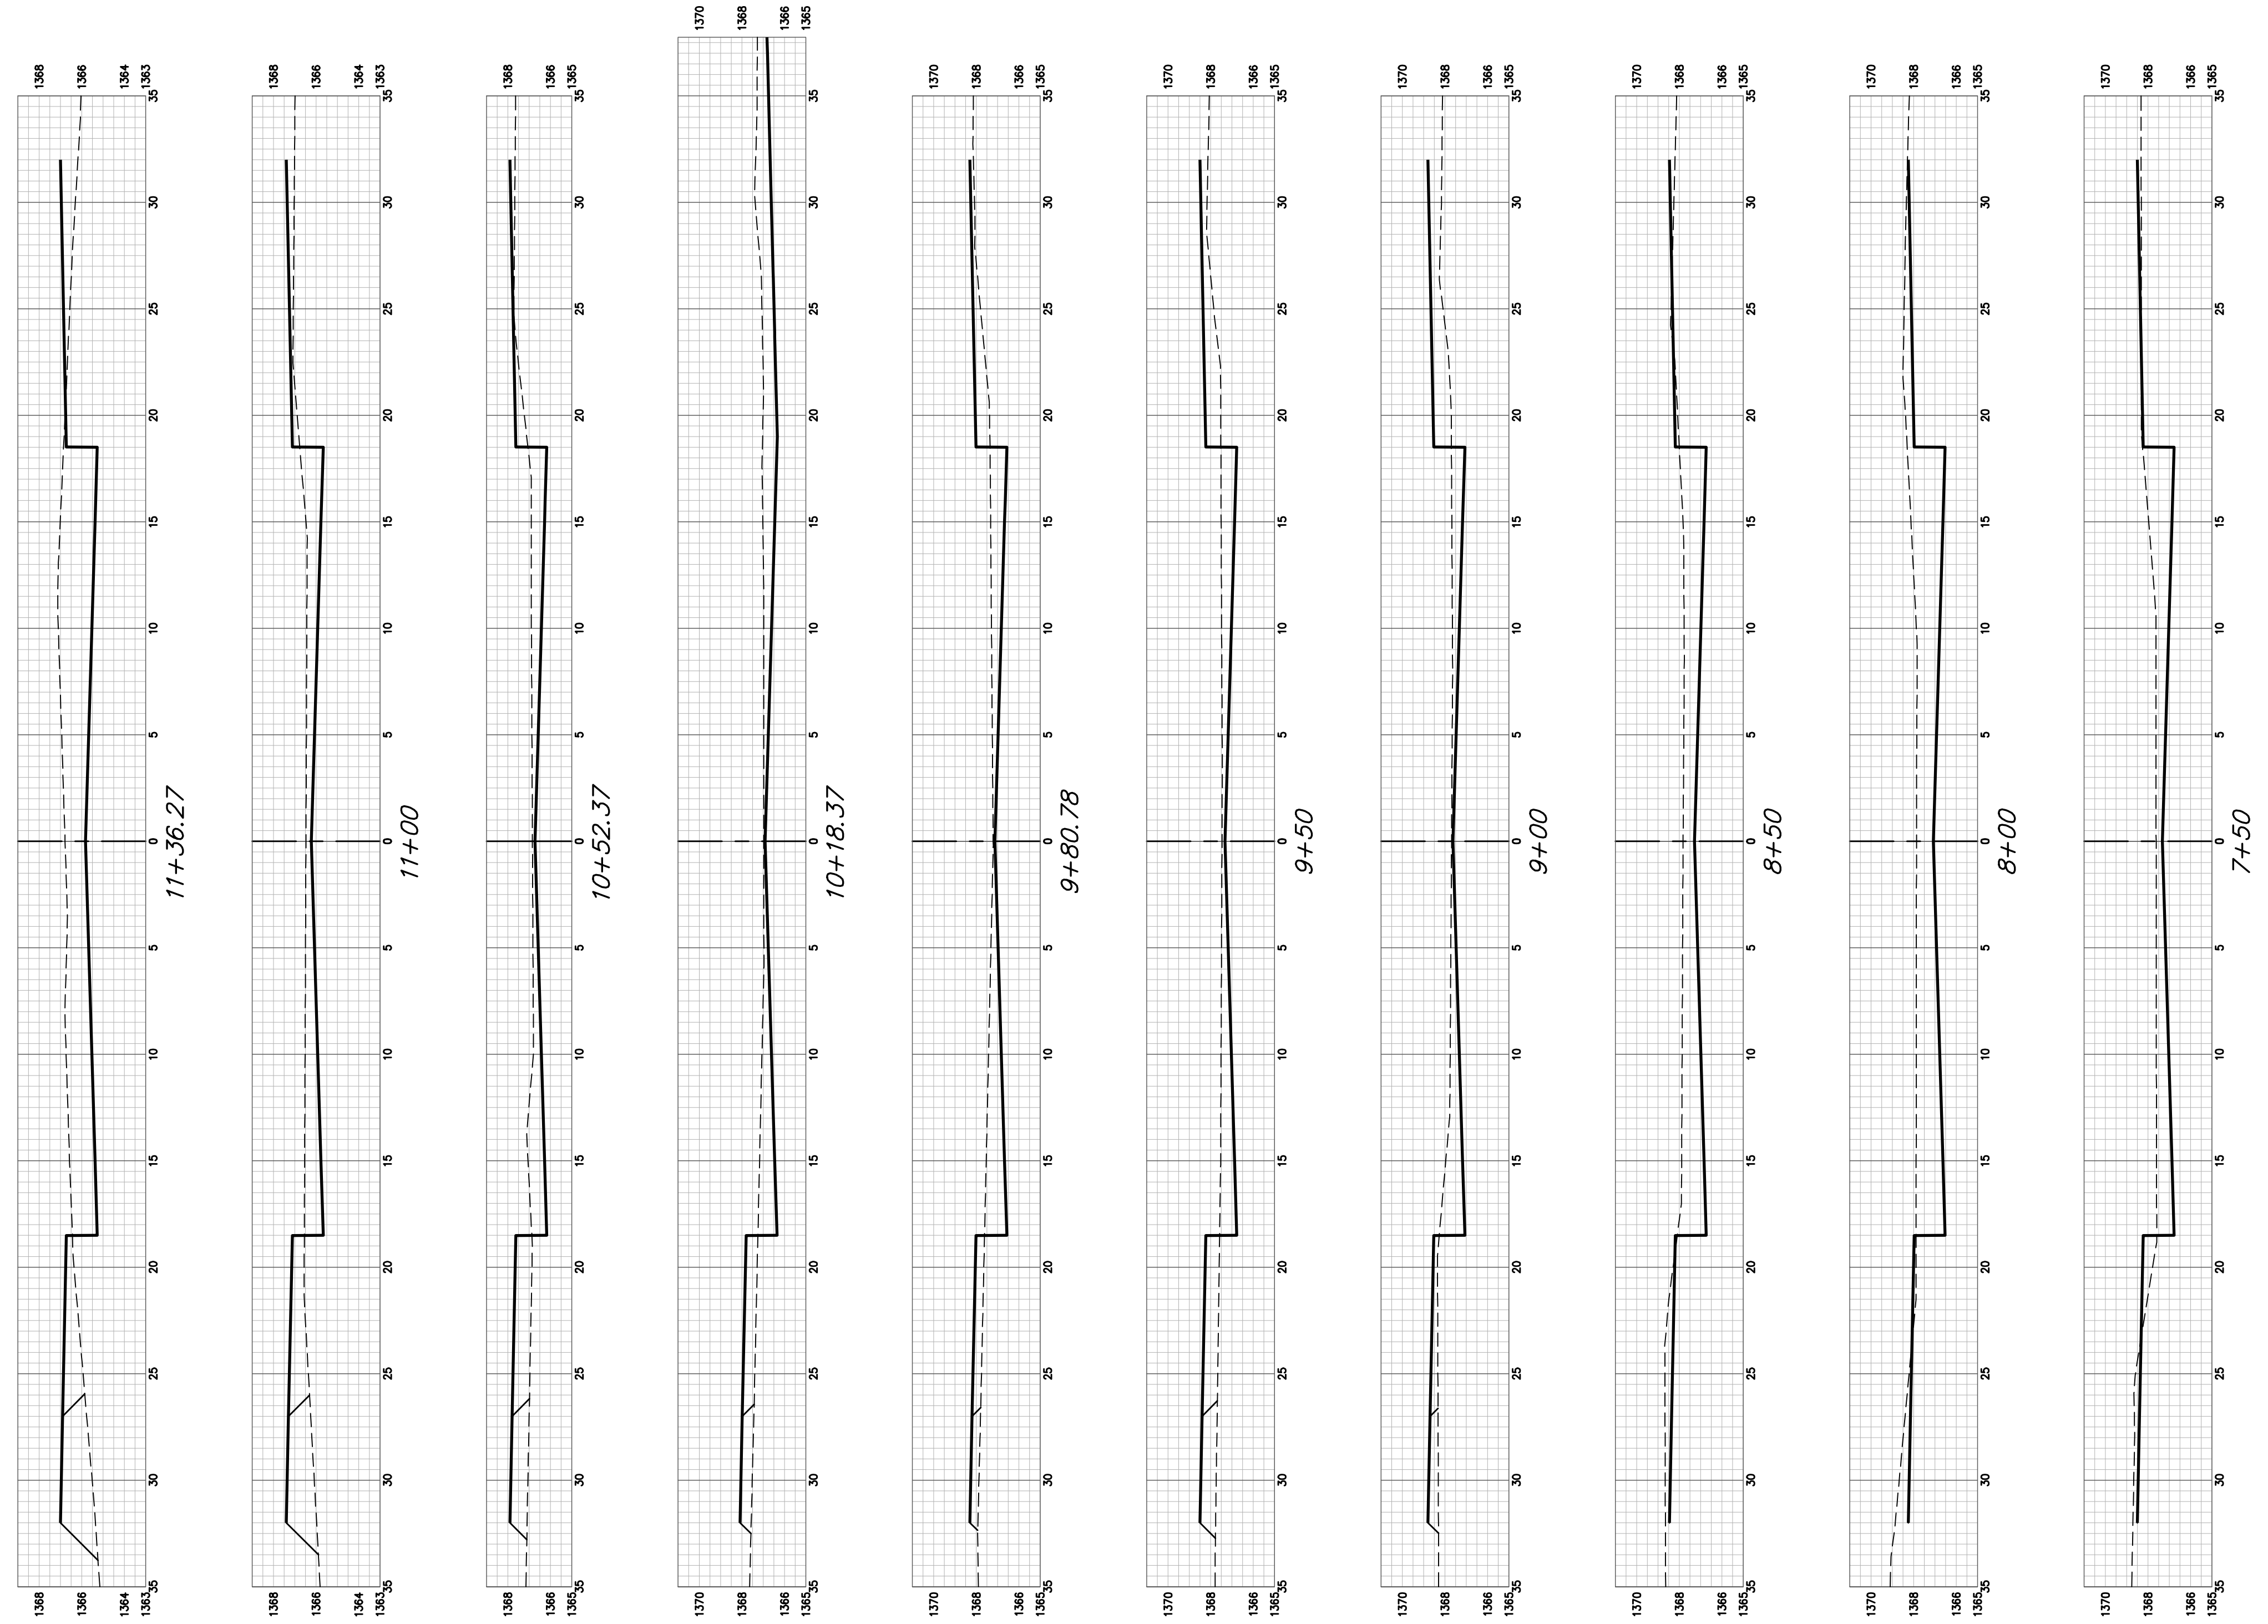

BLACKSTONE