


THUNDER CY Excavation (unadjusted)				THUNDER CY Loose Fill (unadjusted)				THUNDER CY Compacted Fill (unadjusted)			
Station	Area	Volume	Total	Station	Area	Volume	Total	Station	Area	Volume	Total
0+90	22.53	0.00	0.00	0+90	12.83	0.00	0.00	0+90	0.00	0.00	0.00
1+00	99.47	22.59	22.59	1+00	0.00	2.38	2.38	1+00	0.00	0.00	0.00
1+50	99.39	184.13	206.72	1+50	0.00	0.00	2.38	1+50	0.00	0.00	0.00
2+00	36.60	125.92	332.64	2+00	1.73	1.60	3.98	2+00	0.00	0.00	0.00
2+10.02	30.65	12.48	345.12	2+10.02	4.71	1.20	5.18	2+10.02	0.00	0.00	0.00

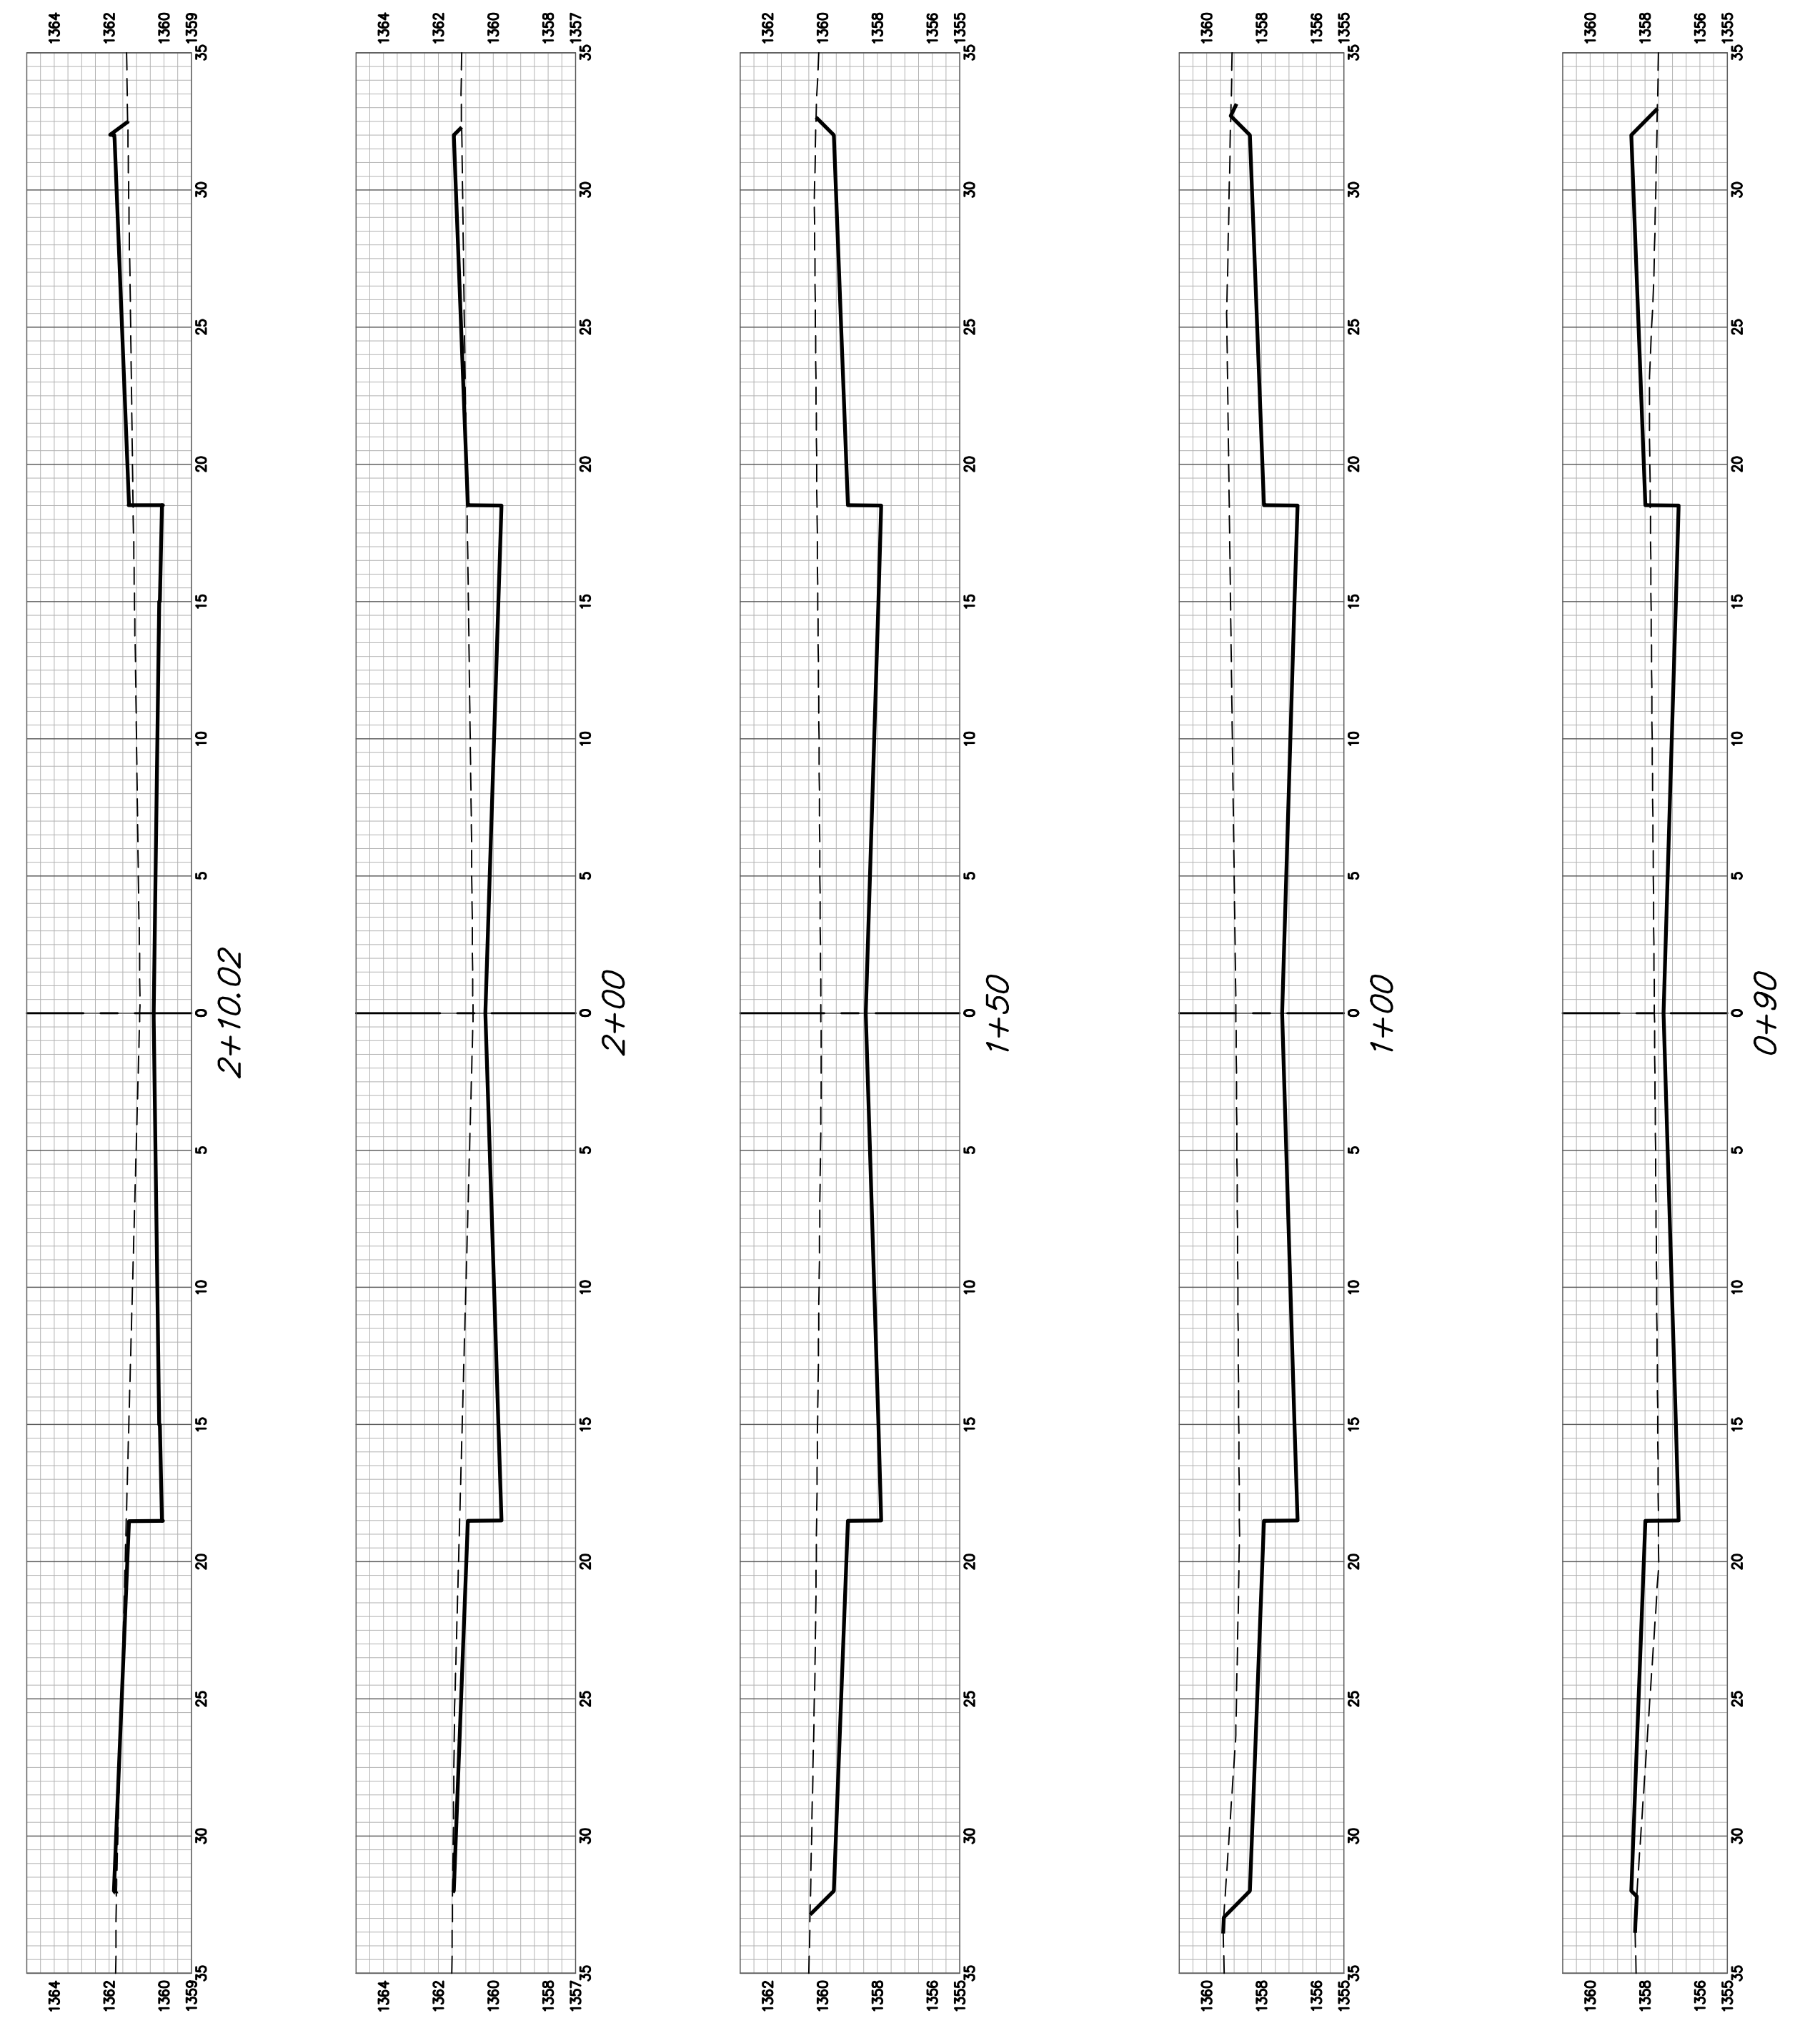

THUNDER