

Match Line Sta. 5+50

Existing Pavement, Curb and Gutter to be Removed and Replaced as necessary for construction. No additional pay shall be made for this work, Subsidiary to other pay items.

Contractor to coordinate with Westar to support pole during construction.


SEE DISCONNECT #26, SHEET NO. 52

N 1669675.07 E 1653555.21 STA. 0+00.00, LINE 14 = STA. 1+19.85 AMSDEN, 24.00' LT. CONNECT TO EXIST. 8" MAIN * 1-8" TAPPING VALVE * 1-8"X8" TAPPING SLEEVE ** 1-6" VALVE BOX ASS'Y. VALVE BOX ELEV. 1282.00 * SUPPLIED AND INSTALLED BY CITY OF WICHITA WATER DEPT. ** SUPPLIED BY C.O.W. INSTALLED BY CONTRACTOR

WATER METER SUMMARY				
BL Station	Lt./Rt.	Service (Long or Short)	Address	As Built
1+65	Rt.	Long	1301 E. AMSDEN	
2+44	Rt.	Long	1307 E. AMSDEN	
2+47	Lt.	Short	1308 E. AMSDEN	
3+05	Rt.	Long	1315 E. AMSDEN	
3+22	Lt.	Short	1314 E. AMSDEN	
3+70	Lt.	Short	1320 E. AMSDEN	

WATER METER SUMMARY				
BL Station	Lt./Rt.	Service (Long or Short)	Address	As Built
3+85	Rt.	Long	1321 E. AMSDEN	
4+30	Rt.	Long	1327 E. AMSDEN	
4+36	Lt.	Short	1326 E. AMSDEN	
5+06	Lt.	Short	1402 E. AMSDEN	
5+19	Rt.	Long	1401 E. AMSDEN	
5+71	Rt.	Long	1409 E. AMSDEN	

WATER METER SUMMARY				
BL Station	Lt./Rt.	Service (Long or Short)	Address	As Built
5+73	Lt.	Short	1408 E. AMSDEN	
6+40	Rt.	Long	1419 E. AMSDEN	
6+43	Lt.	Short	1420 E. AMSDEN	

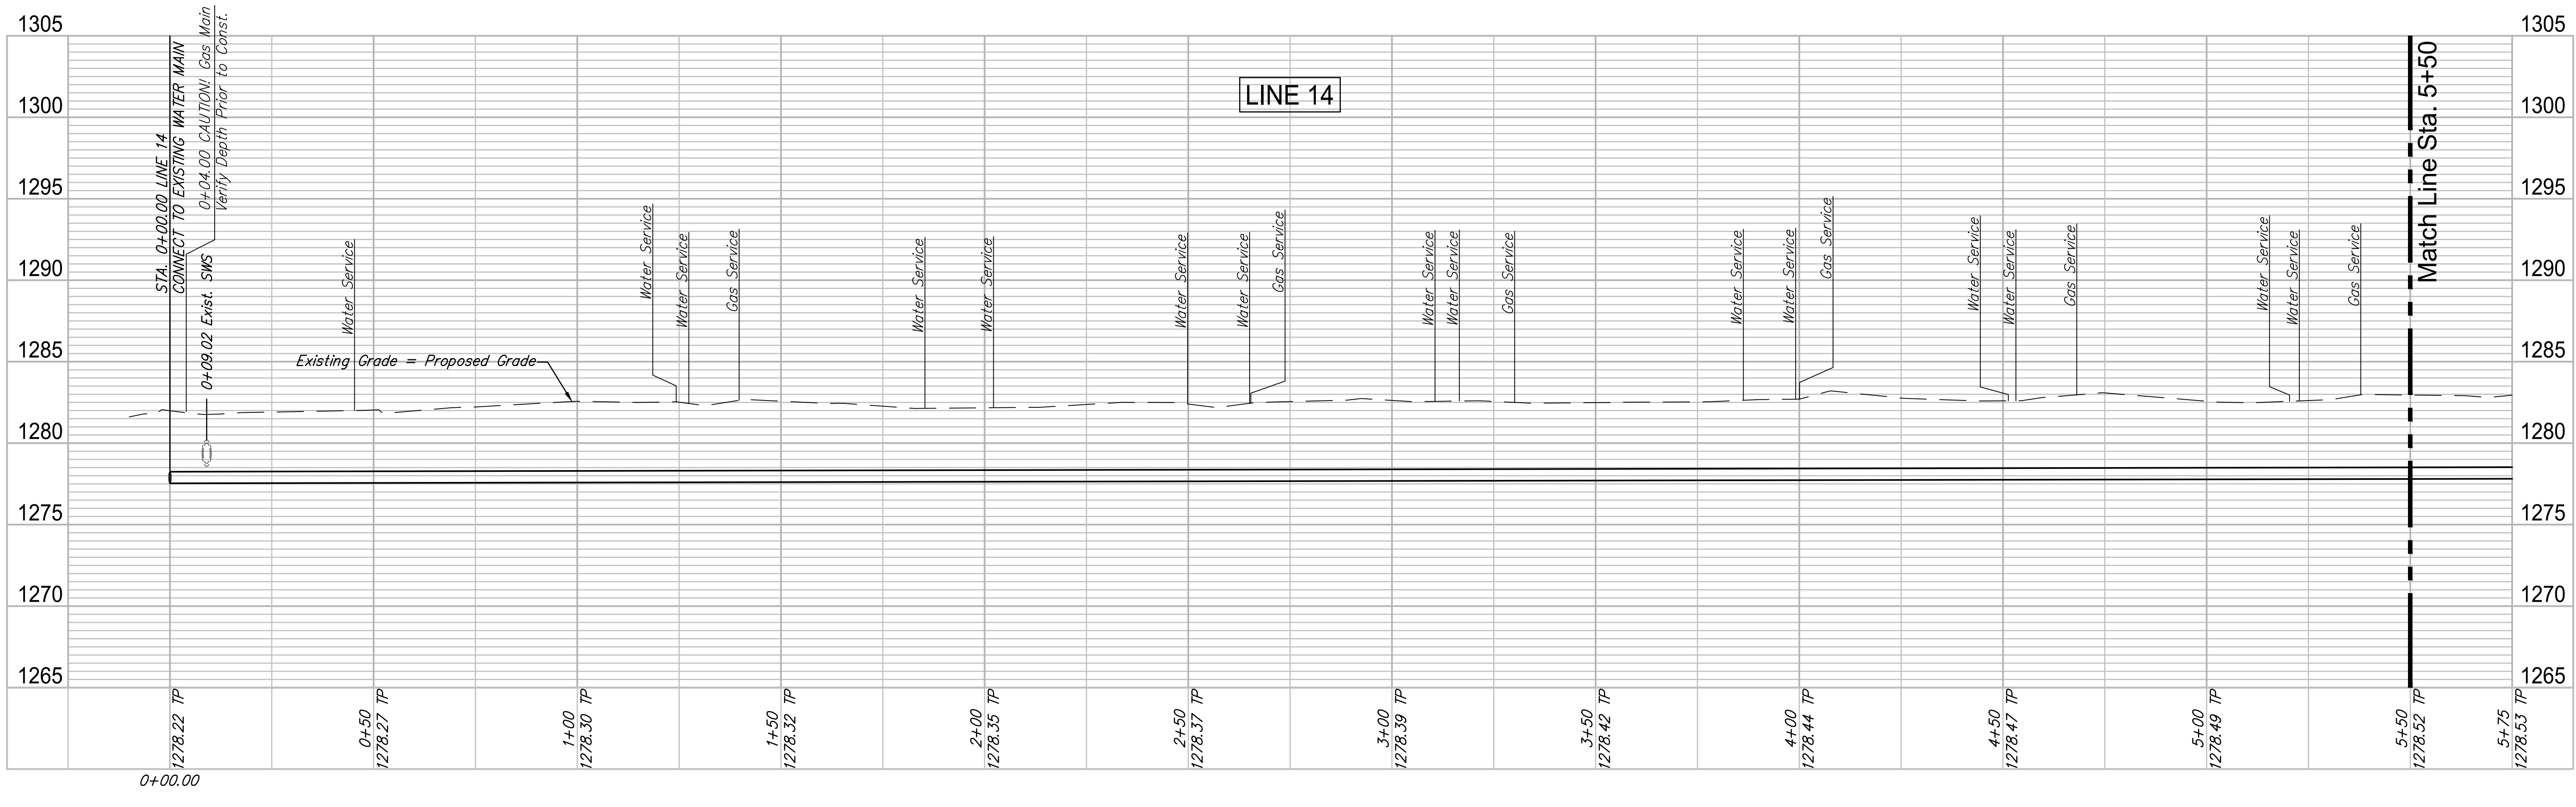

REVIEW 12-7-16 DATE 4/20/18

DESIGN CMB / RA DRAWN DRS / RA

PROJECT NUMBER 448-30721 DRAWING FILE LINE 14 - Amnden

ROSE MARIE WATER - Part A
AMSDEN - LINE 14 (1 of 2)
Wichita, Kansas

GARVER 4701 W 43 OF 57

© Copyright 2018, Garver