
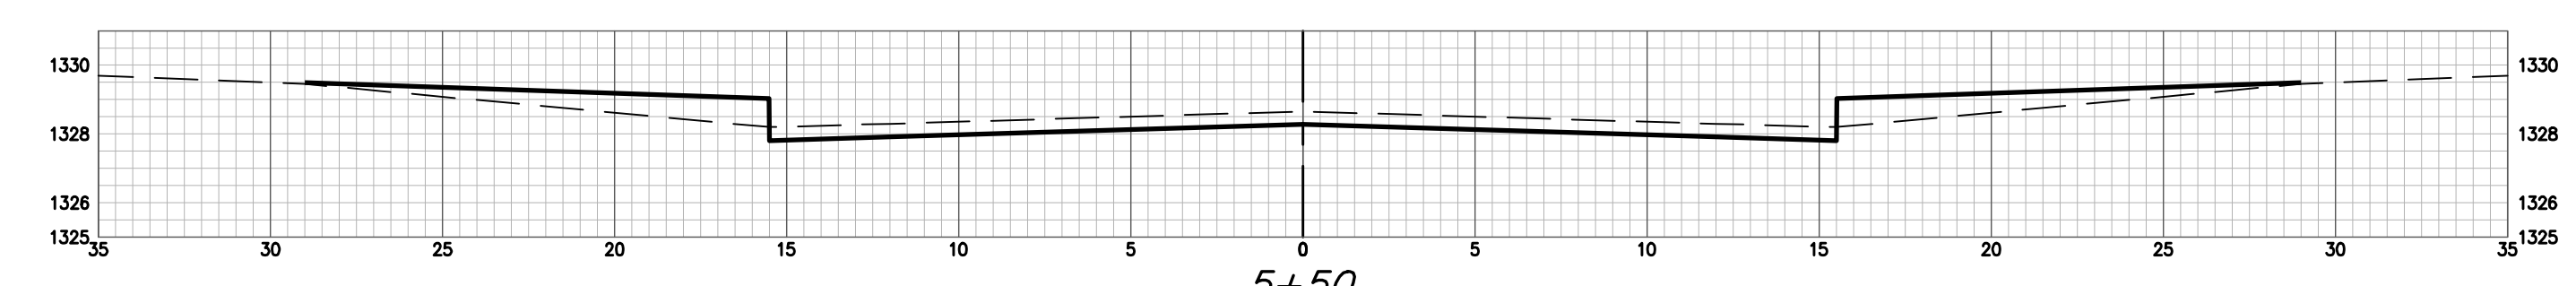
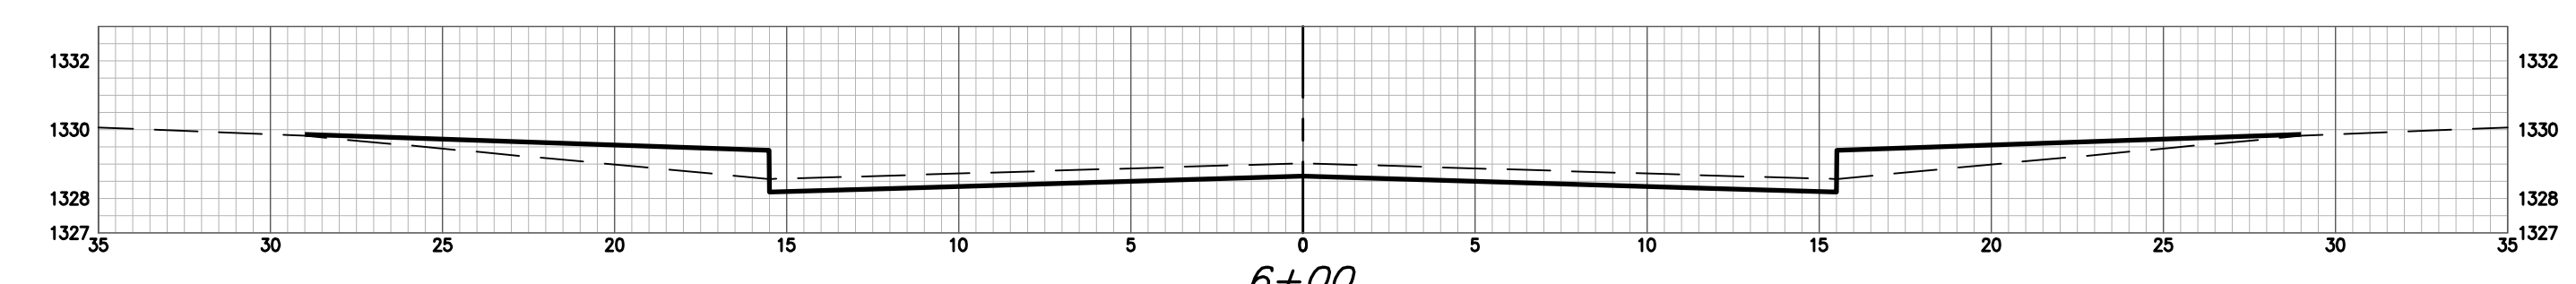
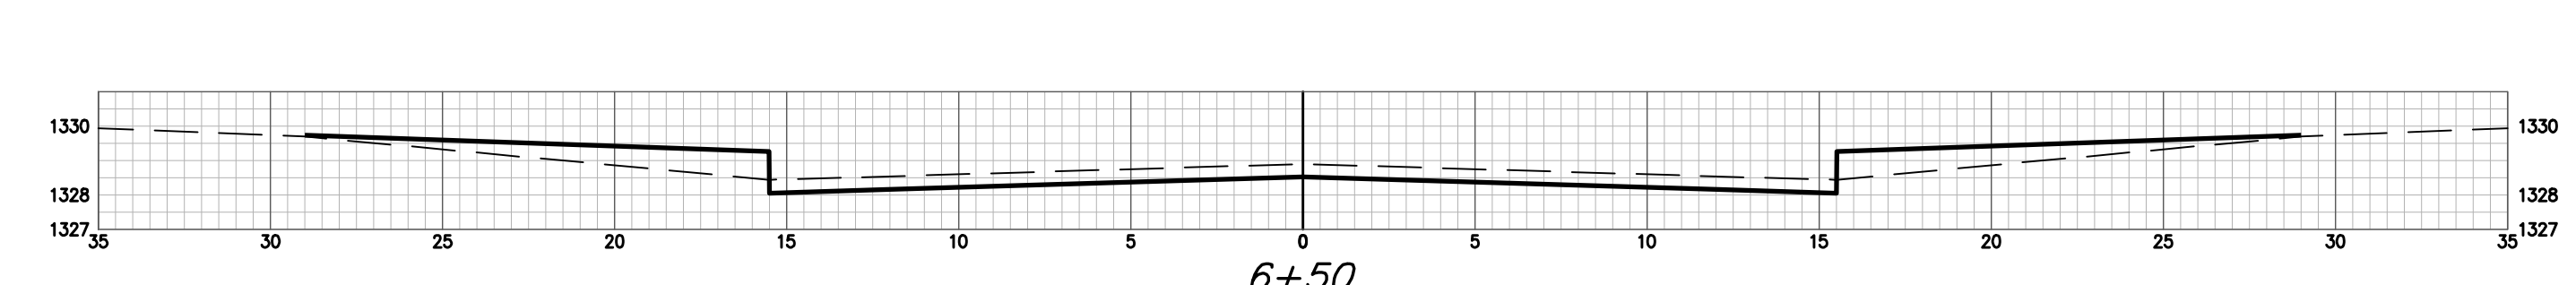
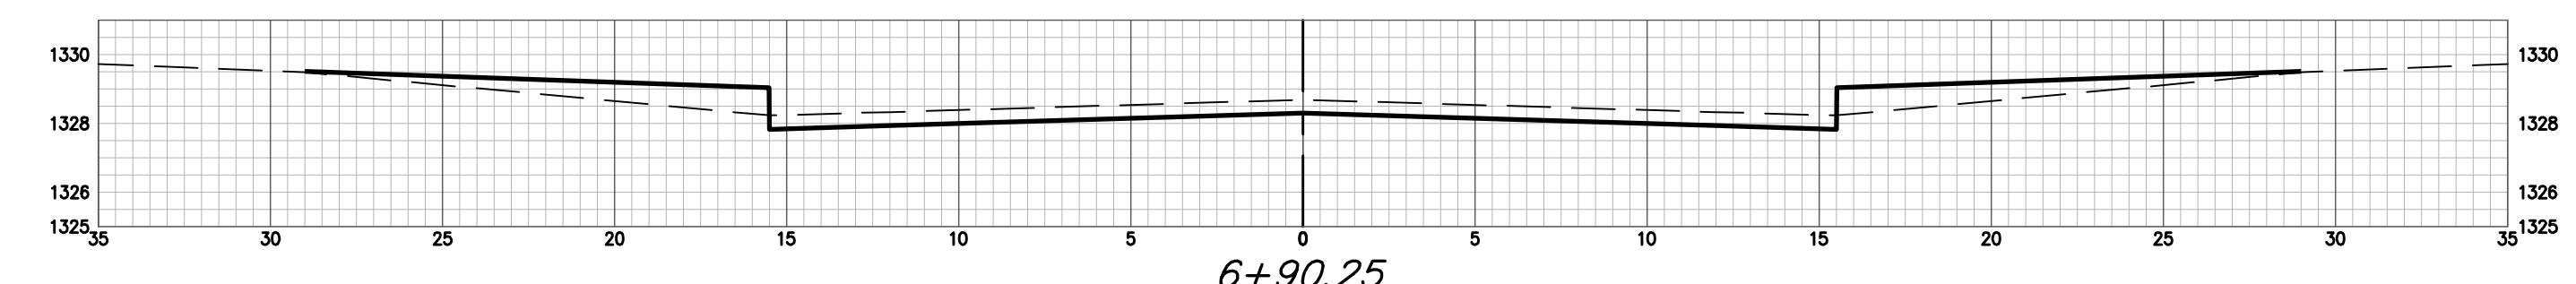
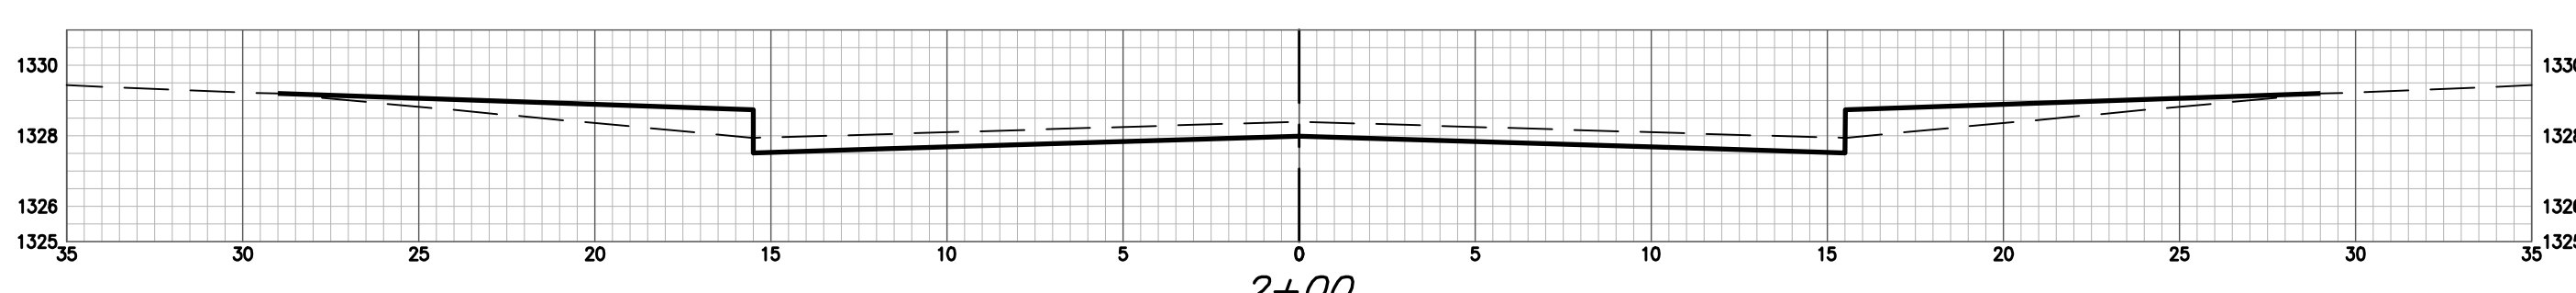
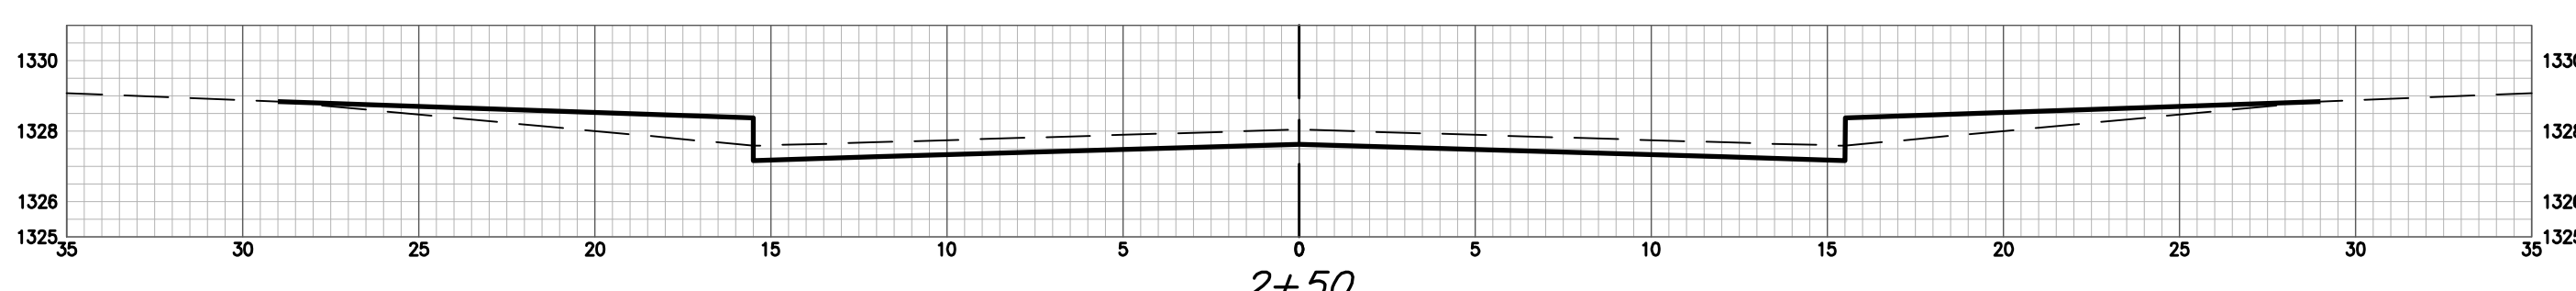
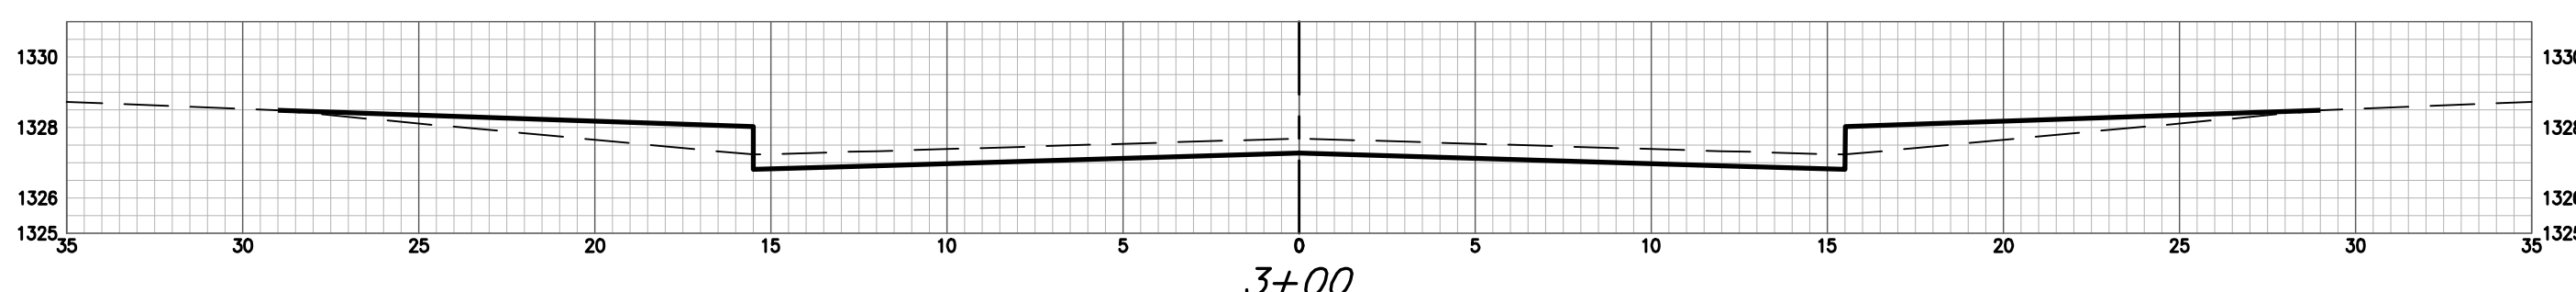
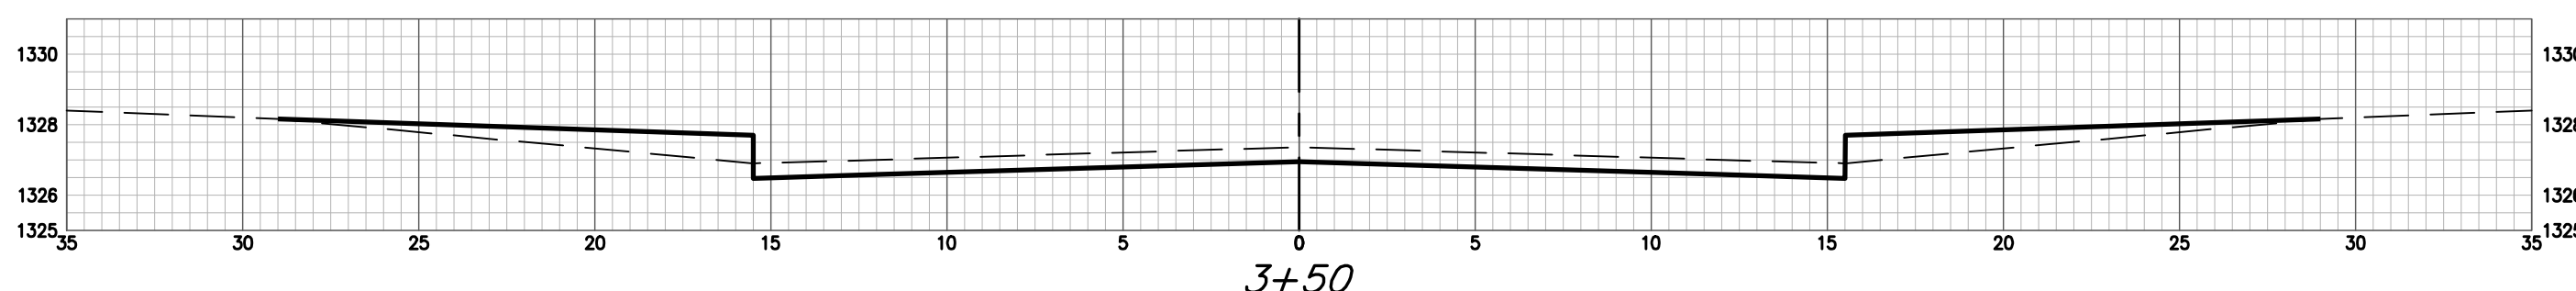
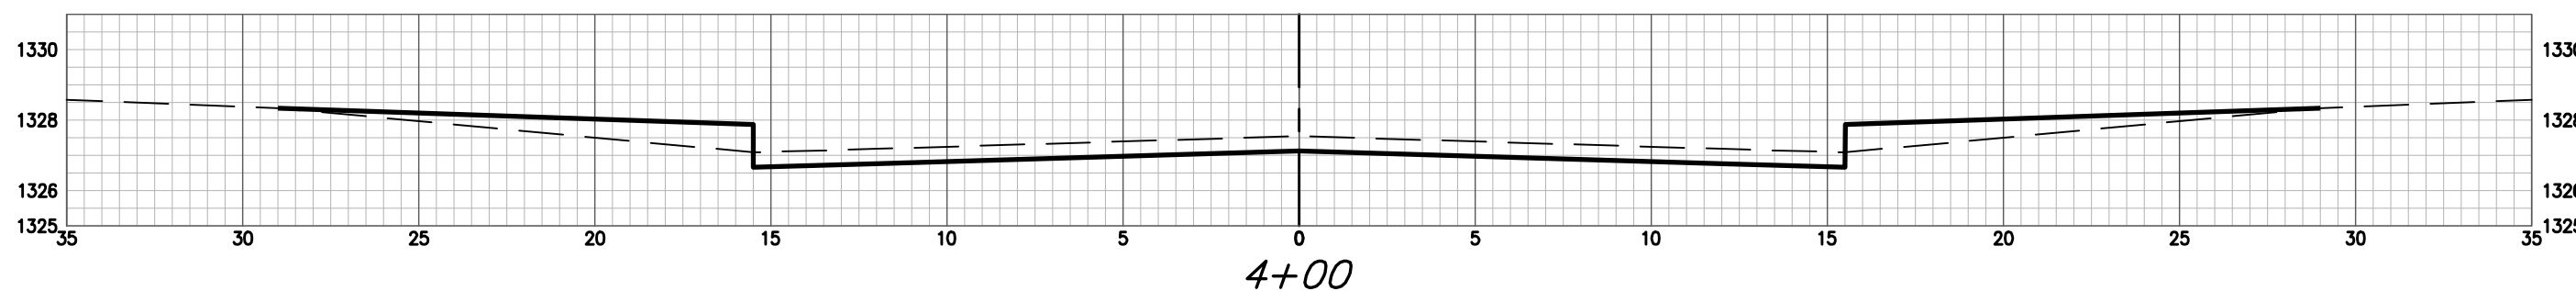
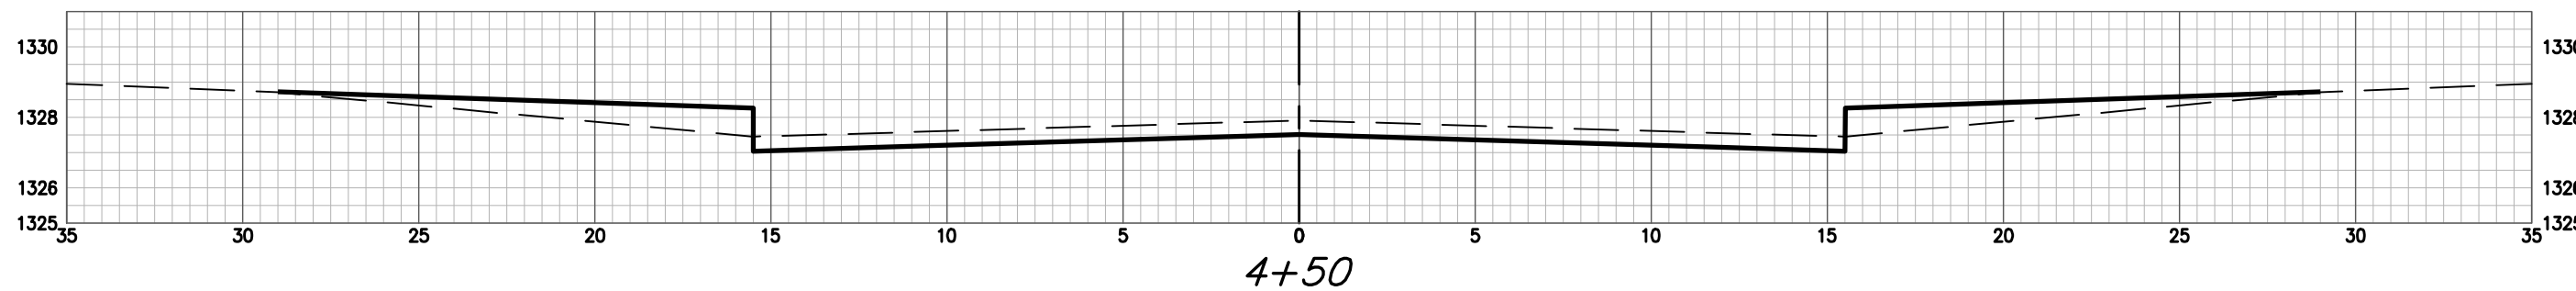


ANNA CT (LOTS 28-45) CY Excavation (unadjusted)				ANNA CT (LOTS 28-45) CY Loose Fill (unadjusted)			
Station	Area	Volume	Total	Station	Area	Volume	Total
-0+50	0.00	0.00	0.00	-0+50	0.00	0.00	0.00
-0+35	8.55	2.38	2.38	-0+35	22.00	6.11	6.11
-0+15	24.09	12.09	14.46	-0+15	10.87	12.17	18.29
-0+00	27.28	14.27	28.73	-0+00	9.56	5.67	23.96
0+24.99	22.16	22.88	51.62	0+24.99	12.68	10.30	34.26
0+49.99	12.96	16.26	67.87	0+49.99	10.62	10.79	45.04
1+00	12.94	23.98	91.86	1+00	10.64	19.69	64.73
1+50	12.91	23.93	115.79	1+50	10.67	19.73	84.46
2+00	12.88	23.88	139.67	2+00	10.69	19.77	104.24
2+50	12.85	23.83	163.50	2+50	10.71	19.82	124.05
3+00	12.83	23.78	187.27	3+00	10.74	19.86	143.91
3+50	12.87	23.80	211.07	3+50	10.70	19.85	163.76
4+00	12.88	23.84	234.91	4+00	10.69	19.81	183.56
4+50	12.53	23.52	258.43	4+50	11.00	20.08	203.65
5+00	12.18	22.88	281.31	5+00	11.30	20.65	224.29
5+50	11.83	22.23	303.54	5+50	11.60	21.21	245.50
6+00	11.55	21.65	325.19	6+00	11.84	21.71	267.21
6+50	11.84	21.66	346.86	6+50	11.59	21.70	288.92
6+90.25	12.28	17.98	364.84	6+90.25	11.22	17.00	305.92

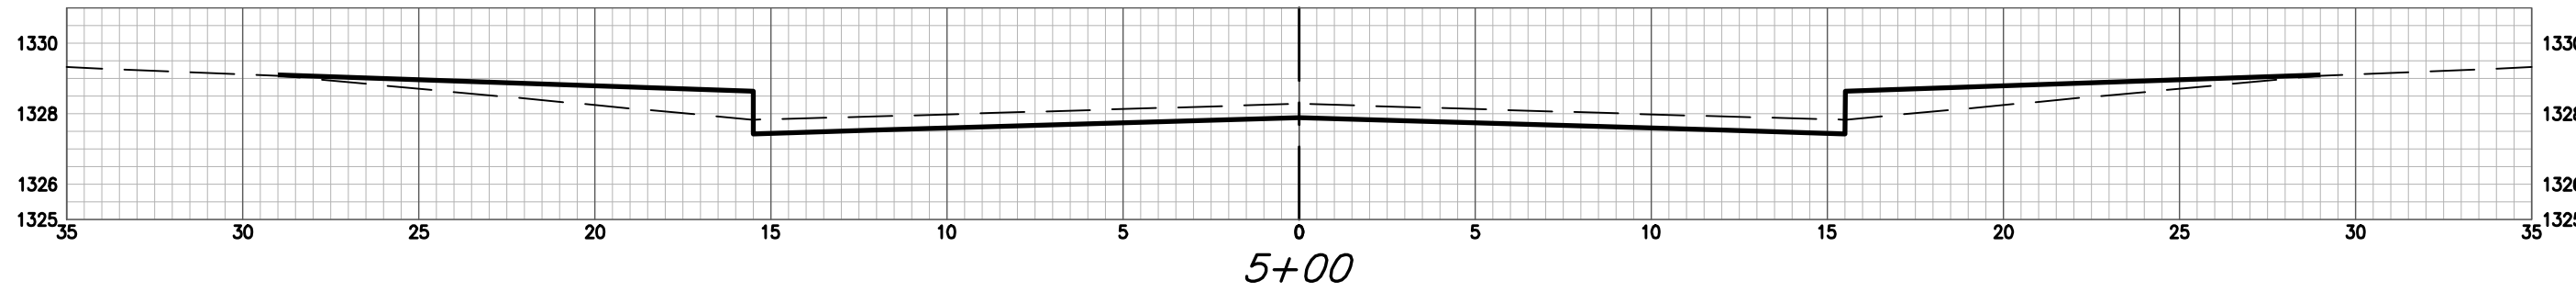

ANNA CT