
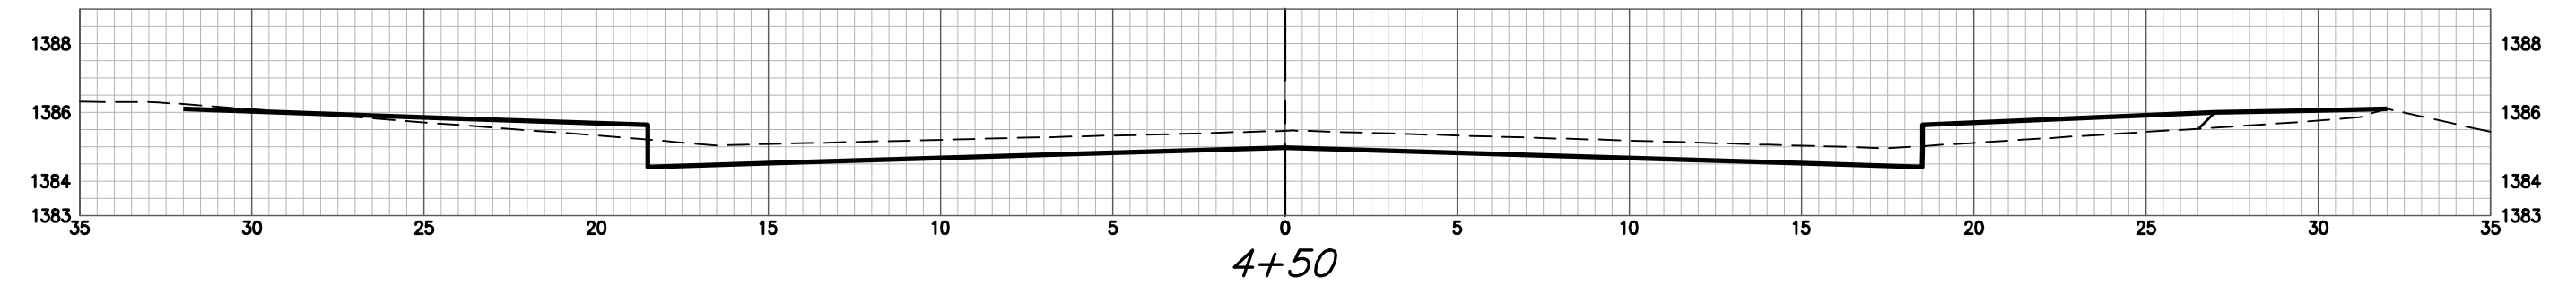
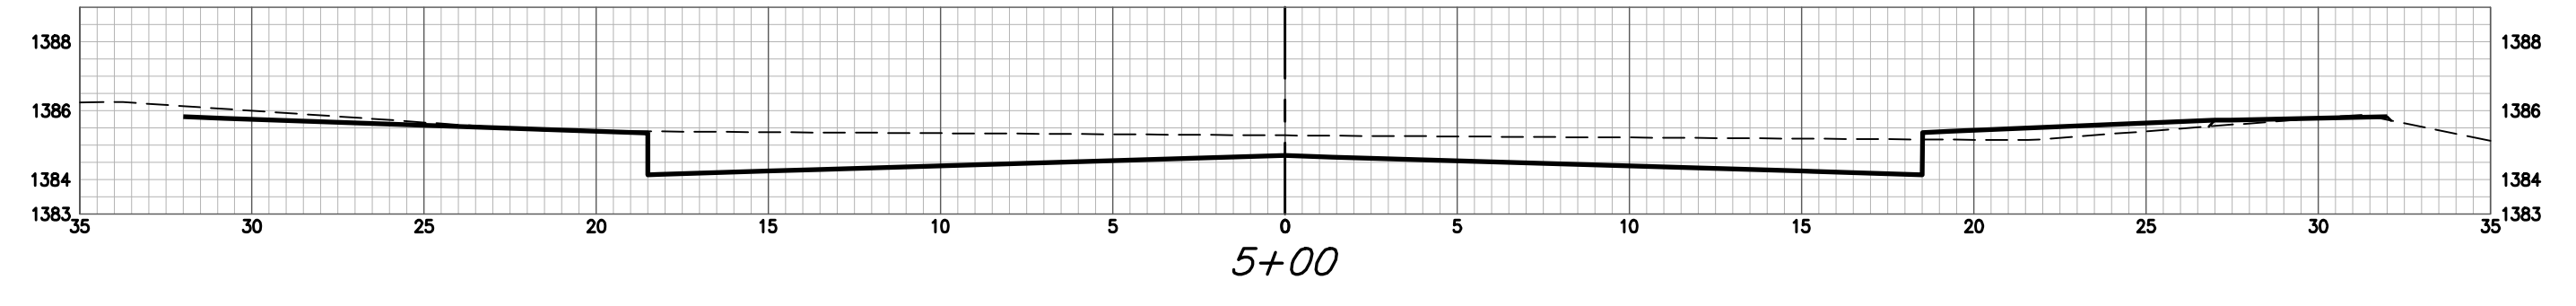
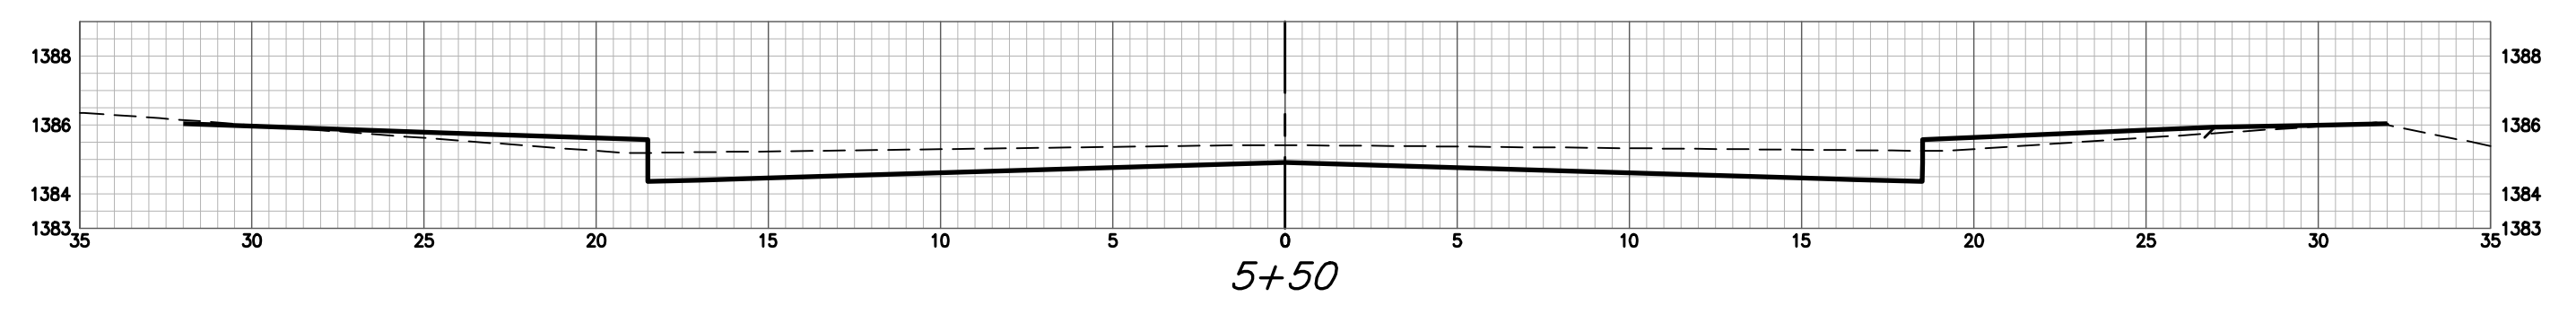


33RD ST S CY Excavation (unadjusted)				33RD ST S CY Compacted Fill (unadjusted)				33RD ST S CY Loose Fill (unadjusted)			
Station	Area	Volume	Total	Station	Area	Volume	Total	Station	Area	Volume	Total
0+17.76	35.13	0.00	0.00	0+17.76	0.00	0.00	0.00	0+17.76	5.09	0.00	0.00
0+50	24.66	35.70	35.70	0+50	0.57	0.34	0.34	0+50	4.52	5.73	5.73
1+00	15.54	37.23	72.92	1+00	2.13	2.51	2.85	1+00	10.66	14.06	19.79
1+50	12.28	25.76	98.69	1+50	2.00	3.83	6.68	1+50	11.68	20.69	40.48
2+00	10.78	21.35	120.03	2+00	2.67	4.33	11.01	2+00	11.99	21.92	62.39
2+50	14.62	23.51	143.54	2+50	1.16	3.54	14.55	2+50	9.49	19.89	82.28
3+00	15.88	28.24	171.78	3+00	1.04	2.03	16.58	3+00	8.91	17.04	99.32
3+50	16.64	30.11	201.90	3+50	1.36	2.22	18.80	3+50	7.17	14.89	114.21
4+00	16.55	30.73	232.63	4+00	1.30	2.46	21.26	4+00	7.40	13.49	127.70
4+50	19.65	33.52	266.14	4+50	1.61	2.70	23.96	4+50	6.48	12.86	140.56
5+00	33.53	49.24	315.38	5+00	0.28	1.76	25.72	5+00	2.27	8.11	148.67
5+50	25.57	54.72	370.10	5+50	0.36	0.59	26.31	5+50	4.63	6.40	155.07
5+89.76	15.46	30.21	400.31	5+89.76	0.98	0.98	27.29	5+89.76	10.14	10.88	165.95

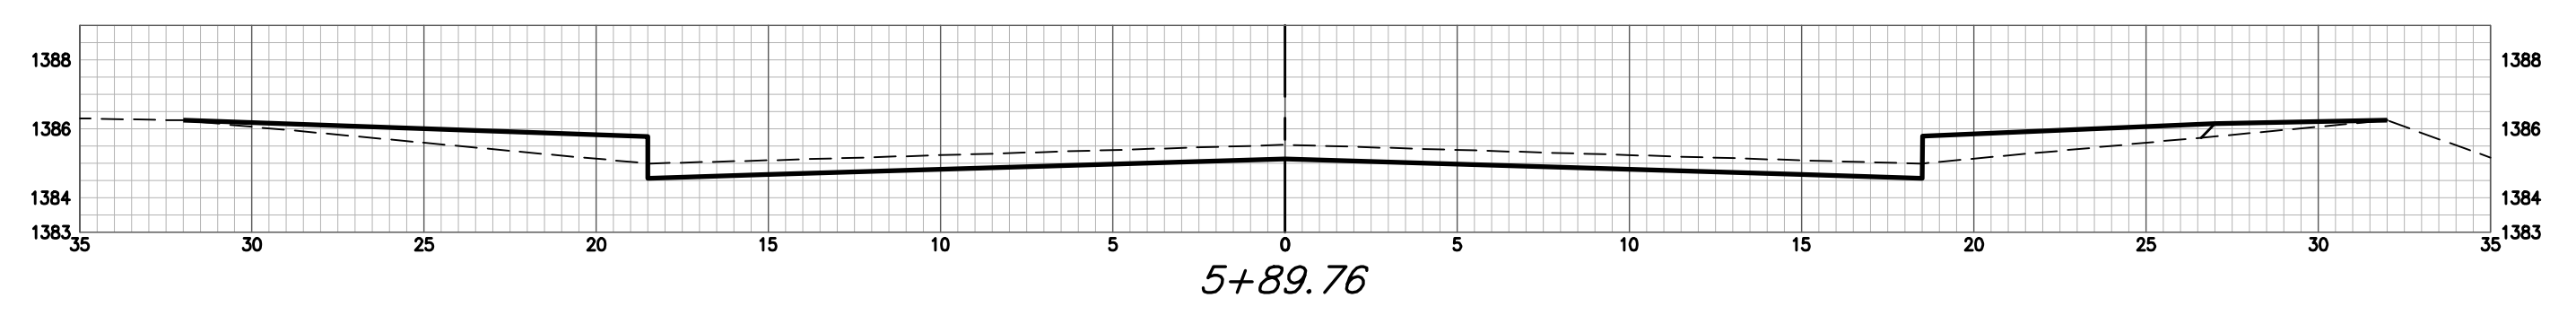

33RD ST SOUTH