
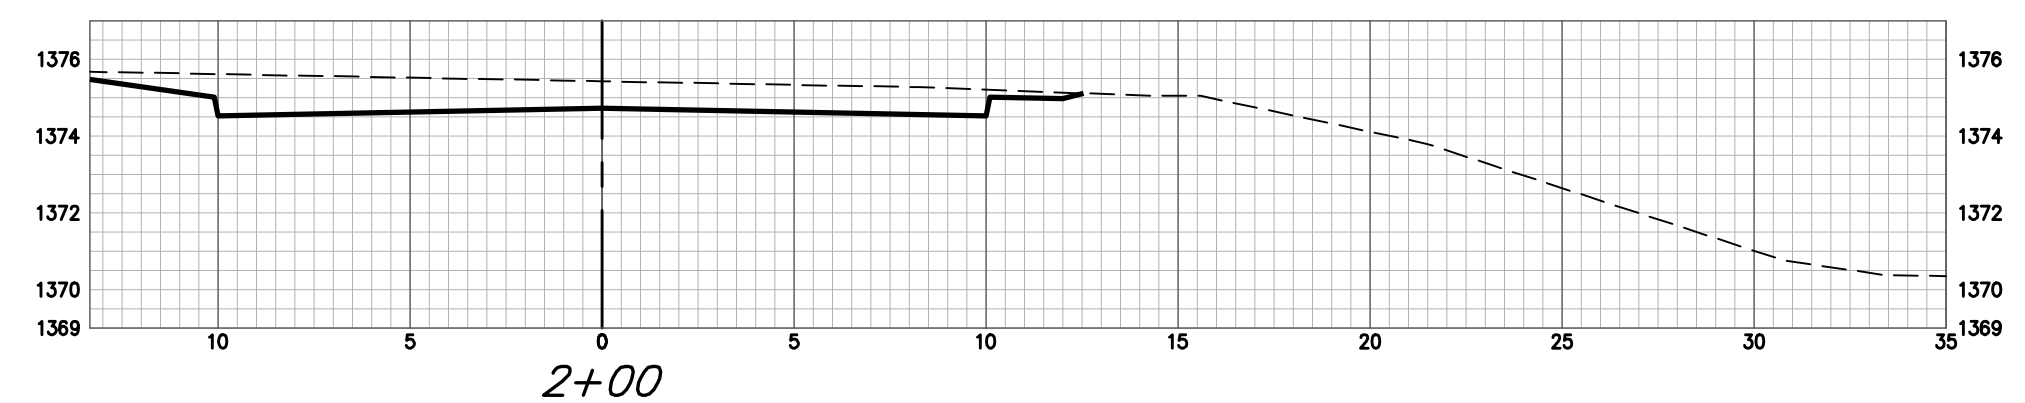


E.A. Drive CY Excavation (unadjusted)				E.A. Drive CY Compacted Fill (unadjusted)				E.A. Drive CY Loose Fill (unadjusted)			
Station	Area	Volume	Total	Station	Area	Volume	Total	Station	Area	Volume	Total
0+00	11.83	0.00	0.00	0+00	0.00	0.00	0.00	0+00	18.15	0.00	0.00
0+50	18.66	28.23	28.23	0+50	8.30	7.69	7.69	0+50	5.98	22.34	22.34
1+00	38.05	52.51	80.73	1+00	3.07	10.53	18.22	1+00	21.00	24.98	47.32
1+50	39.65	71.95	152.69	1+50	0.00	2.84	21.06	1+50	0.50	19.90	67.22
1+88.65	38.34	55.82	208.51	1+88.65	0.00	0.00	21.06	1+88.65	0.54	0.75	67.97
1+95.71	26.58	8.48	216.99	1+95.71	0.00	0.00	21.06	1+95.71	0.00	0.07	68.04
2+00	17.88	3.53	220.53	2+00	0.00	0.00	21.06	2+00	0.00	0.00	68.04
2+08.59	0.00	2.85	223.37	2+08.59	0.00	0.00	21.06	2+08.59	0.00	0.00	68.04

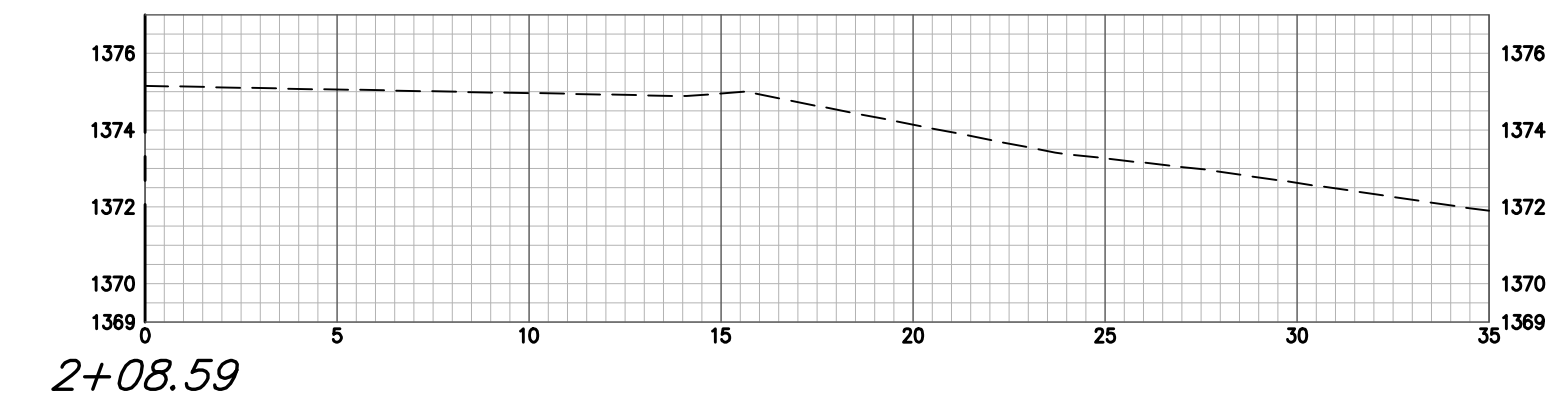

EMERGENCY ACCESS DRIVE