


J:\PROJECTS\2018\1601010221_PERFECTION_AUBURN_LAKES_16221 CAD\SHOTS\05 CIVIL\PAV\PHASE 2\16221-05-5000-PH2.DWG
 PLOTTED: Tuesday, July 30, 2019 @ 11:25AM

SUBDIVISION BENCH MARKS				
NO.	STREET AND STATION	FROM CL	DESCRIPTION	ELEVATIONS
1	MONTECITO, STA. 22+94.34	14.5' RT.	TOP OF CURB AT EXISTING FIRE HYDRANT	

NOTE: CONTRACTOR SHALL INSTALL SUBDIVISION BENCH MARKS ("FLAT SURVEY MARKERS NO. 8134-08 3" TOP DIAMETER" PROVIDED BY KANSAS BLUE PRINT CO., INC.) COSTS TO BE CONSIDERED SUBSIDIARY TO CONSTRUCTION OF COMBINED CURB AND GUTTER.

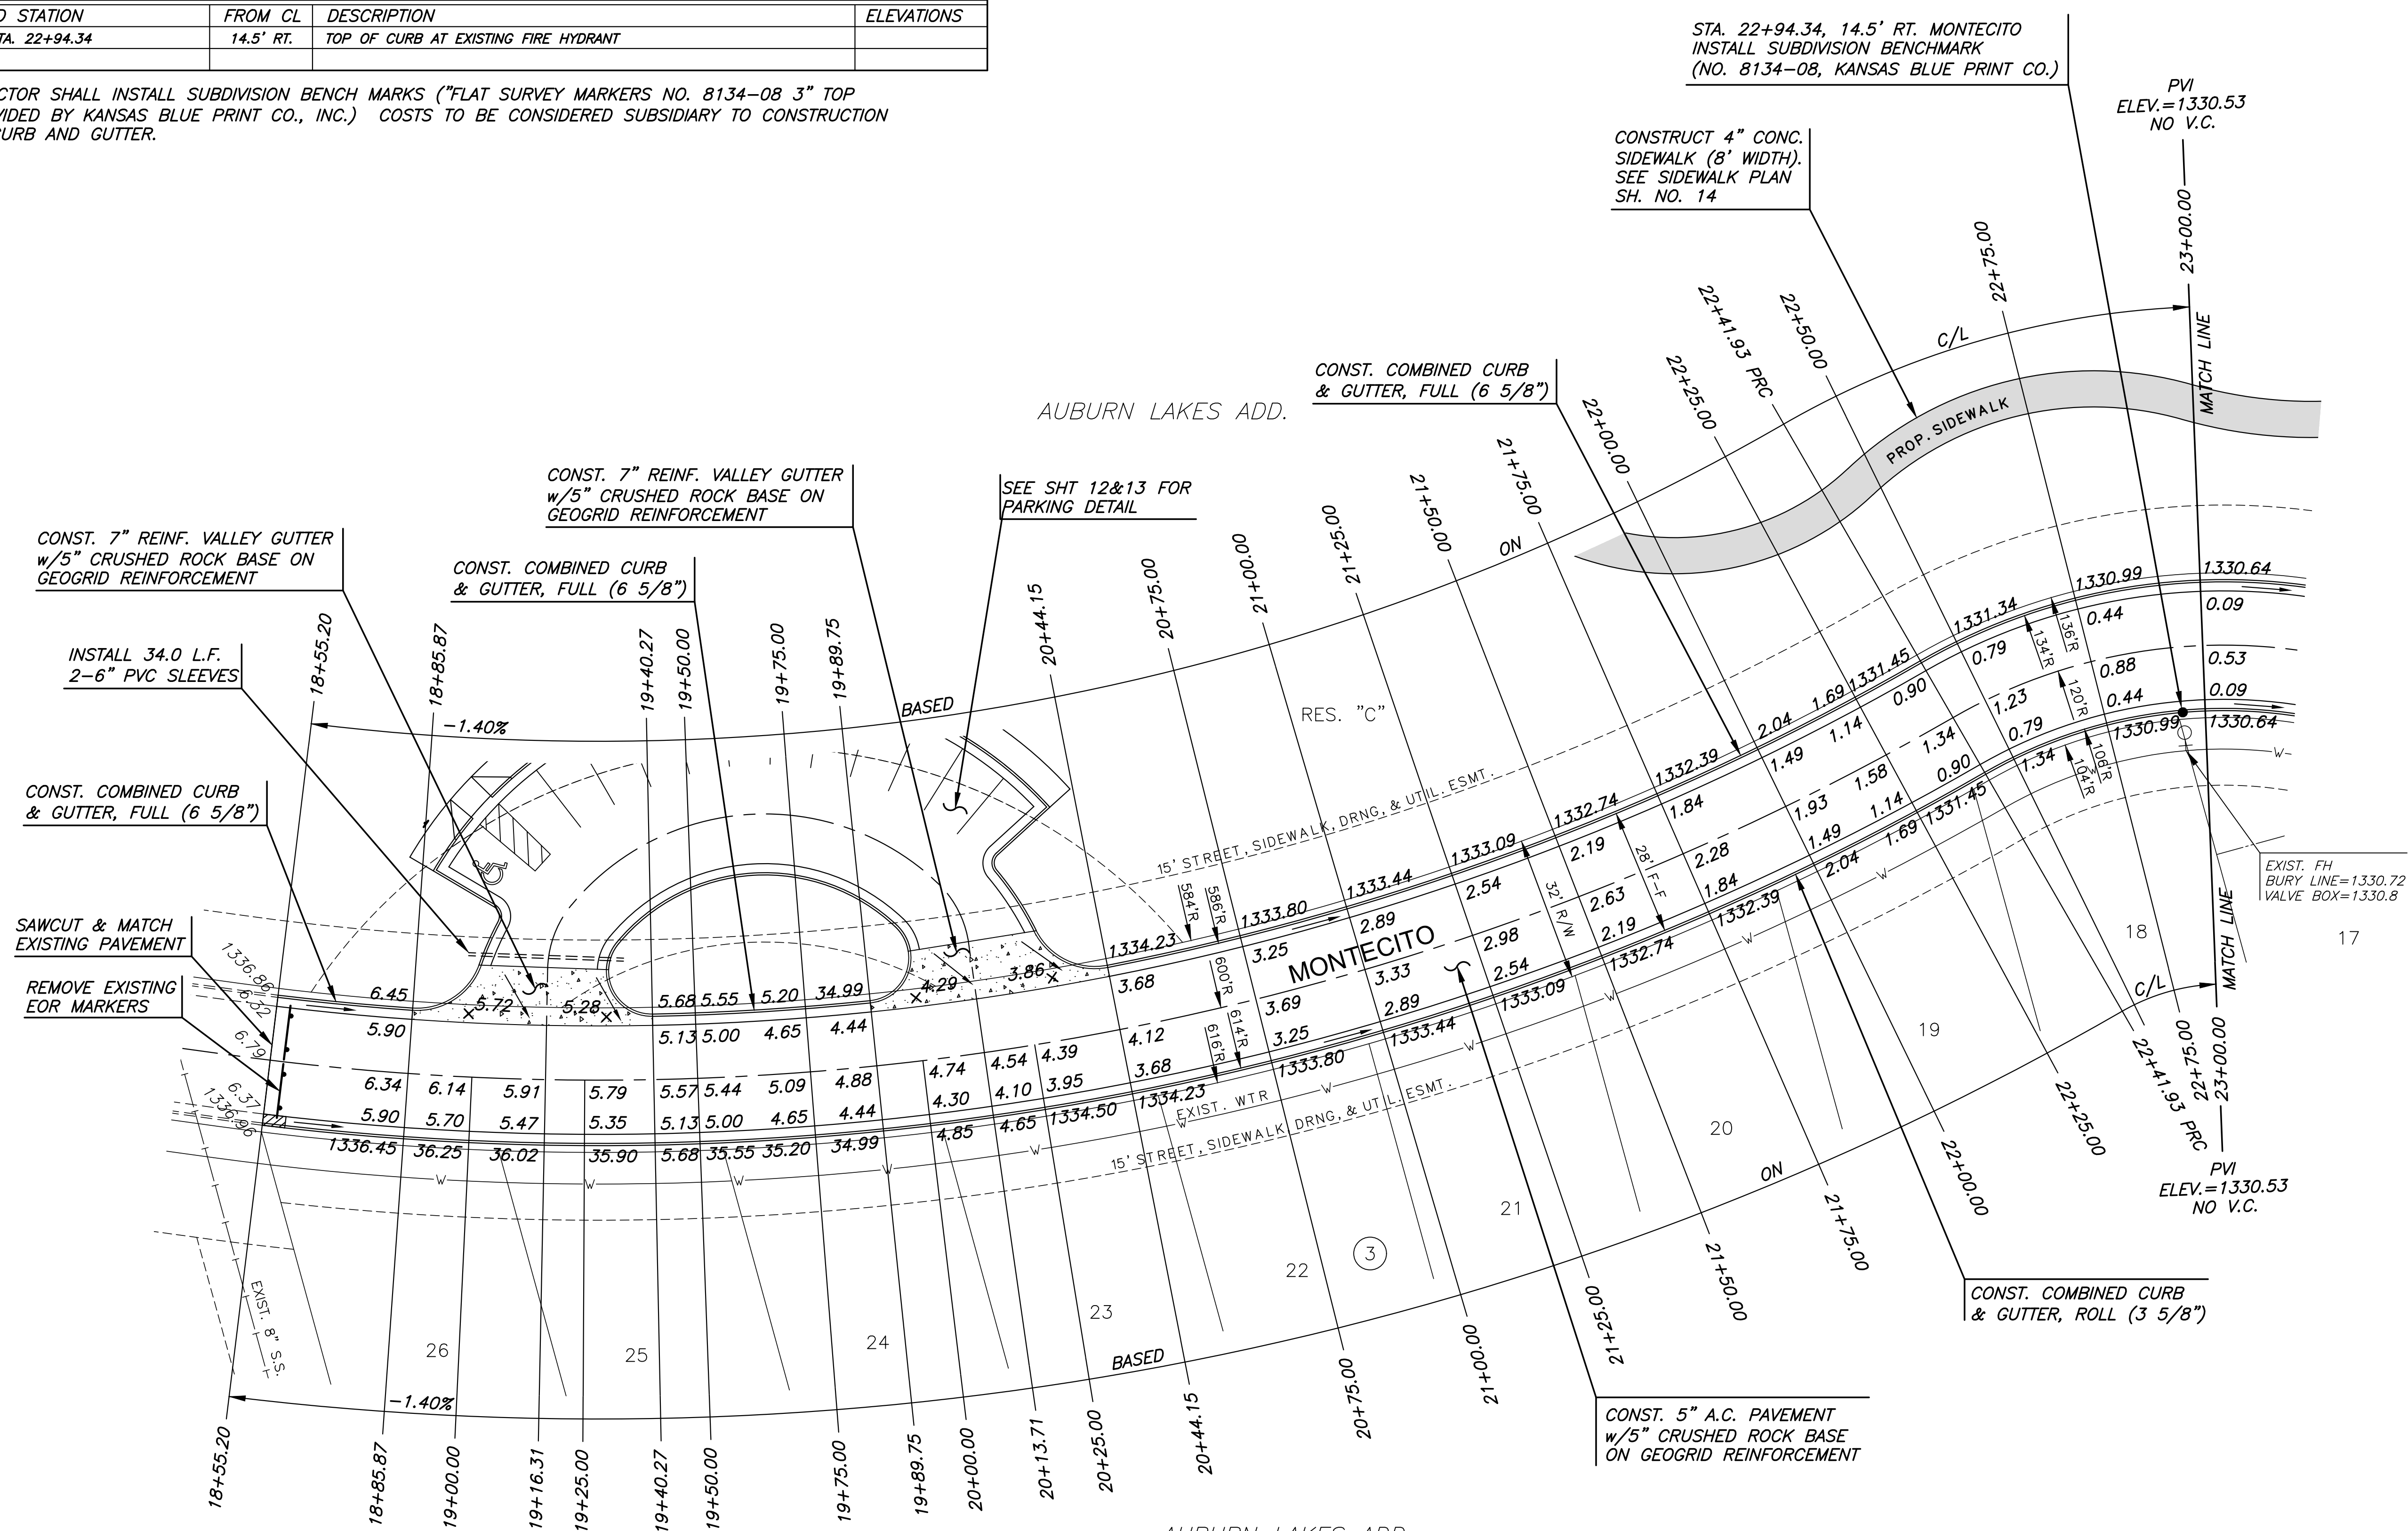

STA. 22+94.34, 14.5' RT. MONTECITO
 INSTALL SUBDIVISION BENCHMARK
 (NO. 8134-08, KANSAS BLUE PRINT CO.)

PVI
 ELEV.=1330.53
 NO V.C.

CONSTRUCT 4" CONC.
 SIDEWALK (8' WIDTH).
 SEE SIDEWALK PLAN
 SH. NO. 14

CONST. COMBINED CURB
 & GUTTER, FULL (6 5/8")

CONST. 7" REINF. VALLEY GUTTER
 w/5" CRUSHED ROCK BASE ON
 GEOGRID REINFORCEMENT

CONST. 7" REINF. VALLEY GUTTER
 w/5" CRUSHED ROCK BASE ON
 GEOGRID REINFORCEMENT

INSTALL 34.0 L.F.
 2-6" PVC SLEEVES

CONST. COMBINED CURB
 & GUTTER, FULL (6 5/8")

SAWCUT & MATCH
 EXISTING PAVEMENT

REMOVE EXISTING
 EOR MARKERS

SEE SHIT 12&13 FOR
 PARKING DETAIL

EXIST. FH
 BURY LINE=1330.72
 VALVE BOX=1330.8

CONST. COMBINED CURB
 & GUTTER, ROLL (3 5/8")


CONST. 5" A.C. PAVEMENT
 w/5" CRUSHED ROCK BASE
 ON GEOGRID REINFORCEMENT

NOTES:

- TOP OF CURB ELEVATIONS SHOWN ARE FOR FULL CURB. CONSTRUCT CURB AND GUTTER AS NOTED.
- PVC SLEEVES TO BE BURIED AT A DEPTH OF 3' TO TOP OF SLEEVE, MINIMUM.

LEGEND

- STREET SIGN & SIGN LOCATION (SEE SIGN ASSEMBLY TABLE FOR TYPE & STATION OF SIGN)
- 5' TRANSITION FROM FULL TO ROLL CURB

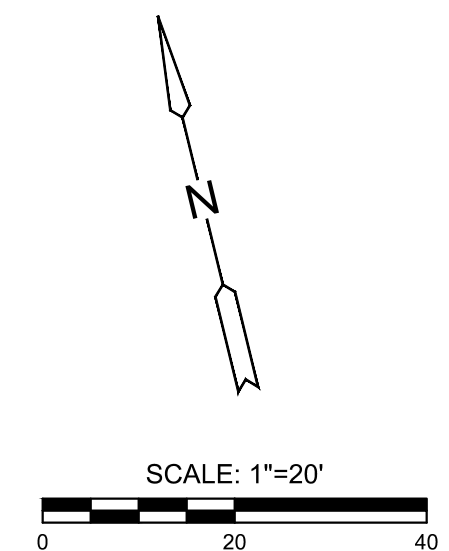

PAVING & INCIDENTAL DRAINAGE FOR
AUBURN LAKES ADDITION
 PHASE 2

©2019
 MKEC Engineering
 All Rights Reserved
 www.mkec.com
 These drawings and their contents, including, but not limited to, all concepts, designs, & ideas are the exclusive property of MKEC Engineering (MKEC), and may not be used or reproduced in any way without the express consent of MKEC.

MONTECITO

PROJECT NO.	472-85328	
DATE	JULY 2019	
SCALE	1" = 20'	
DESIGNED	DRAWN	CHECKED
DFL	JWC	GJA

NO.	REVISION	DATE

SHEET NO.
 08 OF 38