
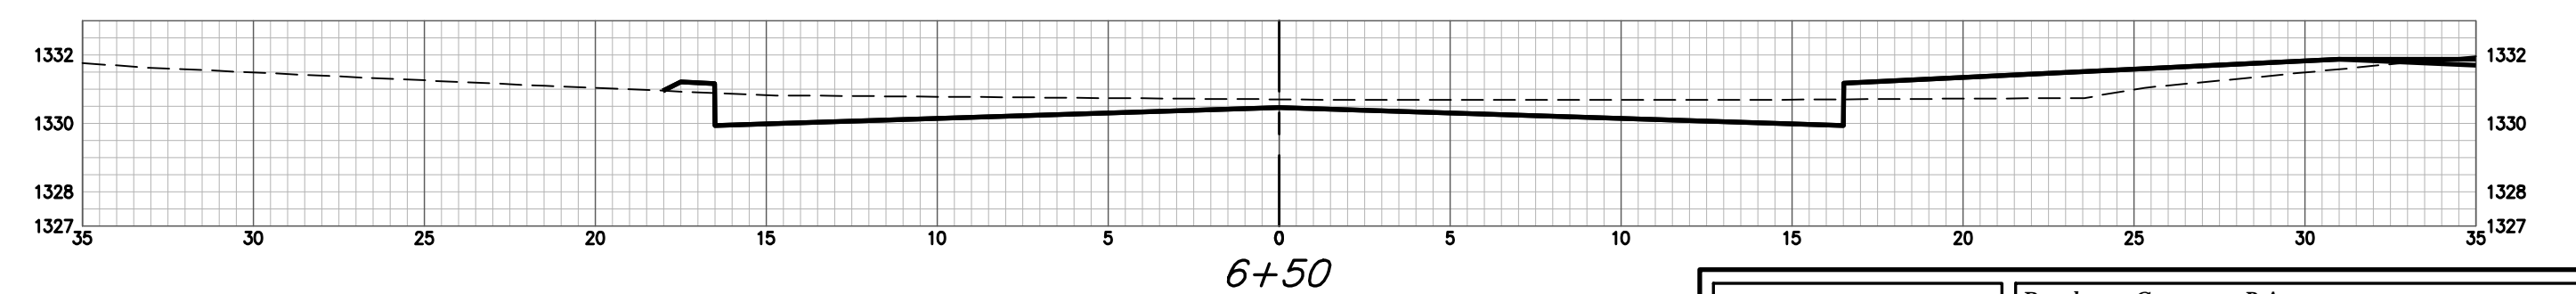


Lakeway Ct Hammerhead CY Excavation (unadjusted)				Lakeway Ct Hammerhead CY Compacted Fill (unadjusted)				Lakeway Ct Hammerhead CY Loose Fill (unadjusted)			
Station	Area	Volume	Total	Station	Area	Volume	Total	Station	Area	Volume	Total
0+15	0.00	0.00	0.00	0+15	0.00	0.00	0.00	0+15	0.00	0.00	0.00
0+19	0.00	0.00	0.00	0+19	18.47	1.37	1.37	0+19	38.37	2.84	2.84
0+40	0.00	0.00	0.00	0+40	20.19	15.03	16.40	0+40	41.48	31.05	33.90
0+75	0.00	0.00	0.00	0+75	38.91	38.30	54.71	0+75	27.16	44.49	78.39
1+10	0.00	0.00	0.00	1+10	24.48	41.09	95.79	1+10	41.06	44.22	122.61
1+31	0.00	0.00	0.00	1+31	20.20	17.37	113.17	1+31	39.92	31.49	154.10
1+35	0.00	0.00	0.00	1+35	0.00	1.50	114.66	1+35	0.00	2.96	157.06

Lakeway Ct CY Excavation (unadjusted)				Lakeway Ct CY Compacted Fill (unadjusted)				Lakeway Ct CY Loose Fill (unadjusted)			
Station	Area	Volume	Total	Station	Area	Volume	Total	Station	Area	Volume	Total
0+34	0.00	0.00	0.00	0+34	15.34	0.00	0.00	0+34	37.74	0.00	0.00
0+50	0.04	0.01	0.01	0+50	10.86	7.76	7.76	0+50	37.28	22.23	22.23
1+00	3.06	2.87	2.88	1+00	1.19	11.16	18.92	1+00	30.53	62.78	85.01
1+50	9.13	11.29	14.17	1+50	0.00	1.10	20.02	1+50	22.20	48.82	133.83
2+00	13.41	20.87	35.04	2+00	0.00	0.00	20.02	2+00	17.51	36.77	170.59
2+50	25.29	35.78	70.82	2+50	0.00	0.00	20.02	2+50	1.90	17.79	188.38
3+00	14.58	36.93	107.75	3+00	0.00	0.00	20.02	3+00	9.93	10.93	199.31
3+50	16.84	29.01	136.76	3+50	0.00	0.00	20.02	3+50	16.29	24.02	223.34
4+00	8.67	23.59	160.35	4+00	0.01	0.01	20.03	4+00	18.44	32.07	255.41
4+50	14.29	21.31	181.66	4+50	0.00	0.01	20.04	4+50	17.21	32.90	288.31
5+00	12.74	25.03	206.69	5+00	0.00	0.00	20.04	5+00	16.91	31.47	319.78
5+50	13.17	24.00	230.69	5+50	0.00	0.00	20.04	5+50	17.47	31.83	351.61
6+00	10.23	21.65	252.33	6+00	0.00	0.00	20.04	6+00	18.37	31.84	383.45
6+50	17.75	25.92	278.26	6+50	0.00	0.00	20.04	6+50	8.61	22.56	406.01
6+71.78	30.85	19.61	297.86	6+71.78	0.00	0.00	20.04	6+71.78	8.32	5.87	411.87

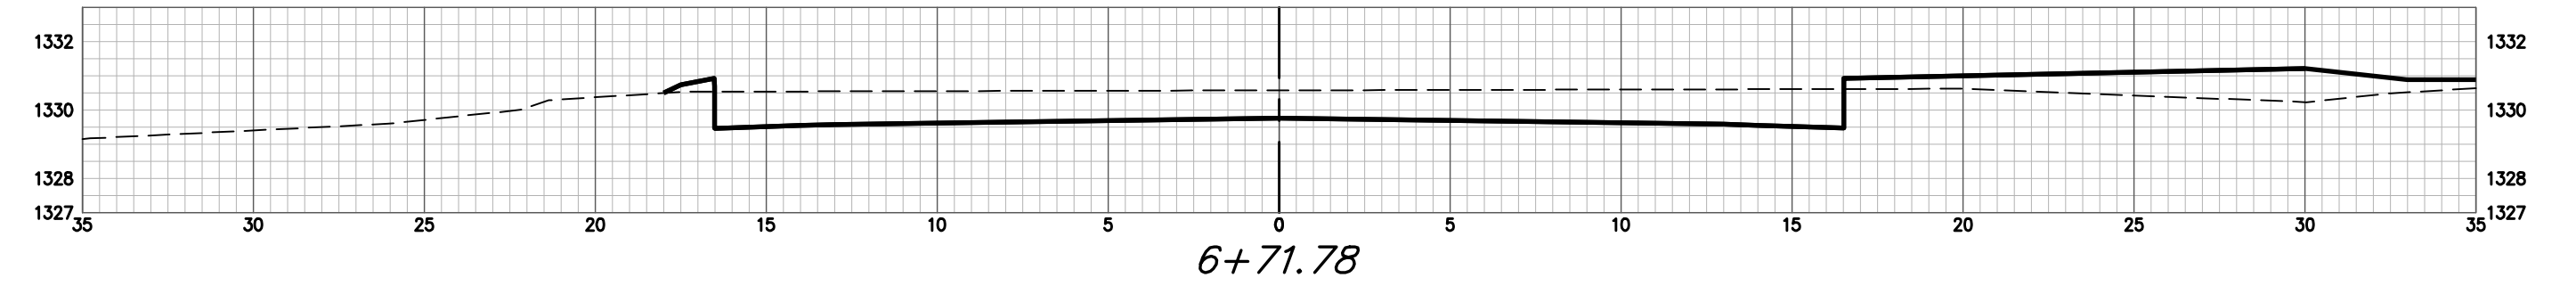

LAKeway CT