
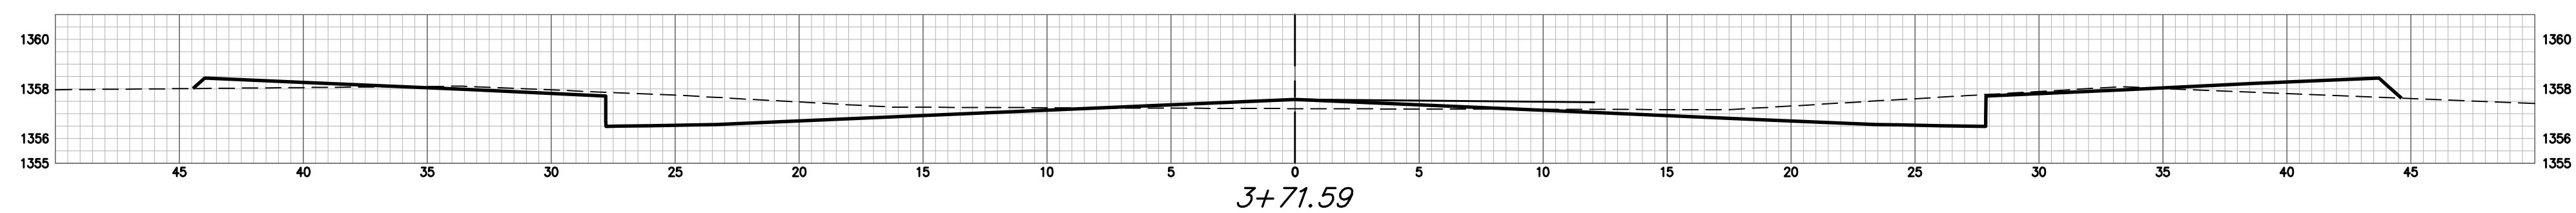
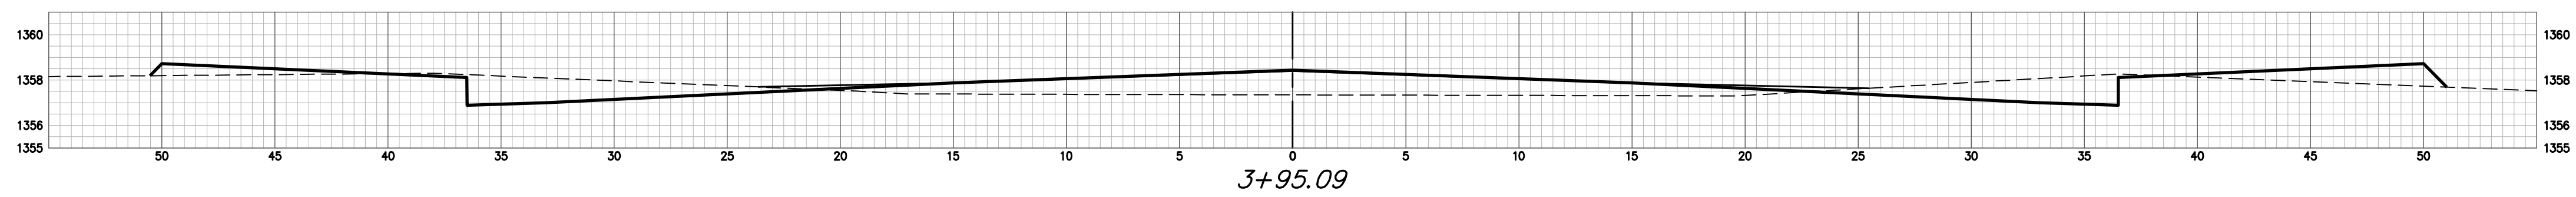
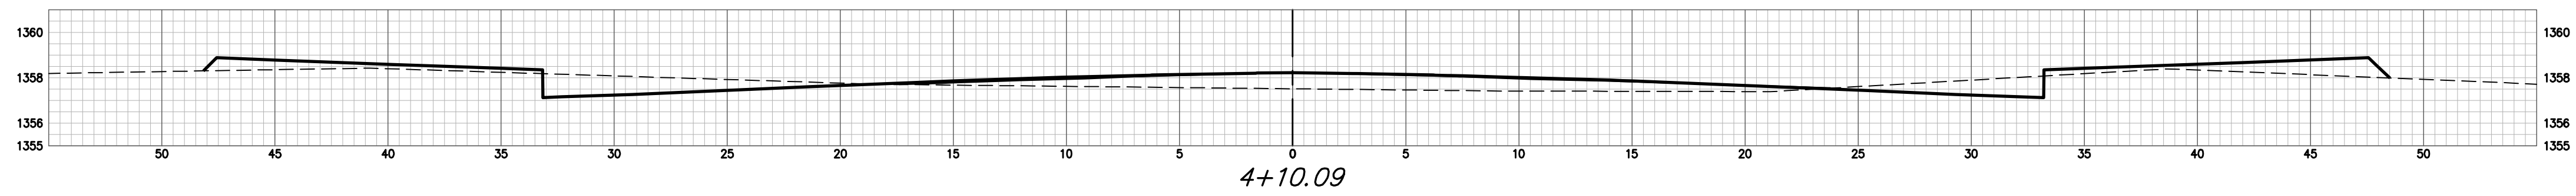
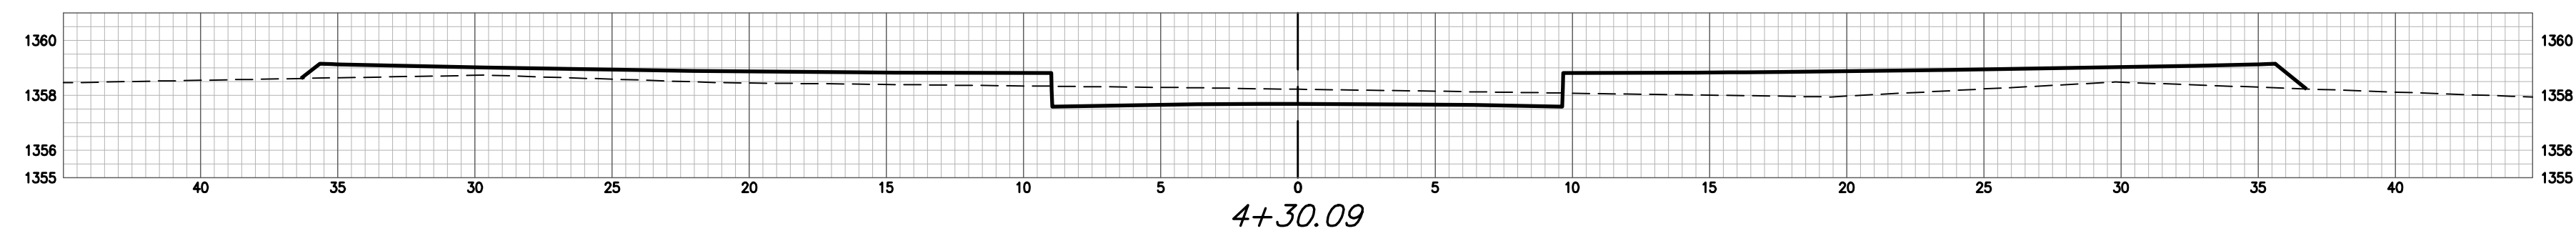


Thunder - Thunder Cir CY Excavation (unadjusted)				Thunder - Thunder Cir CY Compacted Fill (unadjusted)				Thunder - Thunder Cir CY Loose Fill (unadjusted)			
Station	Area	Volume	Total	Station	Area	Volume	Total	Station	Area	Volume	Total
1+26	31.95	0.00	0.00	1+26	0.00	0.00	0.00	1+26	0.68	0.00	0.00
1+50	26.79	26.10	26.10	1+50	0.27	0.12	0.12	1+50	2.99	1.63	1.63
2+07	46.61	77.48	103.58	2+07	3.57	4.06	4.18	2+07	4.86	8.28	9.91
2+44.04	81.22	87.68	191.26	2+44.04	0.00	2.45	6.63	2+44.04	0.00	3.33	13.24
2+81	54.70	93.04	284.30	2+81	0.00	0.00	6.63	2+81	1.22	0.83	14.08
3+00	51.14	37.24	321.53	3+00	0.00	0.00	6.63	3+00	0.00	0.43	14.50
3+50	22.99	68.64	390.17	3+50	0.00	0.00	6.63	3+50	1.50	1.39	15.89
3+71.59	24.29	18.90	409.07	3+71.59	4.03	1.61	8.24	3+71.59	7.08	3.43	19.32
3+95.09	21.03	19.73	428.80	3+95.09	30.04	14.83	23.07	3+95.09	9.37	7.16	26.49
4+10.09	12.58	9.34	438.14	4+10.09	17.89	13.31	36.39	4+10.09	11.70	5.85	32.34
4+30.09	10.47	8.54	446.67	4+30.09	0.00	6.63	43.01	4+30.09	31.02	15.82	48.16
4+45.09	0.00	2.91	449.58	4+45.09	0.00	0.00	43.01	4+45.09	7.45	10.69	58.85

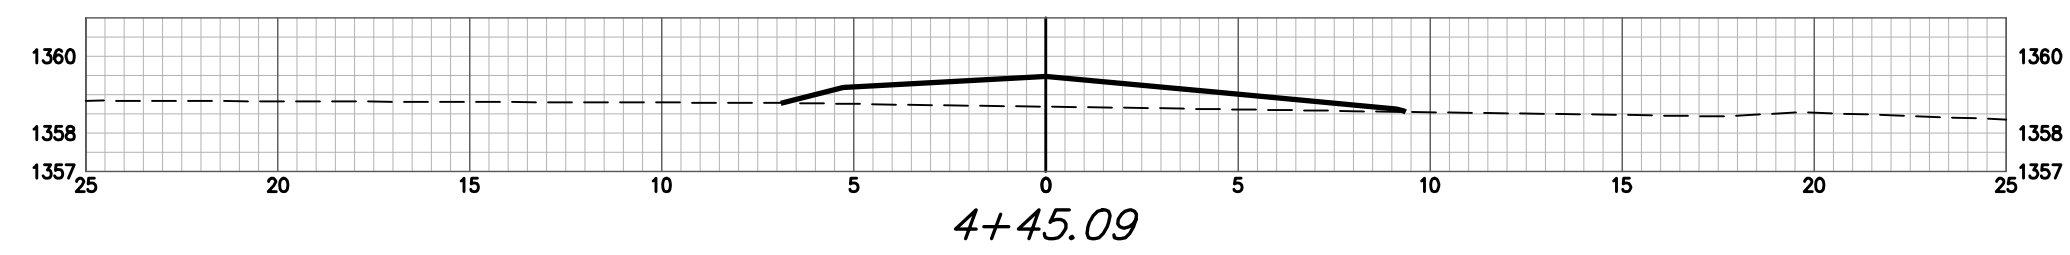

THUNDER CIR.