BENCHMARKS:
BM #1: "□" South end of Womer St. median approximately 565' south of 37th St. N.
Elev. = 1324.11 NAVD88

BM #2: "□" Top of curb inlet, west side of Womer St. approximately 1,400' south of 37th St. N.
Elev. = 1325.82 NAVD88

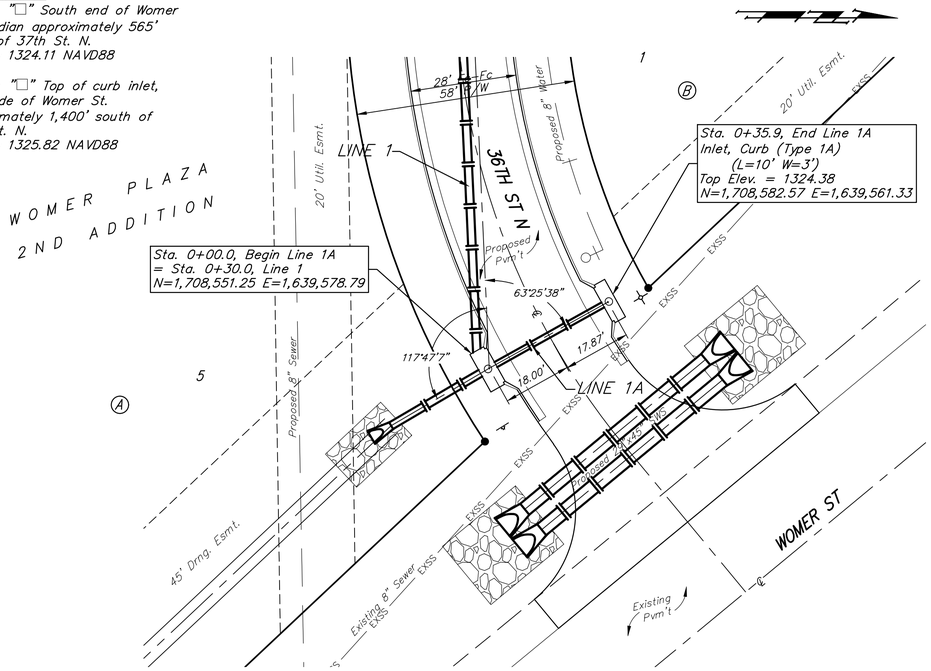

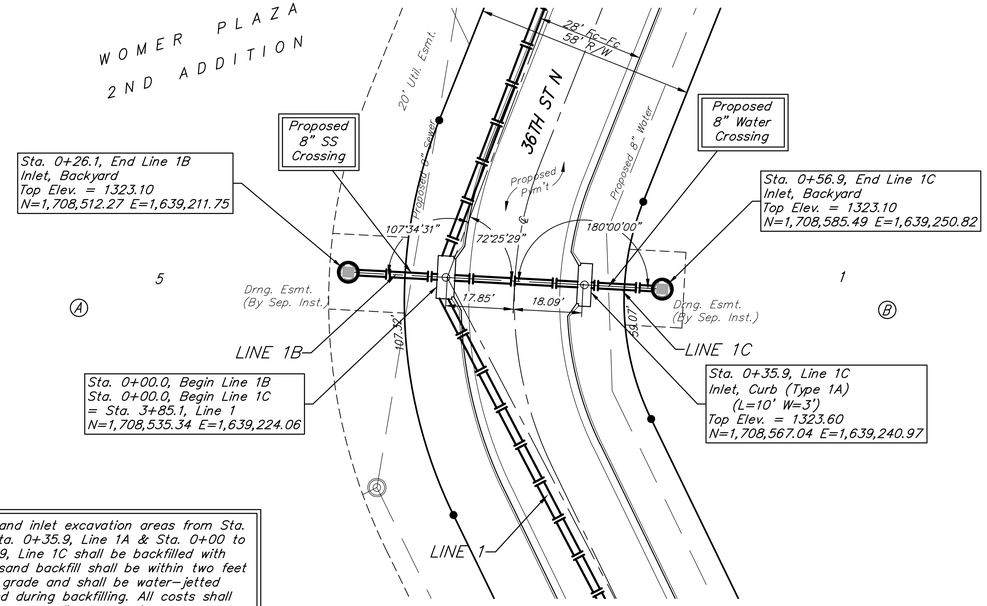



All trench and inlet excavation areas from Sta. 0+00 to Sta. 0+35.9, Line 1A & Sta. 0+00 to Sta. 0+35.9, Line 1C shall be backfilled with sand. The sand backfill shall be within two feet of existing grade and shall be water-jetted and vibrated during backfilling. All costs shall be paid for as L.F. "Fill, Sand (Flushed & Vibrated)".

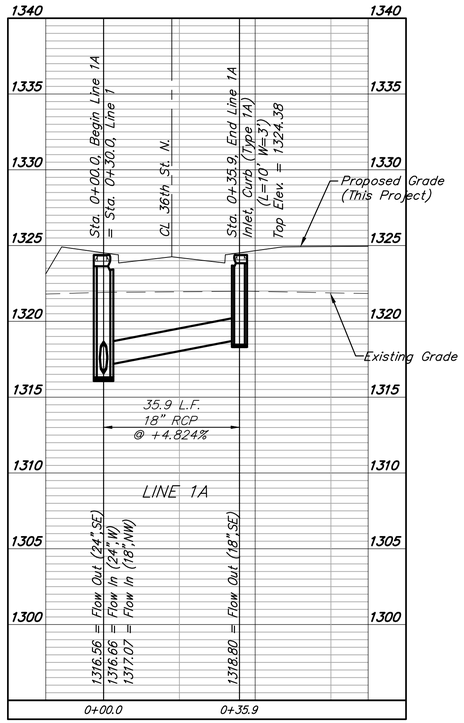

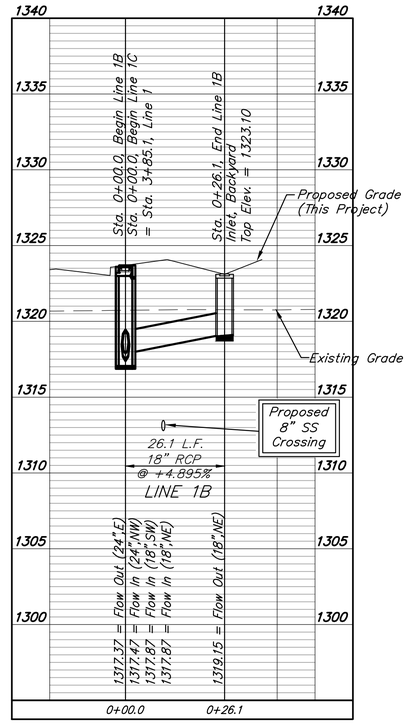

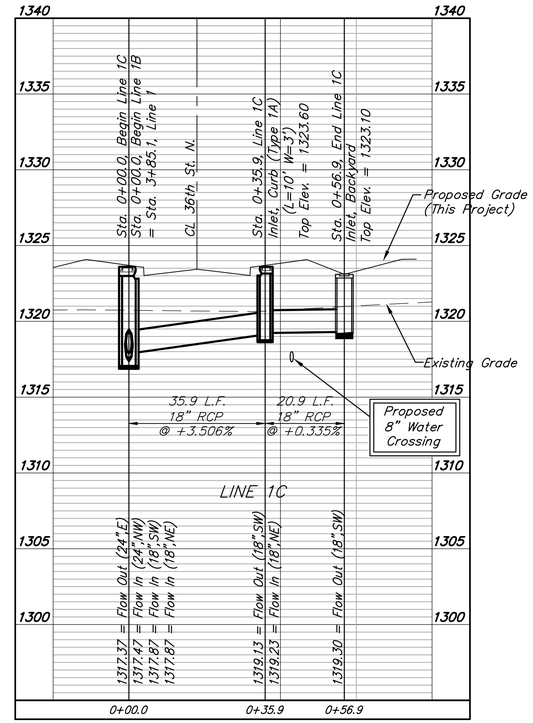

Baughman Company, P.A.
315 Ellis St. Wichita, KS 67211 P 316.262.0149 F 316.262.0189
www.baughmanco.com KANSAS CERTIFICATE OF AUTHORITY NO. E-2010
Baughman
Drawn: NJW Design: NMS Approved:
File: 3Plans.dwg Date: 05/2020

WOMER PLAZA 2ND ADDD.
LINES 1A, 1B, 1C
STORM WATER SEWER IMPROVEMENTS

REVISIONS

SHEET 4 OF 36