



C POOL SECTION
Scale: 3/16"=1'-0"

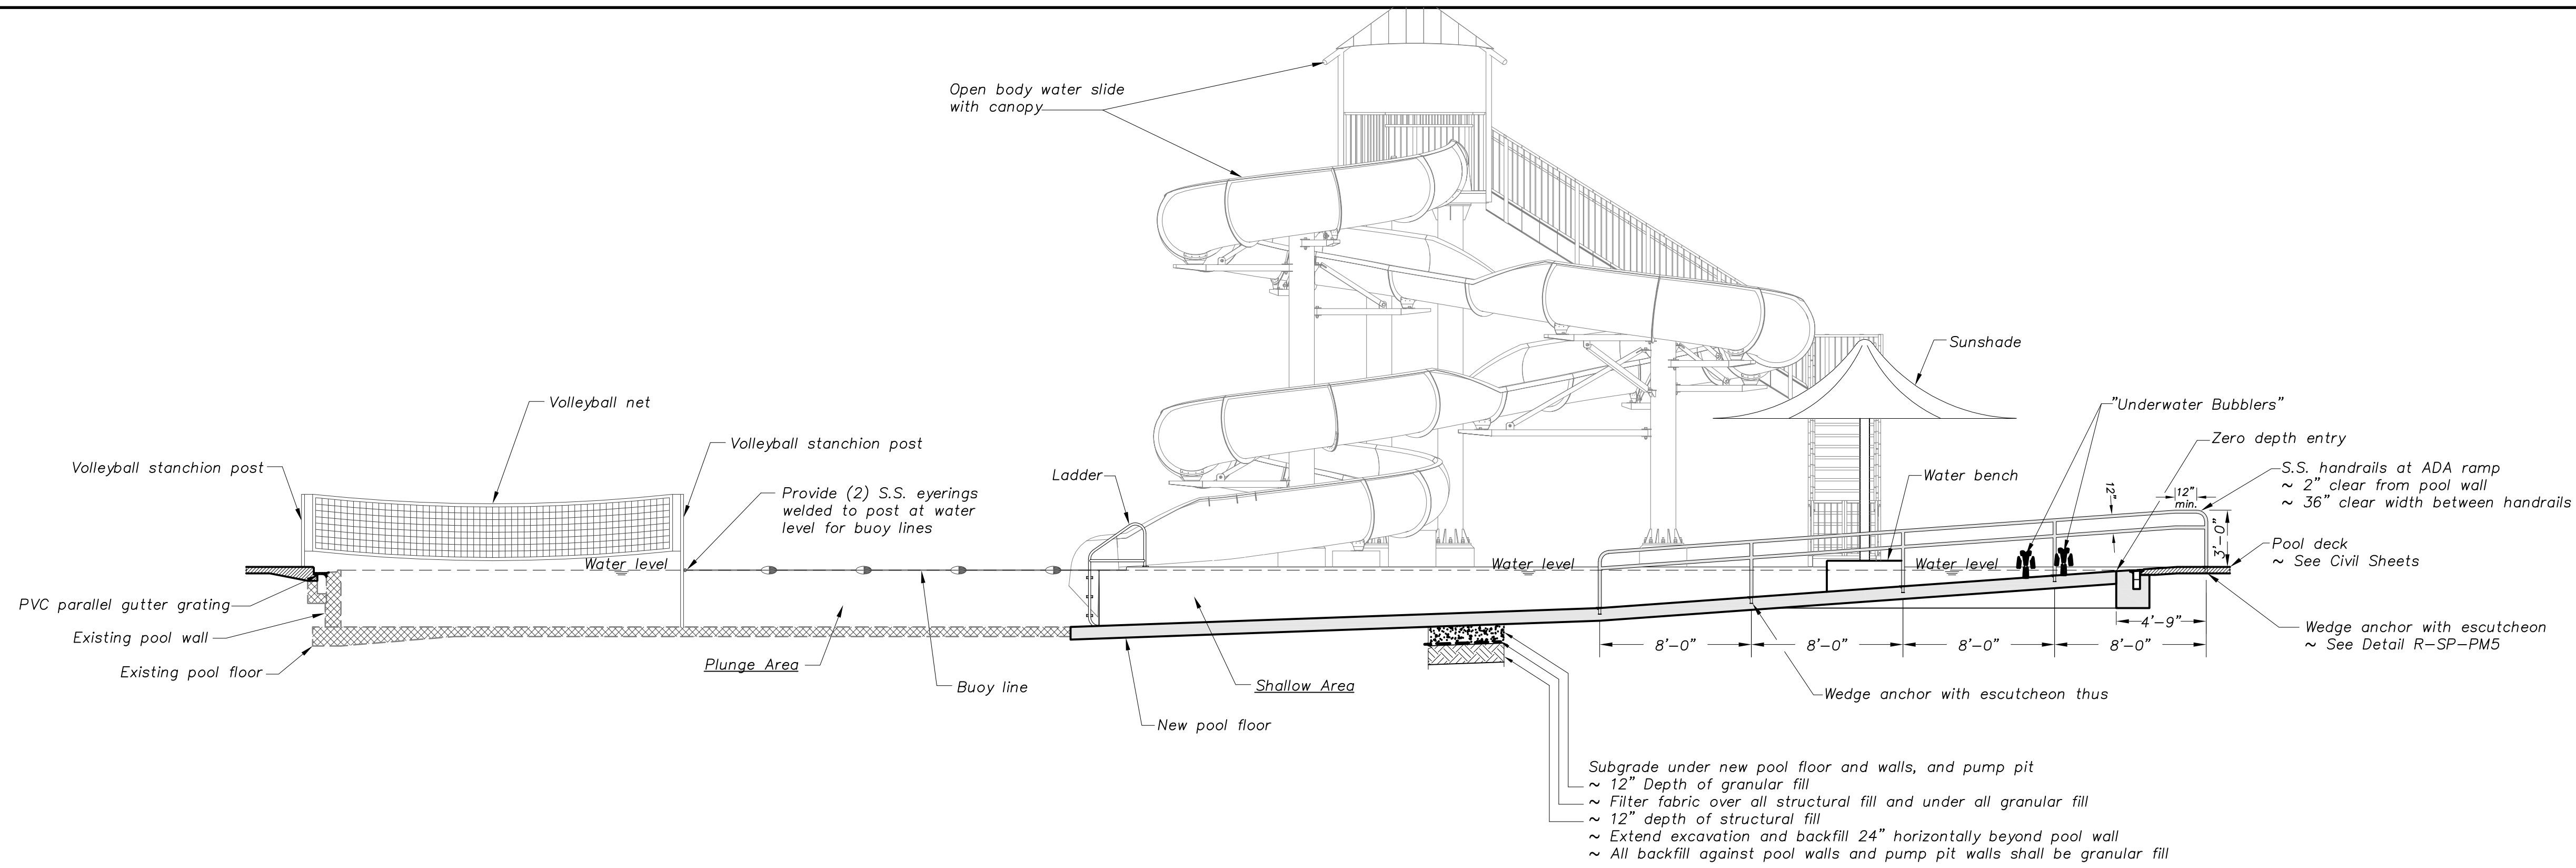

Subgrade under new pool floor and walls, and pump pit
 ~ 12" Depth of granular fill
 ~ Filter fabric over all structural fill and under all granular fill
 ~ 12" depth of structural fill
 ~ Extend excavation and backfill 24" horizontally beyond pool wall
 ~ All backfill against pool walls and pump pit walls shall be granular fill

Subgrade Note:
 Once the excavations for the pool and structures are complete, Contractor shall provide subsurface borings to a depth 15'-0" deeper than the excavations.
 Borings shall be located at main drain, shallow area, and surge pit.
 Contractor shall coordinate results with Geotechnical Engineer for their recommendations and with Pool Engineer.
 Subgrade and backfill criteria shall be adjusted as required.

D POOL SECTION
Scale: 3/16"=1'-0"

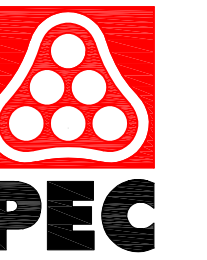

WICHITA, KANSAS
Pool Improvements
HARVEST PARK



Jeff Bartley - ENGINEER
LICENSE #15116

Date: 08-14-20 Job #: 18-512

Drawn: SRS-KHC Checked: JAB

Issue: CONSTRUCTION DOCUMENTS

POOL SECTIONS

SP-P3