

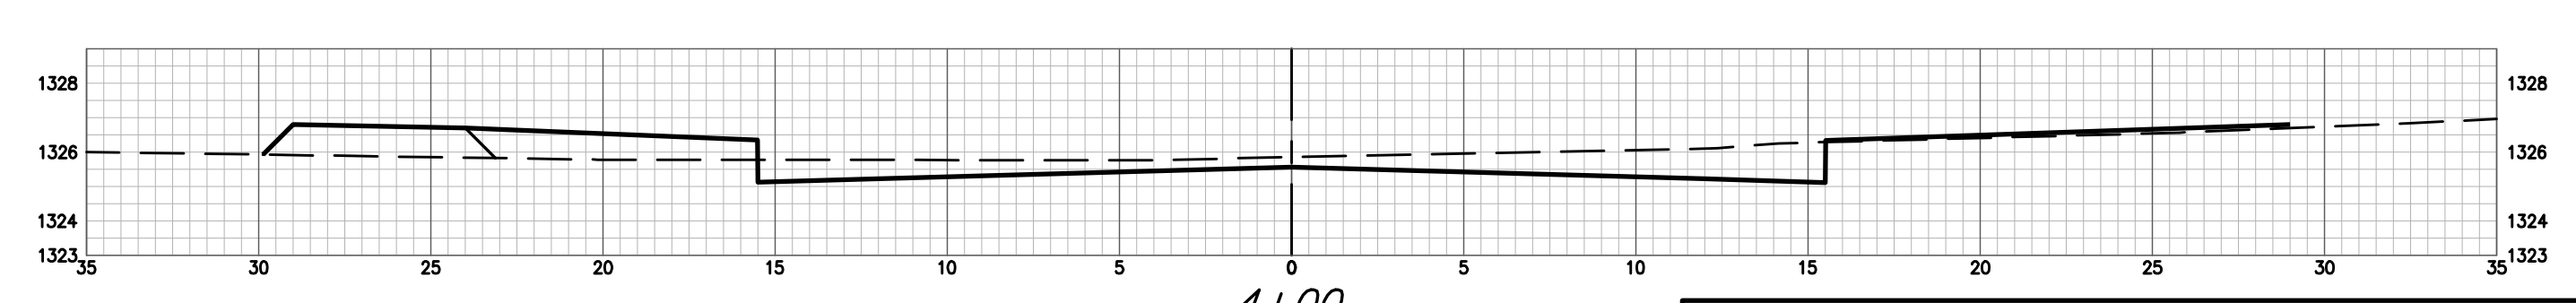


ANNA ST CY Excavation (unadjusted)				ANNA ST CY Compacted Fill (unadjusted)				ANNA ST CY Loose Fill (unadjusted)			
Station	Area	Volume	Total	Station	Area	Volume	Total	Station	Area	Volume	Total
0+37	22.04	0.00	0.00	0+37	1.78	0.00	0.00	0+37	8.40	0.00	0.00
0+50	17.95	9.63	9.63	0+50	2.23	0.97	0.97	0+50	8.62	4.10	4.10
1+00	19.33	34.52	44.14	1+00	3.45	5.26	6.23	1+00	7.77	15.17	19.27
1+50	9.25	26.46	70.61	1+50	4.51	7.37	13.59	1+50	15.40	21.46	40.72
2+00	8.12	16.08	86.69	2+00	4.48	8.32	21.91	2+00	18.05	30.98	71.70
2+50	22.80	28.62	115.31	2+50	2.87	6.80	28.71	2+50	10.92	26.83	98.53
3+00	21.07	40.62	155.93	3+00	2.79	5.24	33.95	3+00	12.55	21.74	120.27
3+50	77.04	90.84	246.77	3+50	1.98	4.41	38.36	3+50	1.58	13.08	133.35
4+00	17.37	94.71	341.48	4+00	5.14	5.33	43.69	4+00	7.08	7.23	140.58
4+50	22.05	37.77	379.25	4+50	3.93	6.68	50.37	4+50	5.53	10.27	150.85
4+96.13	28.30	43.34	422.59	4+96.13	0.35	3.45	53.82	4+96.13	0.12	4.61	155.46

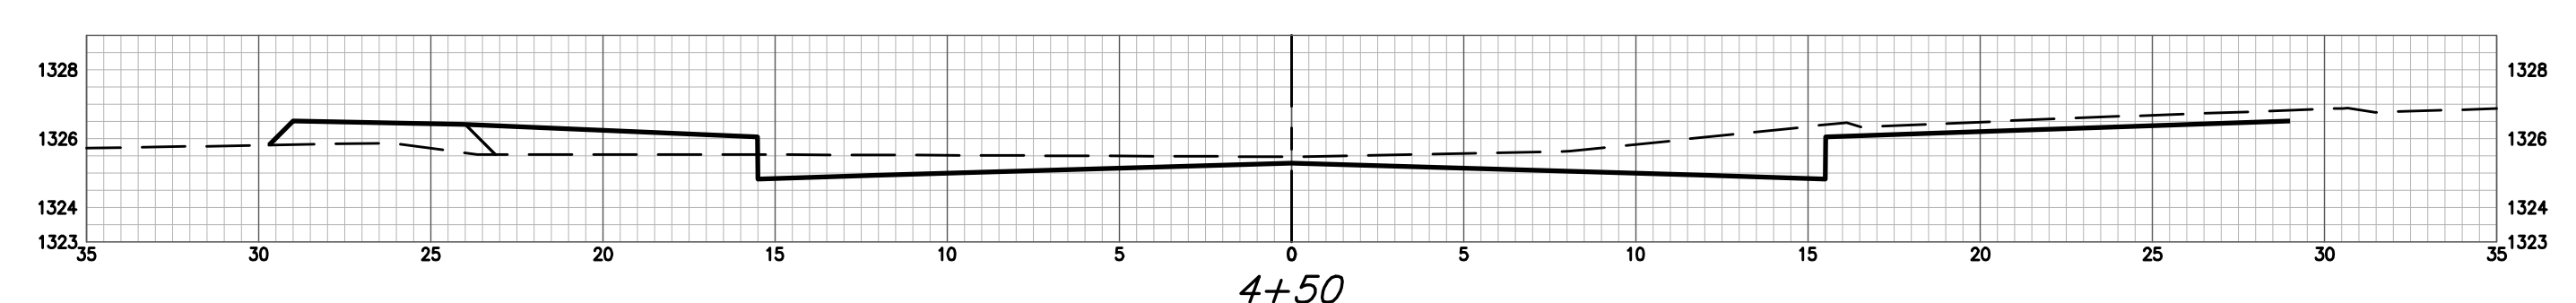

ANNA ST

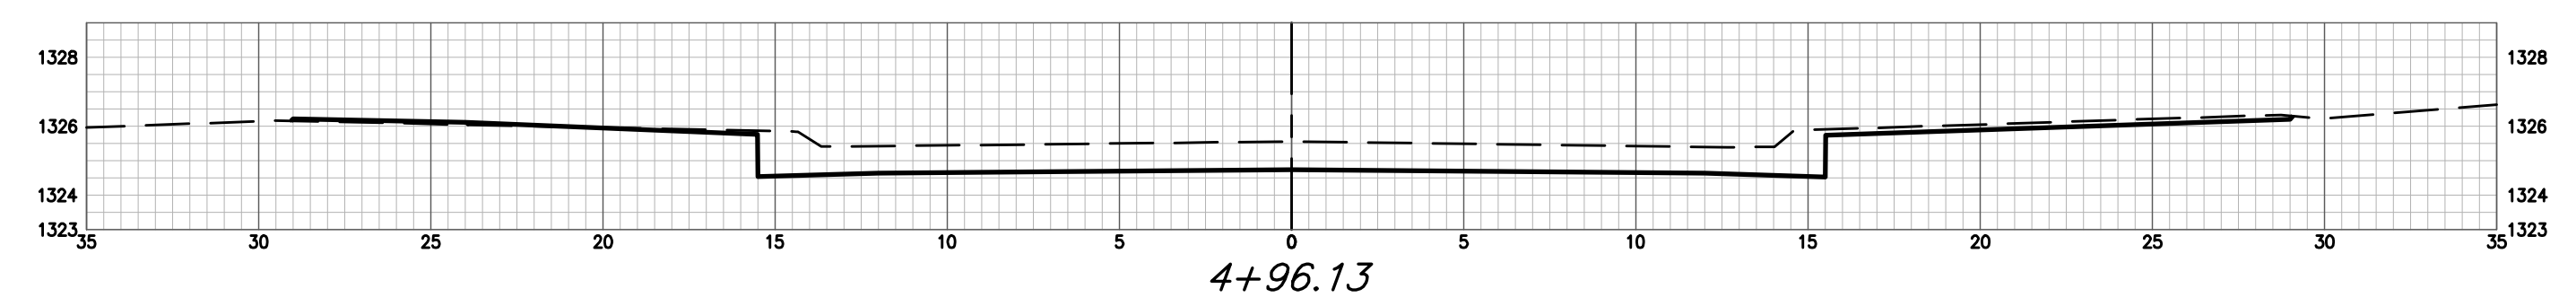