


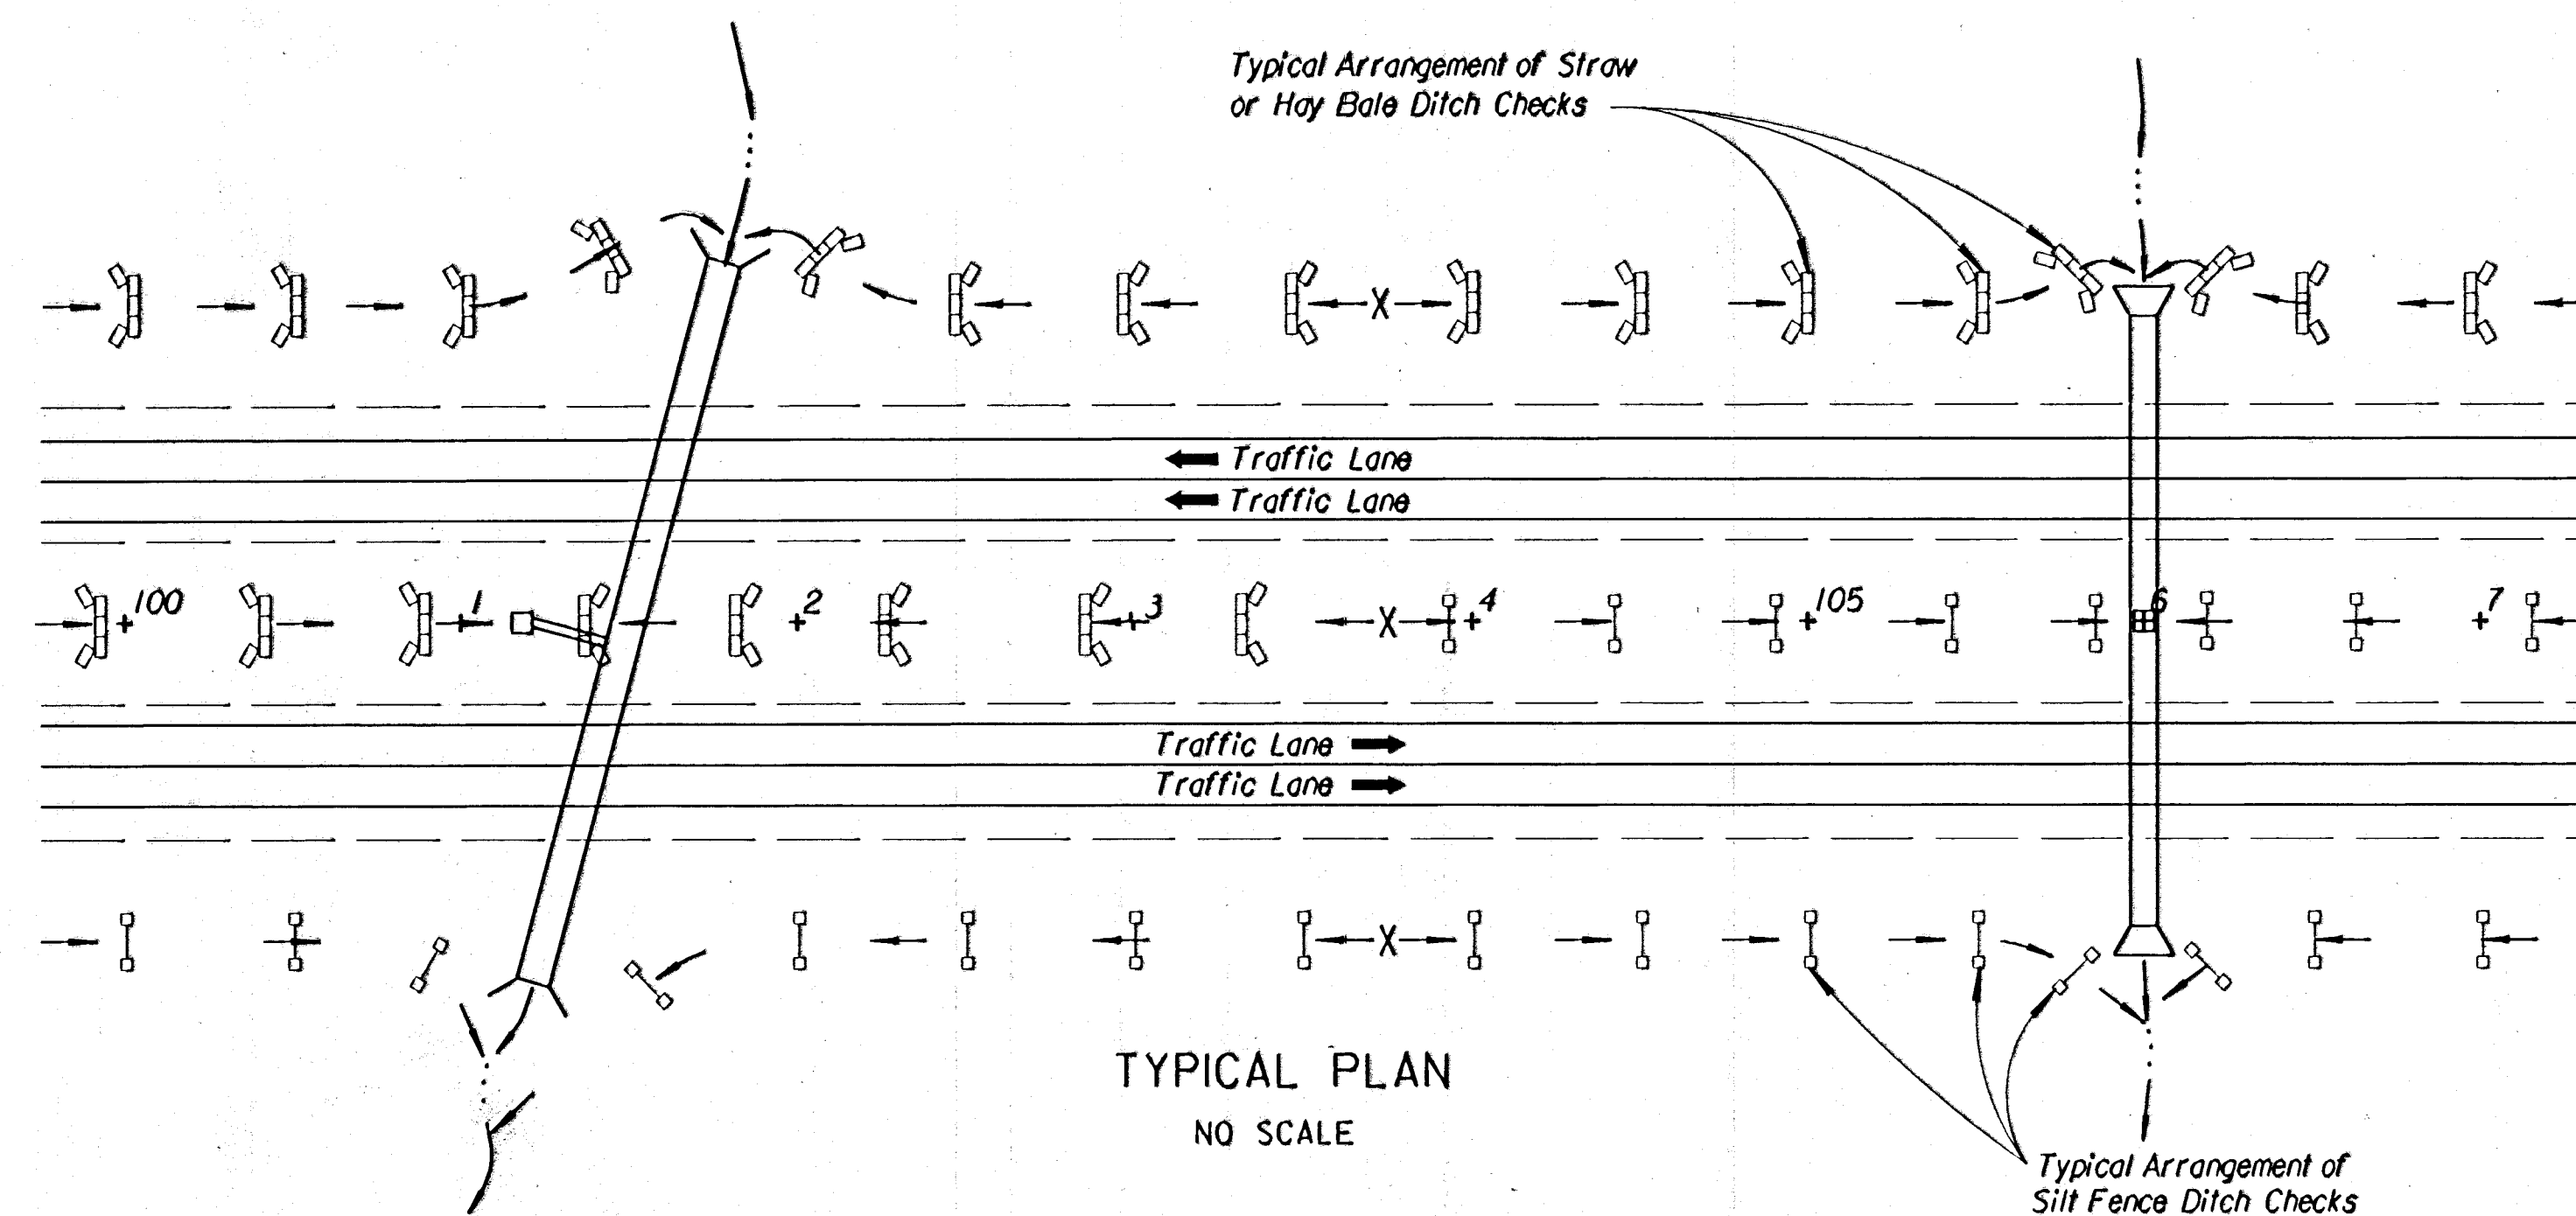


GENERAL NOTES

STRAW OR HAY BALE NOTES:


1. Place Bales tightly together, with loose straw or hay wedged between Bales to close off any openings.
2. Wood Stakes shall be 2" x 2" (nom.) x 4'-0" long (min.)
3. Use as many Bales as necessary to completely block the entire width of ditch flowline, with excess Bale length cut into fore and back slopes.
4. Use as many Bales as necessary on fore and back slopes to insure water does not flow around barrier.
5. Use only twine to bind bales. The use of wire binding is prohibited because it does not readily biodegrade.

SILT FENCE NOTES:

1. Wood Stakes shall be 2" x 2" (nom.) x 5'-0" long (min.)
2. Attach Fence Fabric to wood stakes with staples, wire, or nails.
3. Use as many wood stakes as necessary to achieve a maximum spacing of 5' across ditch cross section.

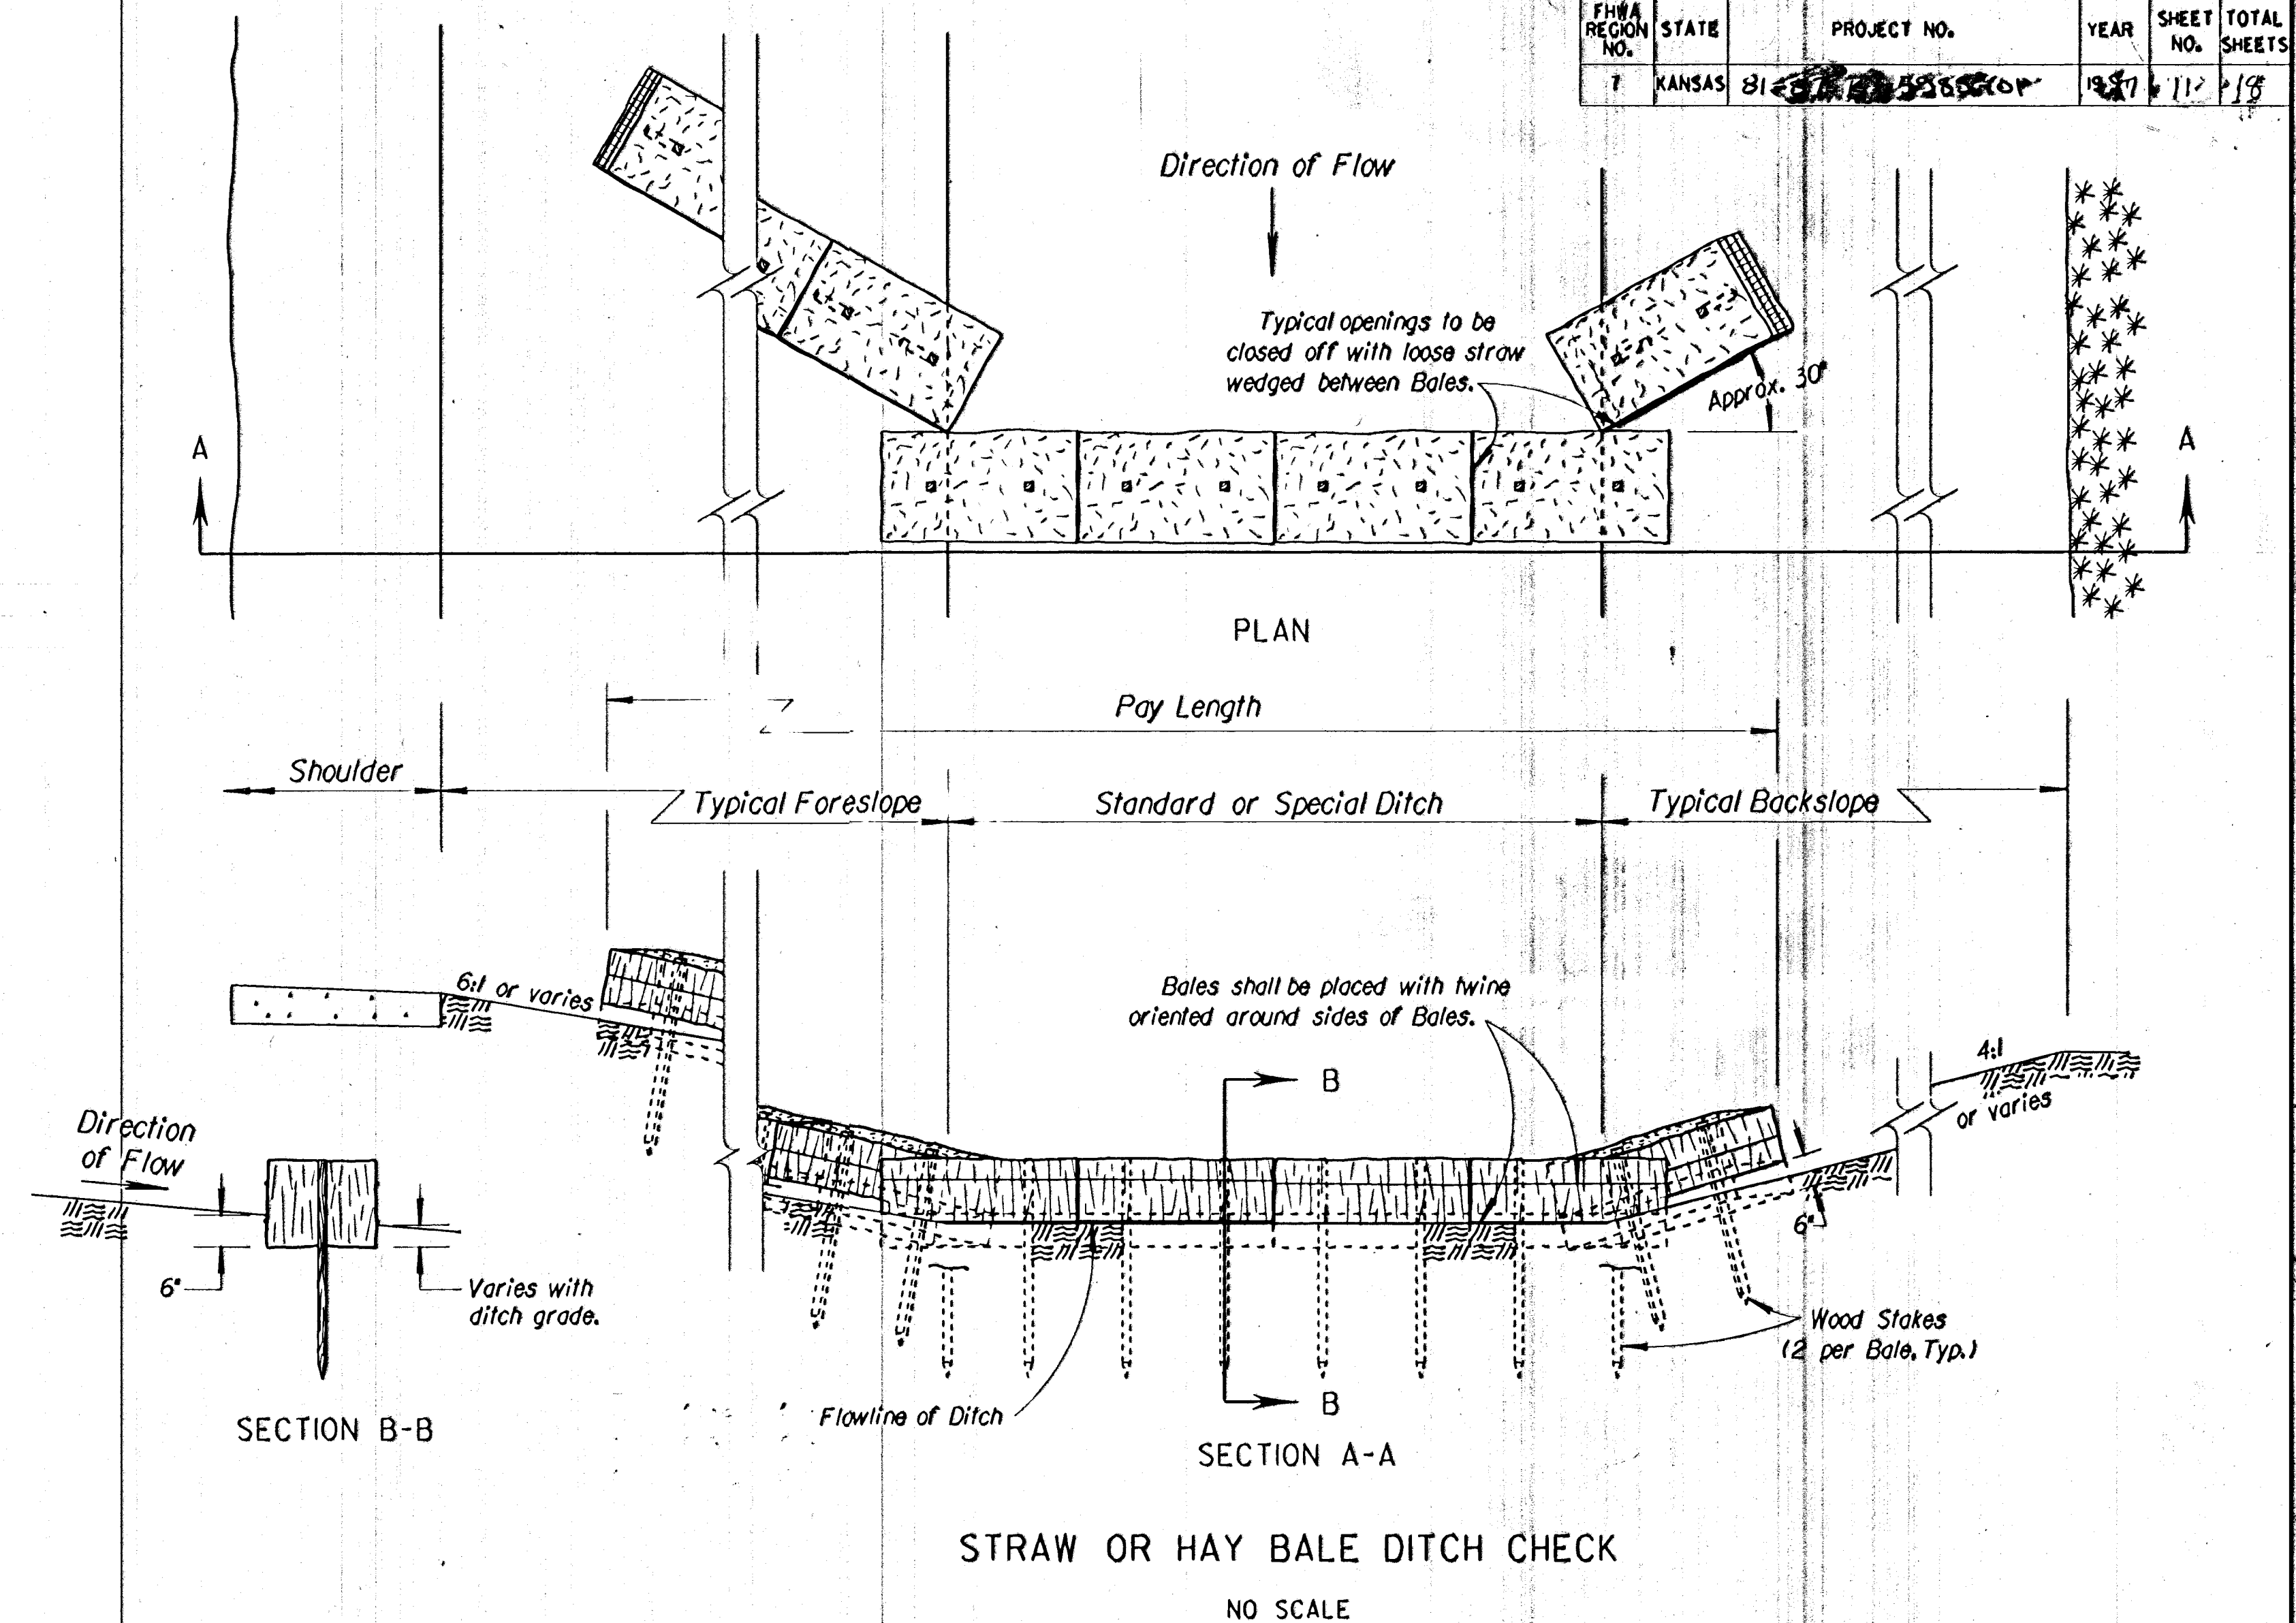

TEMPORARY DITCH CHECK SPACING	
DITCH & SLOPE (%)	SPACING INTERVAL (Ft.)
1.0	200
1.5	133
2.0	100
2.5	80
3.0	66
3.5	57
4.0	50
4.5	44
5.0	40
5.5	38
6.0	35
6.5	30
7.0	28
7.5	26
8.0	25
8.5	23
9.0	22
9.5	21
10.0	20

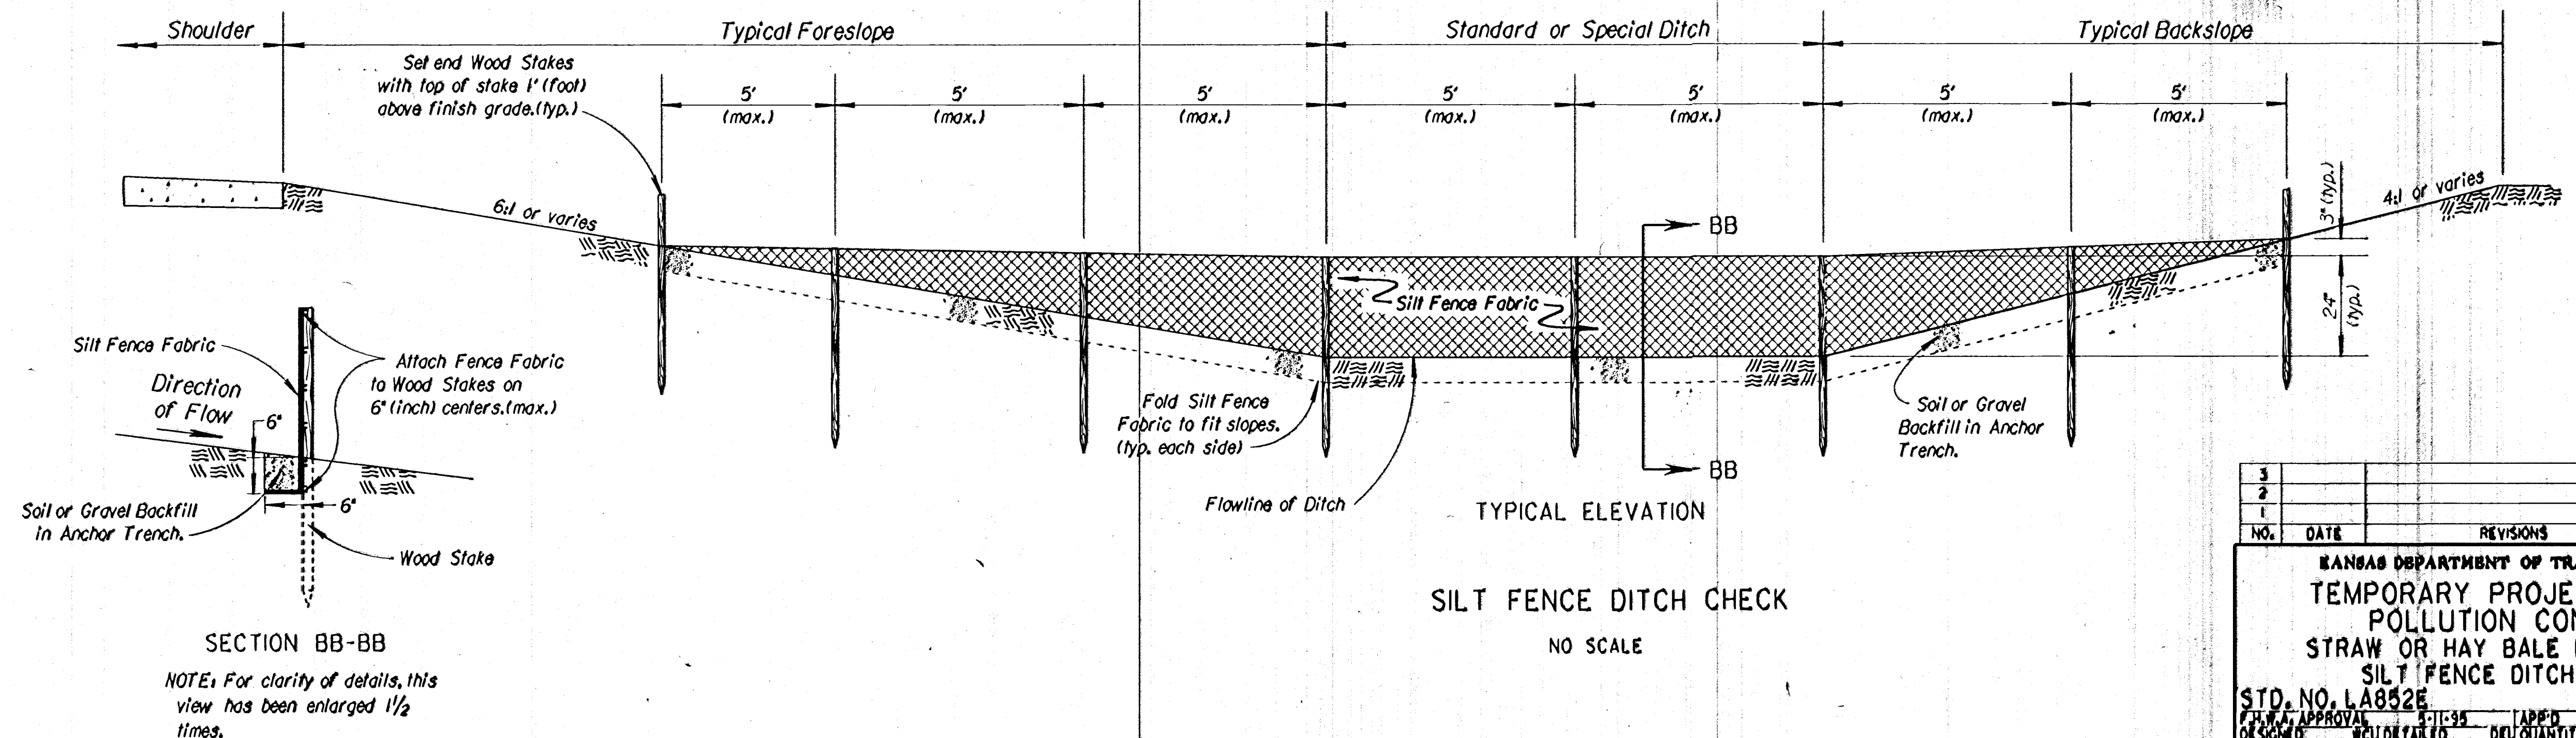

3				
2				
1				
NO.	DATE	REVISIONS	BY	APP'D
KANSAS DEPARTMENT OF TRANSPORTATION TEMPORARY PROJECT WATER POLLUTION CONTROL STRAW OR HAY BALE DITCH CHECKS SILT FENCE DITCH CHECKS STD. NO. LA852E				
K.M.A. APPROVAL		5-11-95	APP'D	Richard G. Hays
DESIGN	W.D. TAYLOR	DEL. QUANTITIES	TRACE	W.C.
DESIGN CH.	ADRIAN TAYLOR	W.D. QUANTITIES	TRACE	W.C.