

DRAWING NAME: 56-92005 IC DEMO  
CENTER COORDINATES: 739  
ROTATION ANGLE: 0  
DATE LAST WORKED ON: SEPT. 22, 1994  
BRENT REWSBERG

| PLAN      | SURVEYED | BY  | DATE |
|-----------|----------|-----|------|
|           |          |     |      |
| NOTE BOOK | NO.      | NO. | NO.  |
| ALIGNMENT | CHECKED  |     |      |
| BY        | DATE     |     |      |

SCALE: 1"=20'

Remove Curb and Gutter  
and Pavement and Sidewalk  
within the Limits  
indicated by Hachures

Remove Inlet

Const. Limits

Remove Retaining Wall  
completely and Sidewalk  
as noted by Hachures

Remove Poles  
and Sign

Remove Water Meter  
and Concrete Vault.  
Cap existing pipe.

Remove Totem Pole and  
Foundation. Salvage to  
a location designated on  
Indian Center Property.  
and Re-install per  
Landscape Plans.

Remove Curb and Gutter  
and Pavement within the  
Limits indicated by Hachures

Remove Portland Cement  
Concrete Ring

Remove Flagpoles and Foundations  
Salvage Poles to a location  
Designated on Indian Center  
Property and Re-install per  
Hardscape Plans.

Remove Yard Light and Base  
Salvage to a location  
on Indian Center Property  
(Typical 7 locations)

Remove Sidewalk within the  
Limits indicated by Hachures

Remove Sprinkler Head  
(Typical Approx. 12 locations)  
Salvage to a location designated  
on Indian Center Property  
See General Note


#### GENERAL NOTES

- UNLESS OTHERWISE NOTED, OR DIRECTED AT THE TIME OF CONSTRUCTION, REMOVE ALL TREES WITHIN THE CONSTRUCTION AND HAUL OFF SITE TO AN APPROVED DISPOSAL AREA.
- ALL SPRINKLER HEADS LOCATED WITHIN THE CONSTRUCTION LIMITS SHALL BE REMOVED. LINES INTERRUPTED BY THESE REMOVALS WHICH CONNECT TO LINES TO REMAIN SHALL BE CAPPED OR SPLICED AS APPLICABLE. NO SEPARATE PAYMENT WILL BE MADE FOR THIS WORK AND IT SHALL BE CONSIDERED INCIDENTAL TO OTHERS ITEMS OF DEMOLITION.
- REMOVAL OF CURB AND GUTTER AND PAVEMENT CONTIGUOUS TO EXISTING ENTRANCE SHALL BE DELAYED UNTIL THE NEW ENTRANCE IS COMPLETE AND OPERATIONAL.
- DEMOLITION OF PAVEMENT AROUND THE TOTEM POLE SHALL BE DELAYED UNTIL WORK IN THIS AREA CAN BE COMPLETED WITHOUT DELAY OR INTERRUPTION.
- UNLESS OTHERWISE NOTED, ALL MATERIAL REMOVED SHALL BE HAULED OFF SITE AND DISPOSED OF AT AN APPROVED LOCATION.
- SEE SH. NO. 15-1 FOR ADDITIONAL REMOVAL ITEMS.

Layout Control Point  
#4 bar w/ PEC Cap set at point  
See Sh. No. for Additional Information

BENCHMARK  
CHISELED "B" ON TOP OF CURB AT SOUTHWEST CORNER  
OF EXISTING PARKING BAY APPROXIMATELY 96 FEET  
WEST OF BUILDING. 9021.208N, 12455.685E  
ELEV. -112.62

| REV. | DATE | DESCRIPTION |
|------|------|-------------|
|      |      |             |
|      |      |             |
|      |      |             |
|      |      |             |
|      |      |             |
|      |      |             |
|      |      |             |
|      |      |             |
|      |      |             |

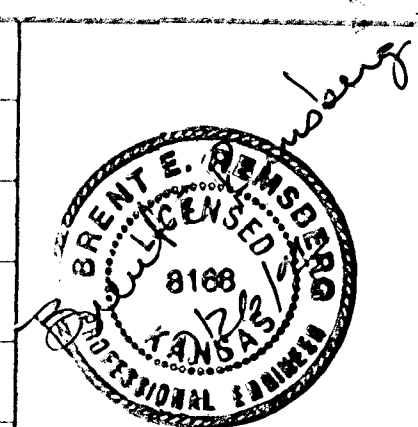

HELLMUTH, OBATA & KASSEBAUM, INC.  
DALLAS, TEXAS  
PROFESSIONAL ENGINEERING  
CONSULTANTS, P.A.  
WICHITA, KANSAS  
BRAD J. GOLDBERG  
DALLAS, TEXAS

MID-AMERICA  
ALL-INDIAN CENTER  
SITE IMPROVEMENTS  
CITY OF WICHITA, KANSAS

#### DEMOLITION PLAN

| PROJECT NO. | ISSUE DATE | SCALE  | SHEET |
|-------------|------------|--------|-------|
|             |            | 1"=20' | D-1   |