



DESIGN	PROJ.	CO.	CHK.
DATE	DATE	DATE	DATE
DATE	DATE	DATE	DATE
DATE	DATE	DATE	DATE
DATE	DATE	DATE	DATE
DATE	DATE	DATE	DATE
DATE	DATE	DATE	DATE
DATE	DATE	DATE	DATE


Drawn By : JRA/RAS	View =
DGN File : 1995/95088/douglas/rcb6x4.dgn	
Plotted : wll 8-25-97	

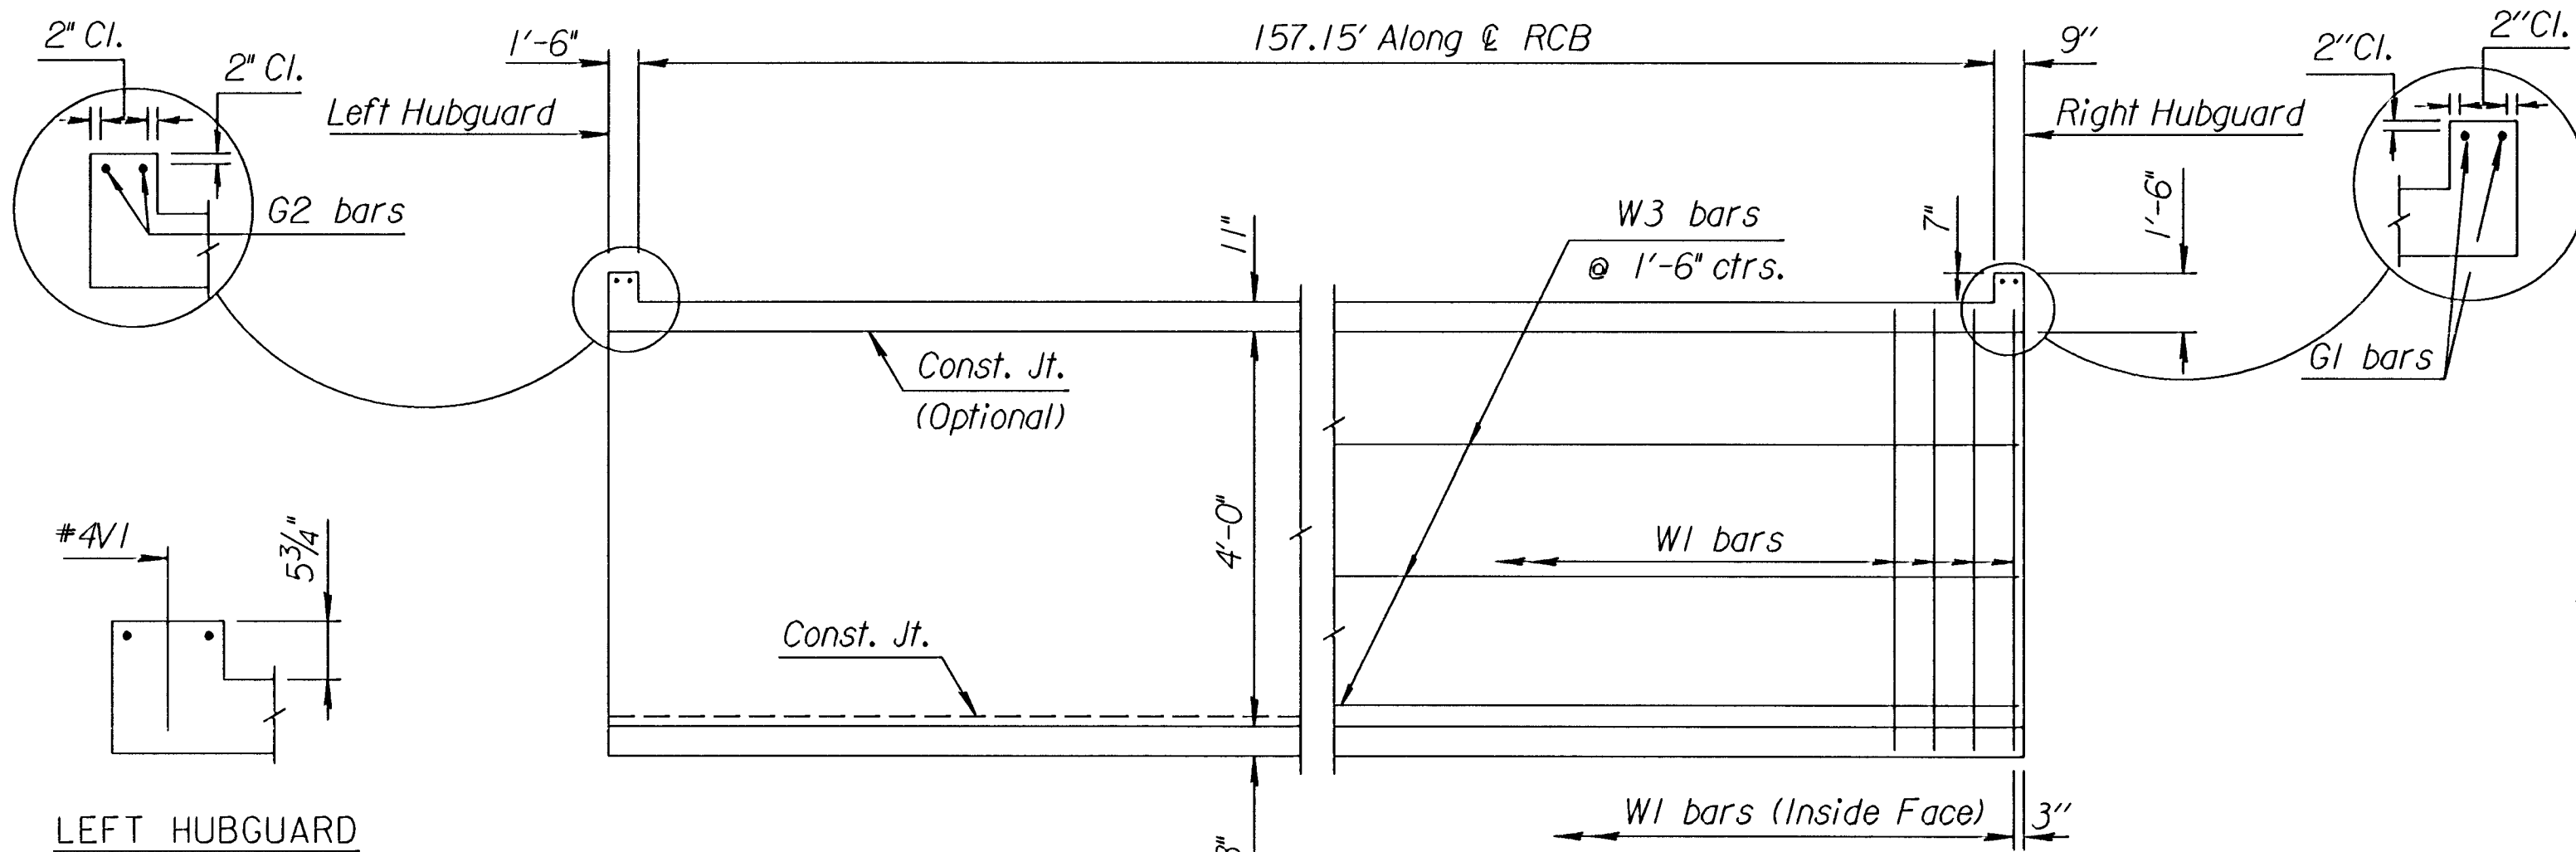


SECTION AND ELEVATION
(Along & RCB)

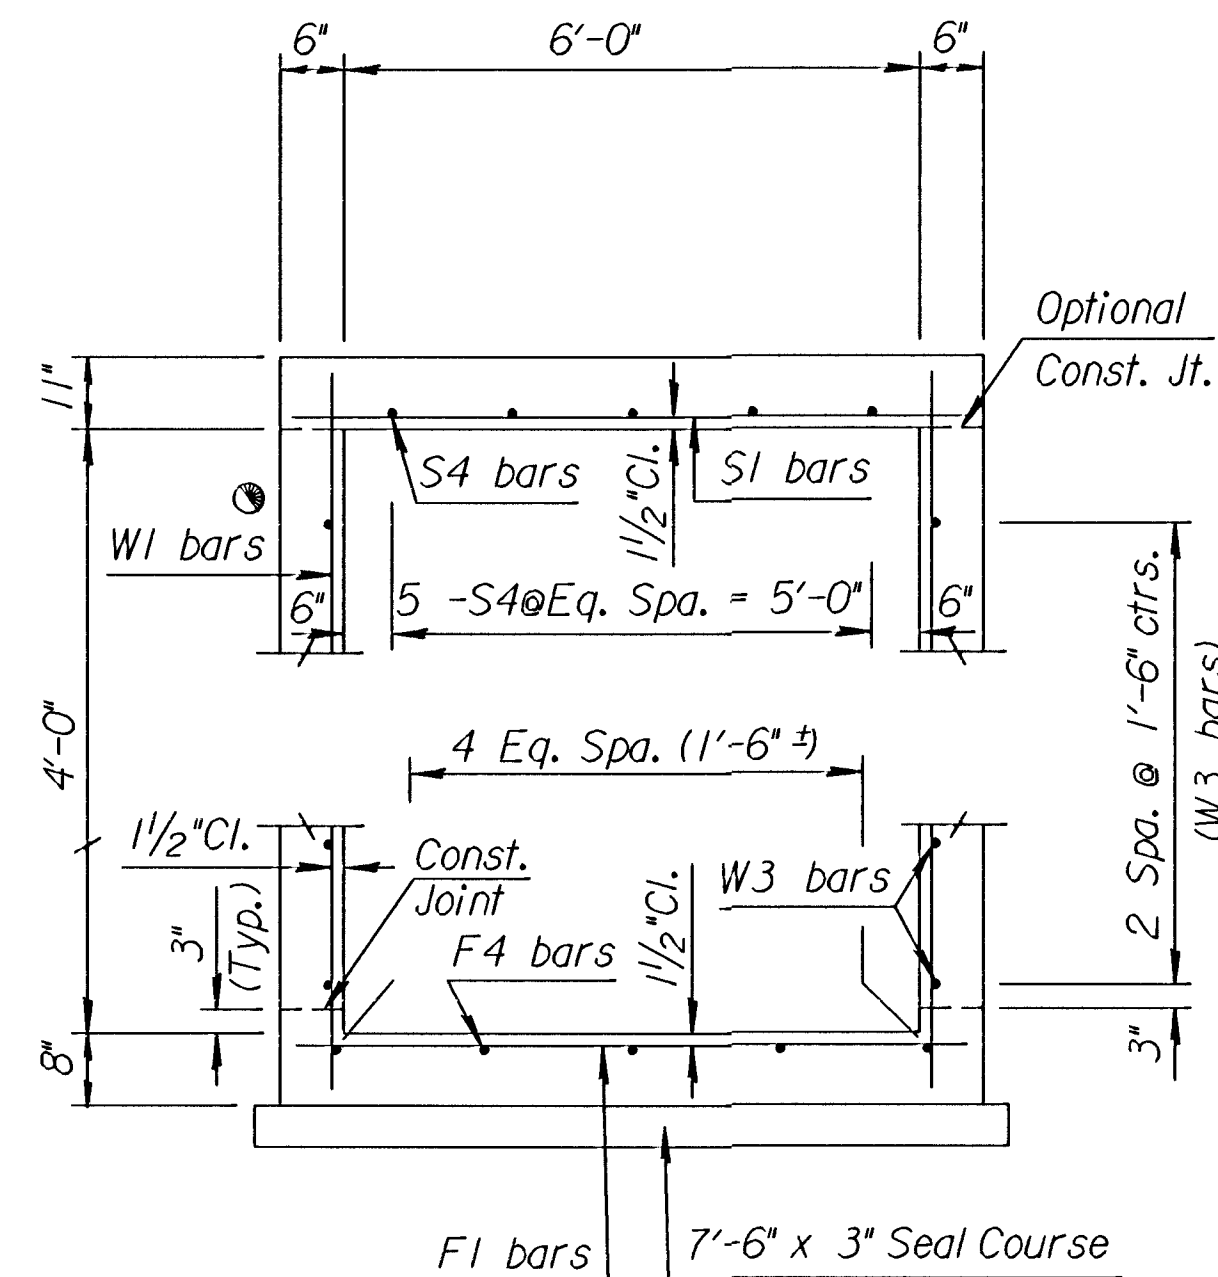

TYPICAL SECTION

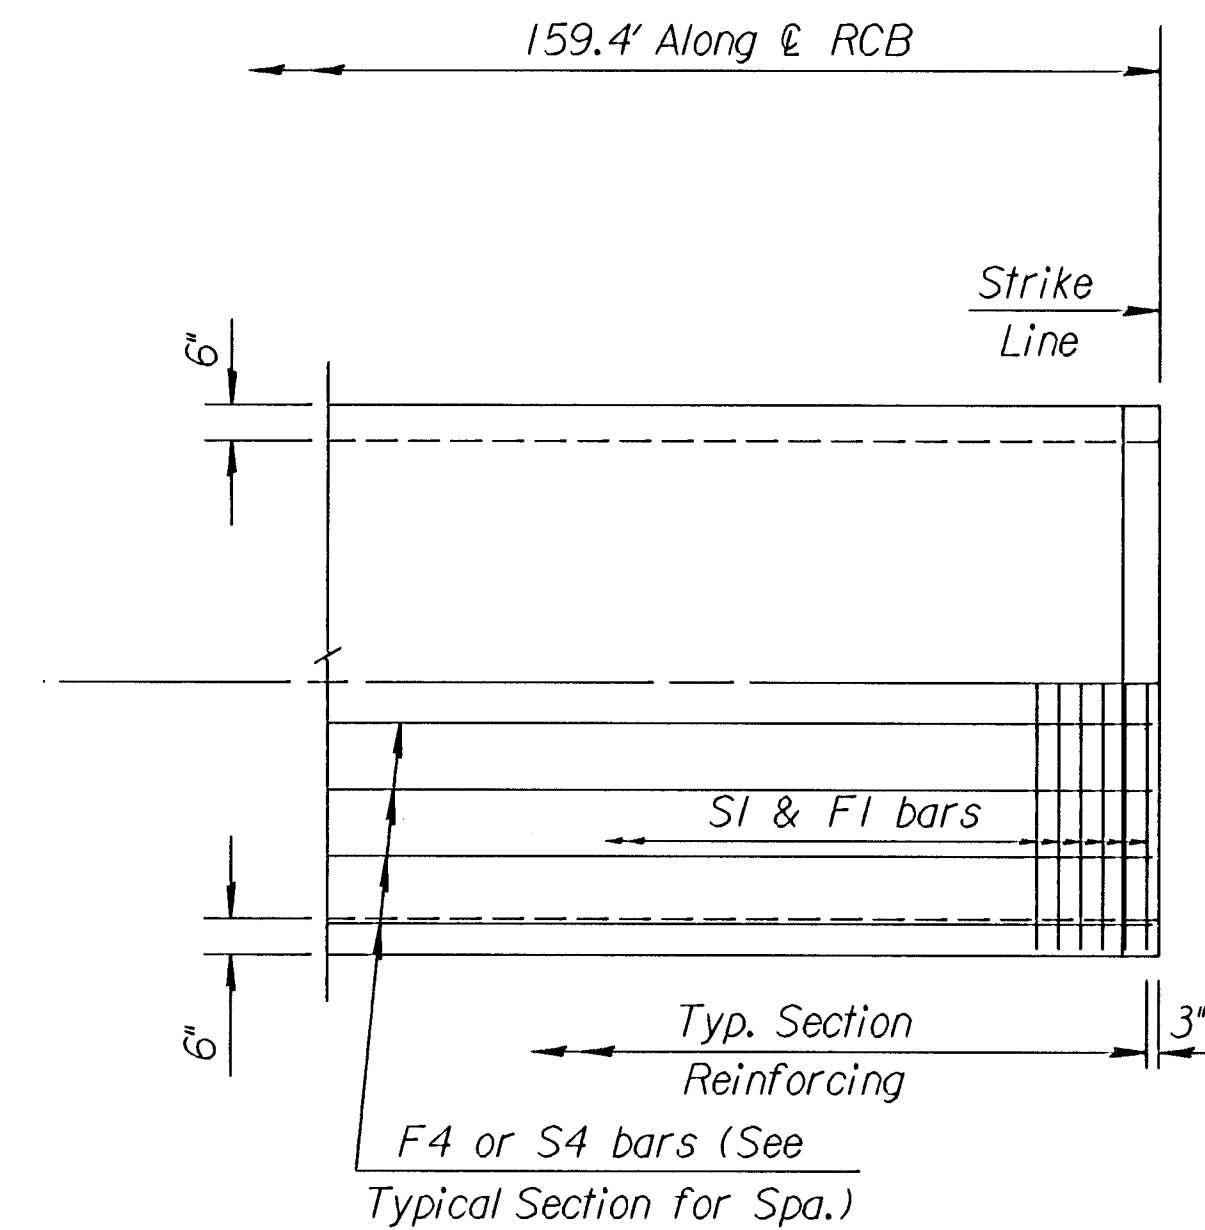

PLAN

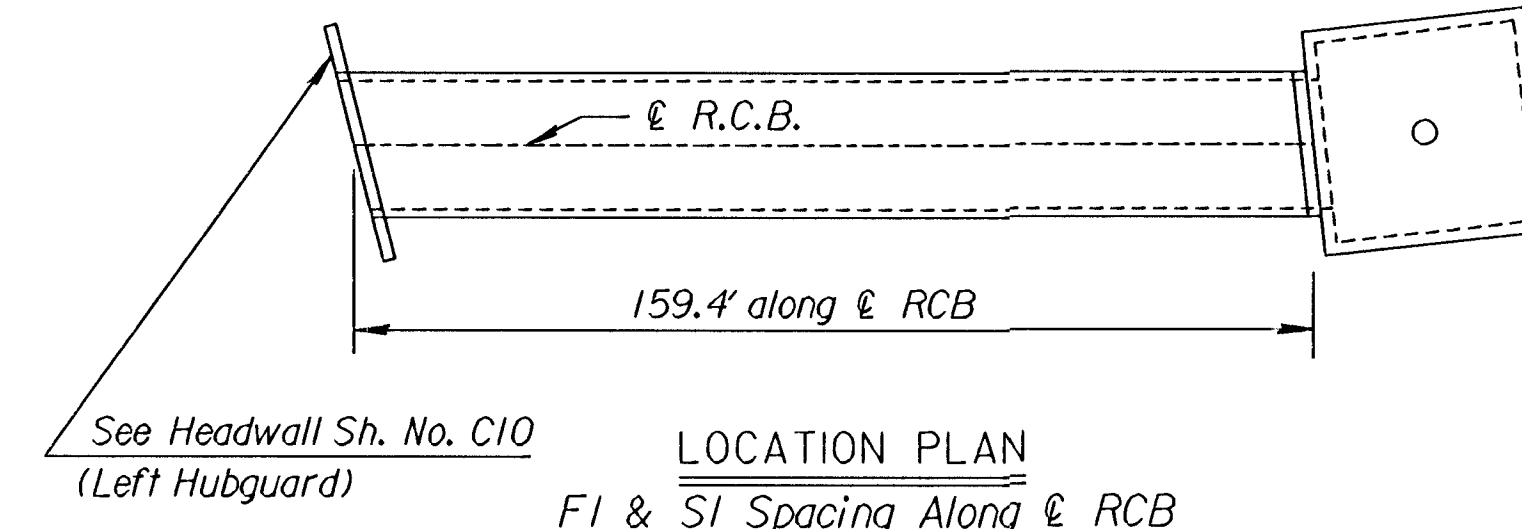

LOCATION PLAN
F1 & S1 Spacing Along & RCB

See RCB Auxillary Details for Optional Splice.

GENERAL NOTES

LOADING: HS20-44 AASHTO Specifications, 1983 Edition.
UNIT STRESSES: Class AAA Concrete; $f'_c = 4,000$ p.s.i.
 Reinforcing Steel; $f_y = 60,000$ p.s.i.
FILL HEIGHT: Unless otherwise noted, the Design Fill Height is measured from the riding surface at the culvert and shall include the surfacing.
CONCRETE: Class AAA Concrete (AE) shall be used throughout. Bevel all exposed edges with a $\frac{3}{4}$ inch triangular moulding.
REINFORCING: All reinforcing shall conform to ASTM A615, Grade 60. All dimensions relative to reinforcing steel shall be to centerline of bar unless otherwise noted.
EXCAVATION: Excavation for culverts less than bridge length shall not be paid for directly but shall be subsidiary to Class AAA Concrete (AE). Excavation for RCB Bridges shall be paid for as Class III Excavation.
QUANTITIES: The quantities shown in the Culvert Summary include apron and/or soil saver quantities when their construction is required by the plans.
BASIS OF PAYMENT: The "6'x4' RCB" SWS Line B-1 shall be bid as a lump sum which shall include all labor, materials, excavation, concrete, reinforcing steel, and all other incidentals necessary to complete the work. Quantities are shown for information only. Precast sections are an allowed substitute for cast-in-place.

CULVERT SUMMARY														
Flow Line Elev. Lt.	Flow Line Elev. Rt.	Crown Gr. Elev.	Design Fill Ht.	Skew	Left Wings	Right Wings	Scour Apron	Soil Saver	Granular Backfill	Concrete Barrel (Cu.Yds.)	Headwall (Cu.Yds.)	Total (Cu.Yds.)	Reinf. Steel (Gr. 60) Barrel (Lbs.)	Headwall (Lbs.)
1279.30	1281.66	1300.23	14	0	SPECIAL	NONE	NO	NO	NO	89.16	2.14	91.30	8356.26	116.89

** Headwall
 Δ Epoxy Coated Bars
 * See Bending Diagram

BAR SCHEDULE																							
Δ F1				Δ F4				Δ S1				Δ G1				Δ S4				Δ W1			
Size	Spa.	No.	Length	Size	Spa.	No.	Length	Size	Spa.	No.	Length	Size	Spa.	No.	Length	Size	Spa.	No.	Length	Size	Spa.	No.	Length
5	5"	384	6'-8"	-	-	-	-	-	-	-	-	4	25	33'-1"	5	6"	320	6'-8"	-	-	-	-	-
Δ W3				Δ W2				Δ W1				Δ W3				Δ W2				Δ W1			
5	5"	384	6'-8"	-	-	-	-	-	-	-	-	4	25	33'-1"	5	6"	320	6'-8"	-	-	-	-	-

Minimum Splice Lengths	
#4	1'-4"
#5	1'-8"
#6	2'-0"

For information only

SUMMARY OF QUANTITIES	
Class AAA Concrete (Seal Course)	11.1 C.Y.
Class AAA Concrete (AE)	91.3 C.Y.
Class III Excavation	— C.Y.
Reinforcing Steel (Gr. 60)	— Lbs.
Reinforcing Steel (Epoxy Coated)	8475 Lbs.
Foundation Stabilization (Set)	— C.Y.
Granular Backfill (Wingwalls) (Set)	— C.Y.
Excavatable Flowable Fill	159 L.F.

KANSAS DEPARTMENT OF TRANSPORTATION			
NO.	DATE	REVISIONS	BY APP'D
SINGLE 6' x 4' RCB SWS LINE B-1			
S.D. No. 106.04		SEDGWICK CO.	
DESIGNED	6-5-91	APP'D	KENNETH F. HURST
DESIGN CK.	DETAIL CK.	QUANTITIES	TRACE CK.