

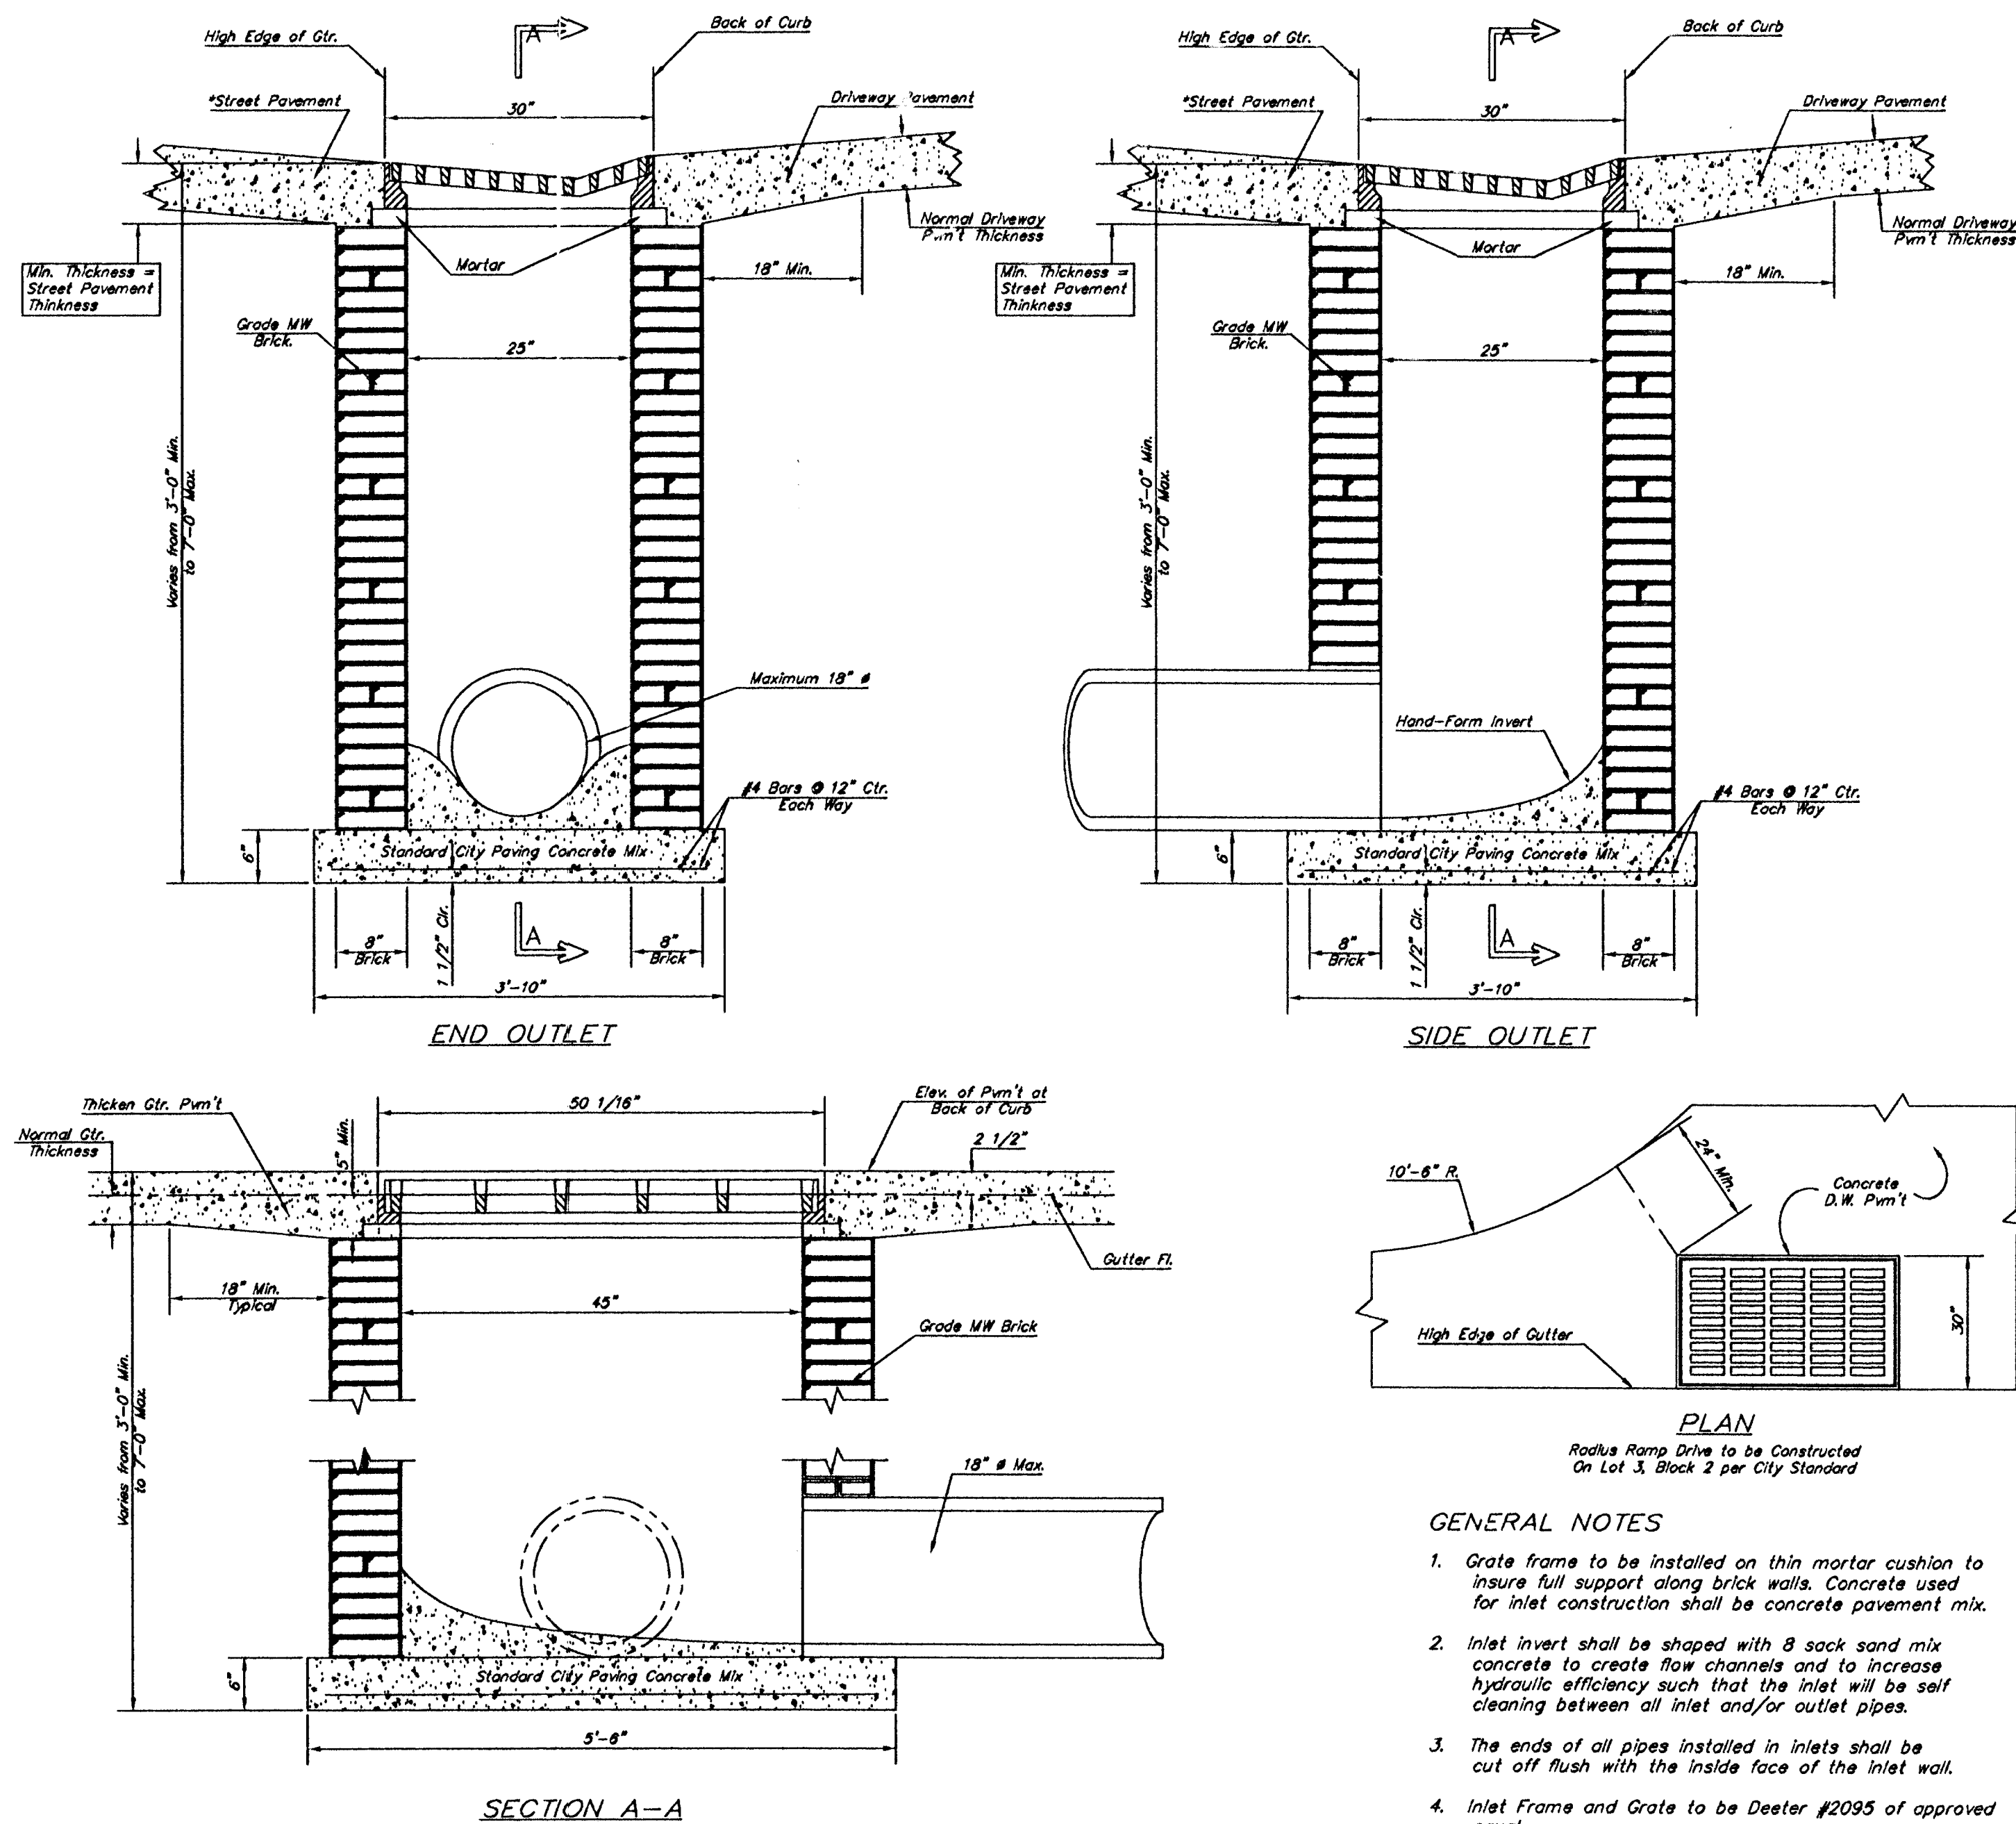
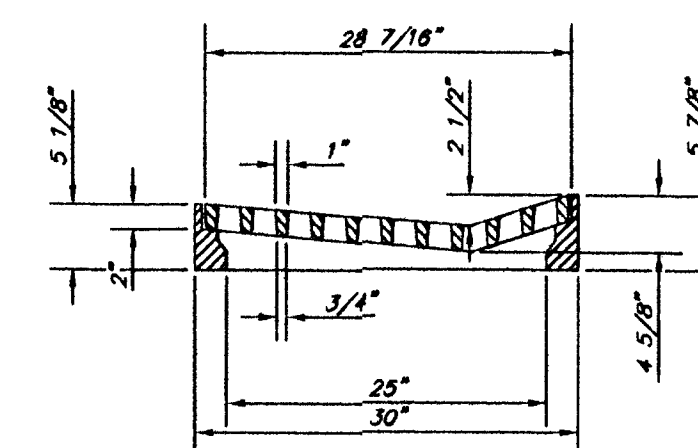


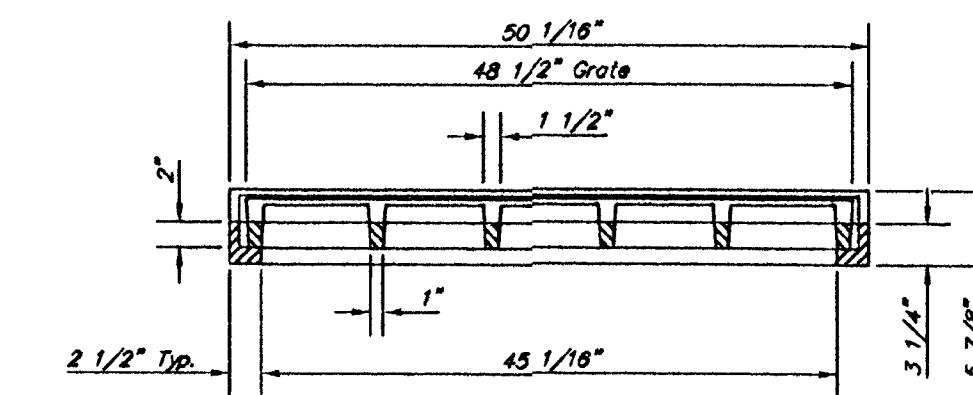


GENERAL NOTES

1. Grate frame to be installed on thin mortar cushion to insure full support along brick walls. Concrete used for inlet construction shall be concrete pavement mix.
2. Inlet invert shall be shaped with 8 sack sand mix concrete to create flow channels and to increase hydraulic efficiency such that the inlet will be self cleaning between all inlet and/or outlet pipes.
3. The ends of all pipes installed in inlets shall be cut off flush with the inside face of the inlet wall.
4. Inlet Frame and Grate to be Deeter #2095 of approved equal

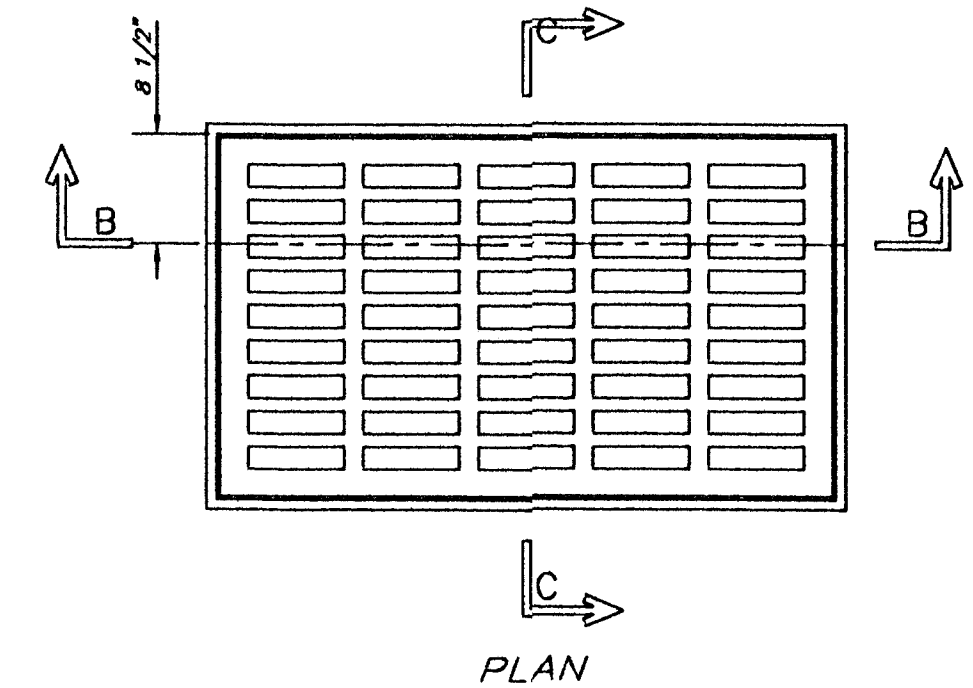

DEETER #2095 FRAME & GRATE
TOTAL WEIGHT: 705 lbs.

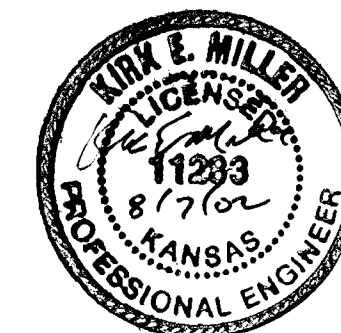

Driveway Inlet Graded Lid Single

PROJECT NO. 472 83608
MVP PROJECT NO. 101008
DATE: August 7, 2002
REVISED

SHEET
CV 3.4

WEST DOUGLAS STREETSCAPE
ARKANSAS RIVER TO SENECA
WICHITA, KANSAS

ARCHITECTS • PLANNERS • LANDSCAPE ARCHITECTS
25 S. WASHINGTON WICHITA, KANSAS 67202
P.O. BOX 100 WICHITA, KANSAS 67201
TEL: 316/264-0242 FAX: 316/264-0243
MCCUUGAGE VAN SICKLE & PERRY