


BROOKVIEW CIR CY Excavation (unadjusted)				BROOKVIEW CIR CY Compacted Fill (unadjusted)				BROOKVIEW CIR CY Loose Fill (unadjusted)			
Station	Area	Volume	Total	Station	Area	Volume	Total	Station	Area	Volume	Total
10+05.94	28.35	0.00	0.00	10+05.94	0.00	0.00	0.00	10+05.94	0.19	0.00	0.00
10+50	17.00	36.97	36.97	10+50	0.00	0.00	0.00	10+50	4.71	3.97	3.97
11+00	16.48	31.00	67.97	11+00	0.00	0.00	0.00	11+00	10.47	14.05	18.02
11+50	20.49	34.23	102.20	11+50	0.00	0.00	0.00	11+50	7.09	16.26	34.28
12+00	16.94	34.73	136.93	12+00	0.00	0.00	0.00	12+00	11.50	16.82	51.10
12+50	13.80	28.70	165.63	12+50	0.00	0.00	0.00	12+50	10.50	19.05	70.14
13+00	13.92	25.67	191.30	13+00	0.00	0.00	0.00	13+00	7.07	15.95	86.09
13+05.70	13.67	2.89	194.19	13+05.70	0.00	0.00	0.00	13+05.70	9.66	1.89	87.98
13+21.77	14.16	8.31	202.50	13+21.77	0.00	0.00	0.00	13+21.77	15.67	8.14	96.12
13+32.15	15.58	5.88	208.38	13+32.15	0.00	0.00	0.00	13+32.15	9.29	5.22	101.34
13+46.86	19.11	10.03	218.41	13+46.86	0.00	0.00	0.00	13+46.86	4.75	4.22	105.57
13+61.57	17.98	11.04	229.45	13+61.57	2.44	0.73	0.73	13+61.57	2.73	2.35	107.92
13+76.57	33.87	14.40	243.86	13+76.57	0.81	0.90	1.63	13+76.57	1.15	1.08	109.00
13+96.57	13.22	17.44	261.30	13+96.57	0.00	0.30	1.93	13+96.57	24.17	9.38	118.37
14+11.57	0.00	3.67	264.97	14+11.57	0.00	0.00	1.93	14+11.57	0.00	6.71	125.09



BROOKVIEW CIR

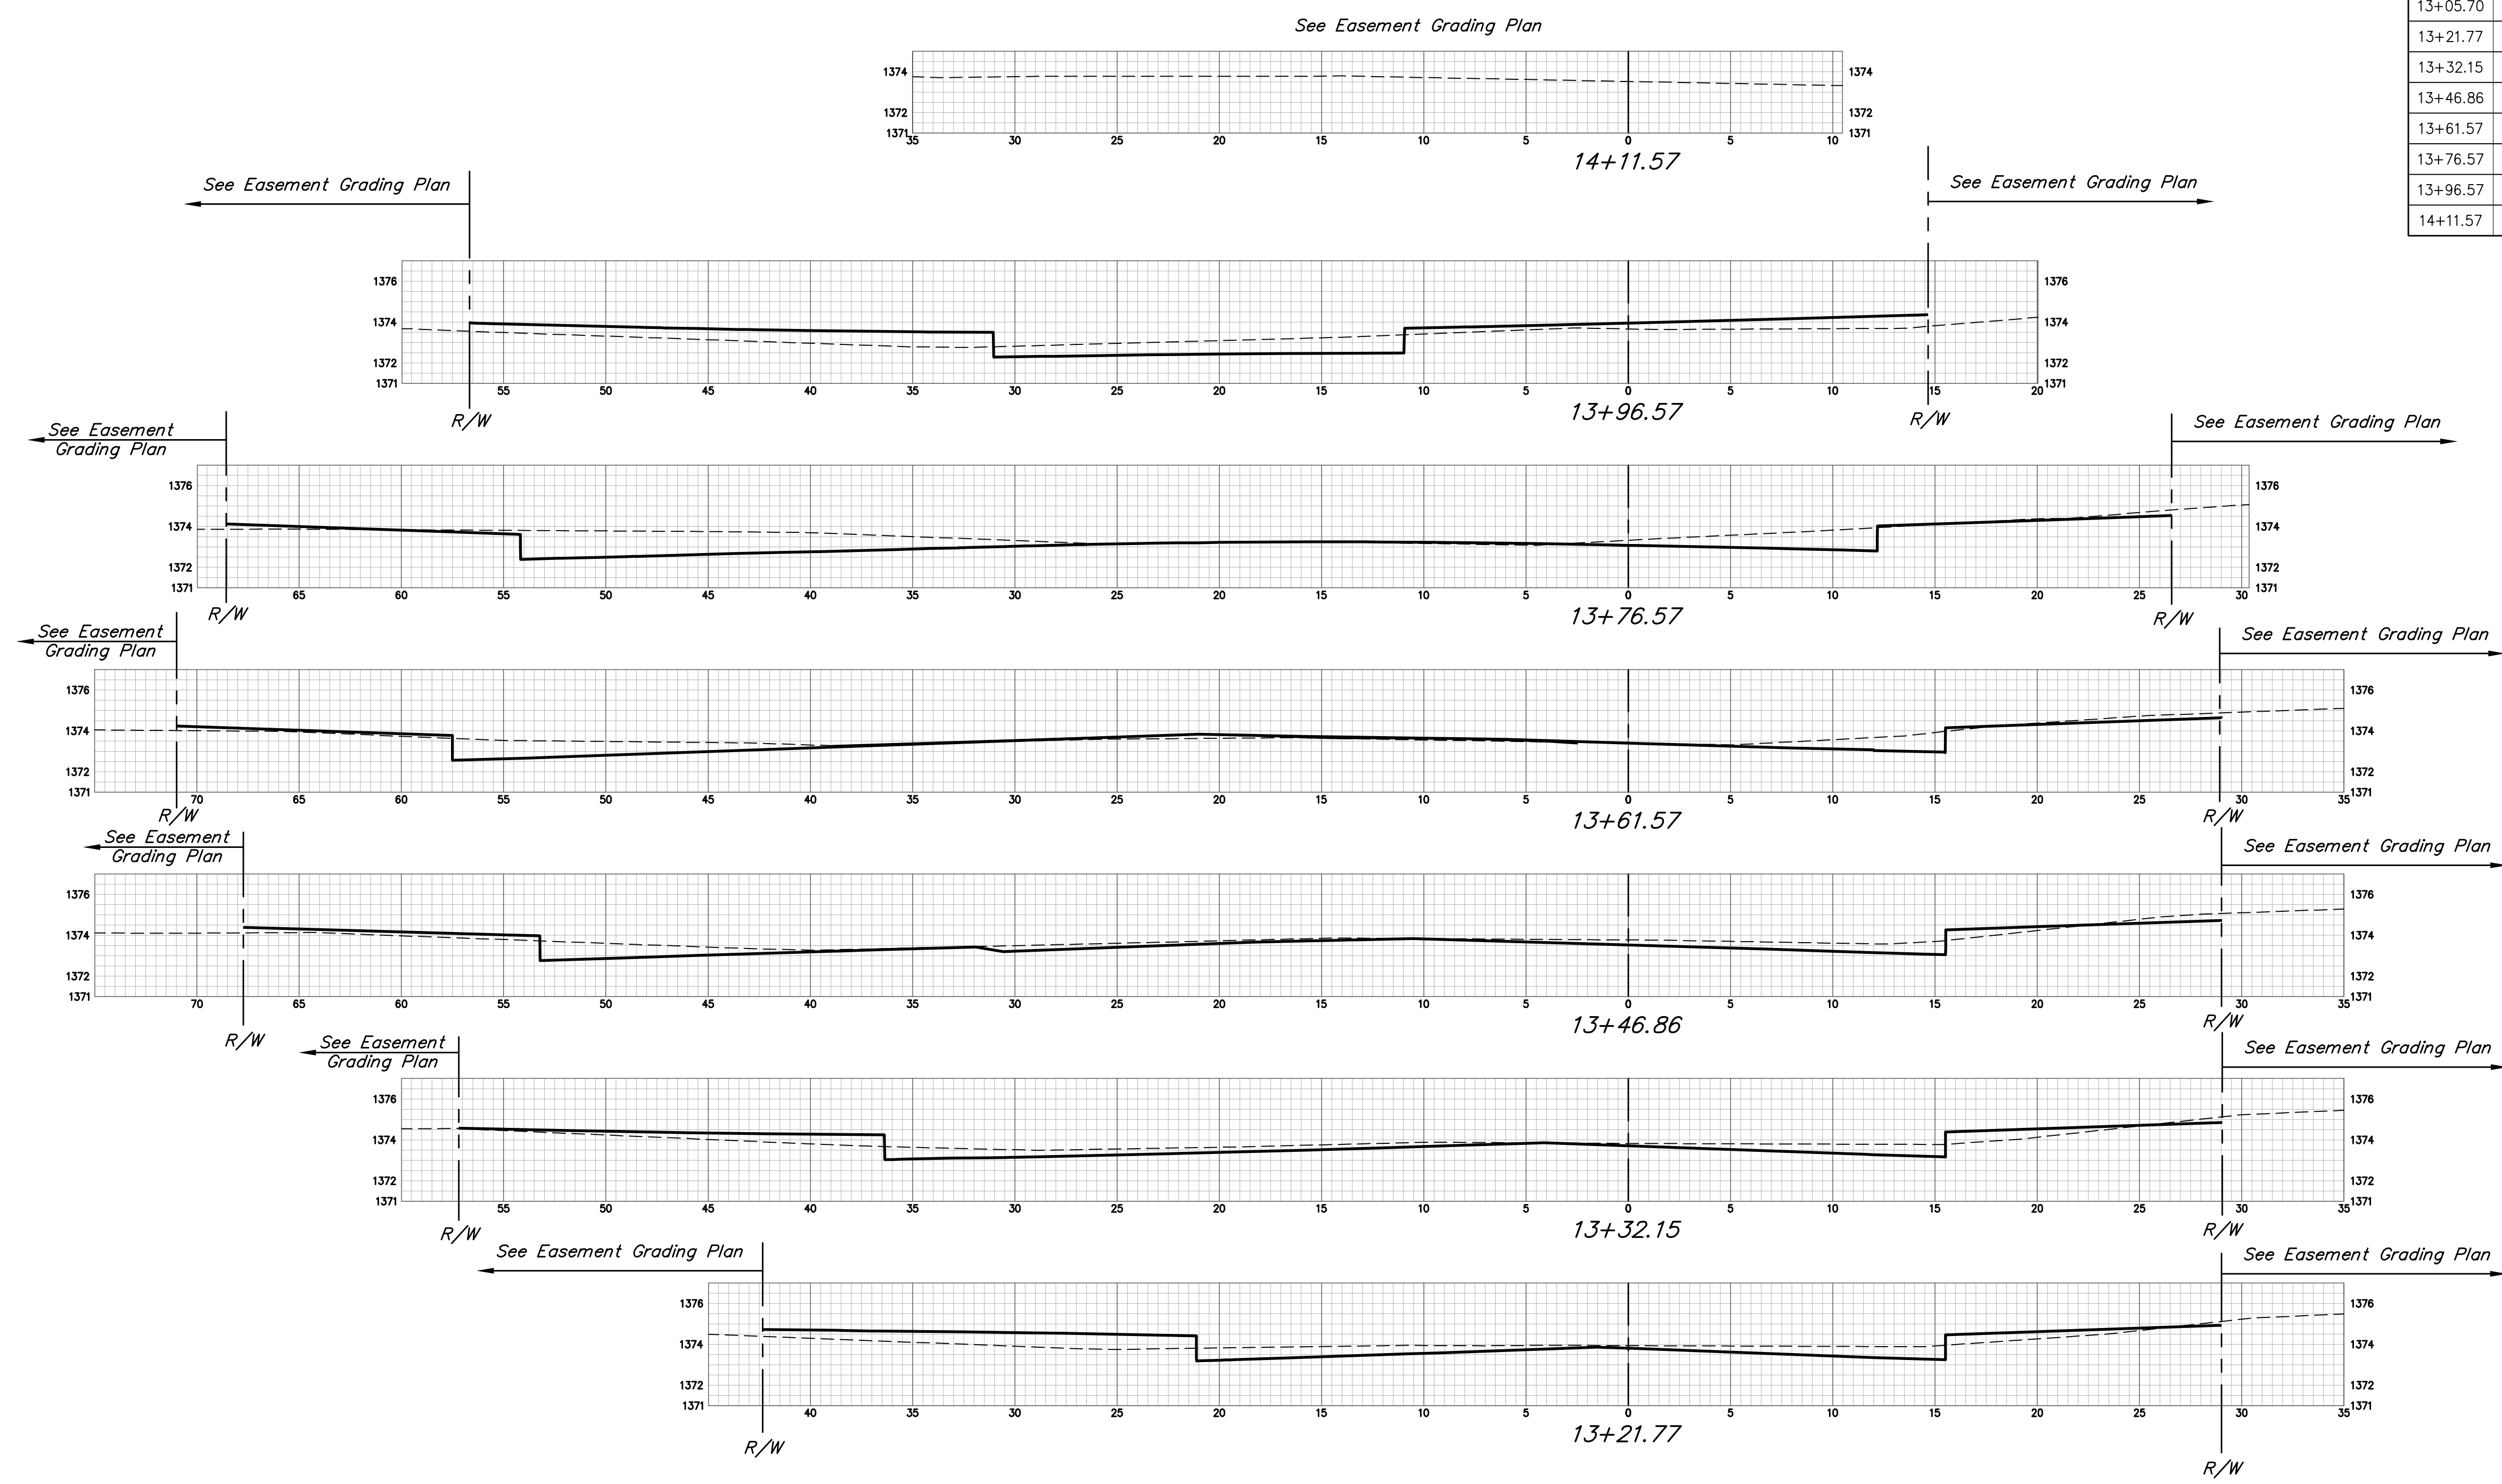

**B**

**BAUGHMAN  
COMPANY**

315 Ellis St.  
Wichita, KS 67211  
316-262-7271  
BaughmanCo.com

BROOKFIELD ADDITION  
PHASE 3B  
**EARTHWORK  
CROSS  
SECTIONS**

Sta. 13+21.77 to Sta. 14+11.57  
Street Paving Improvements

PROJECT NUMBER:  
472-2020-085626

DESIGN: AEG DRAWN: JAK

DATE: Sep. 2, 2021

SHEET OF  
**21 24**

File: C:\Projects\Brookfield Addition - 16-04-P190\Engineering\Phase 3B\STR\_21-05-E906.dwg