


DSNR: PMM OPER: BJS SCALE: 1"=20' 1/1999/99687/001/ROCK1MRK.DGN 6-27-2000

PROJECT NO.	SHEET NO.	TOTAL SHEETS
472-83222	13	32

SCALE: 1"=20'

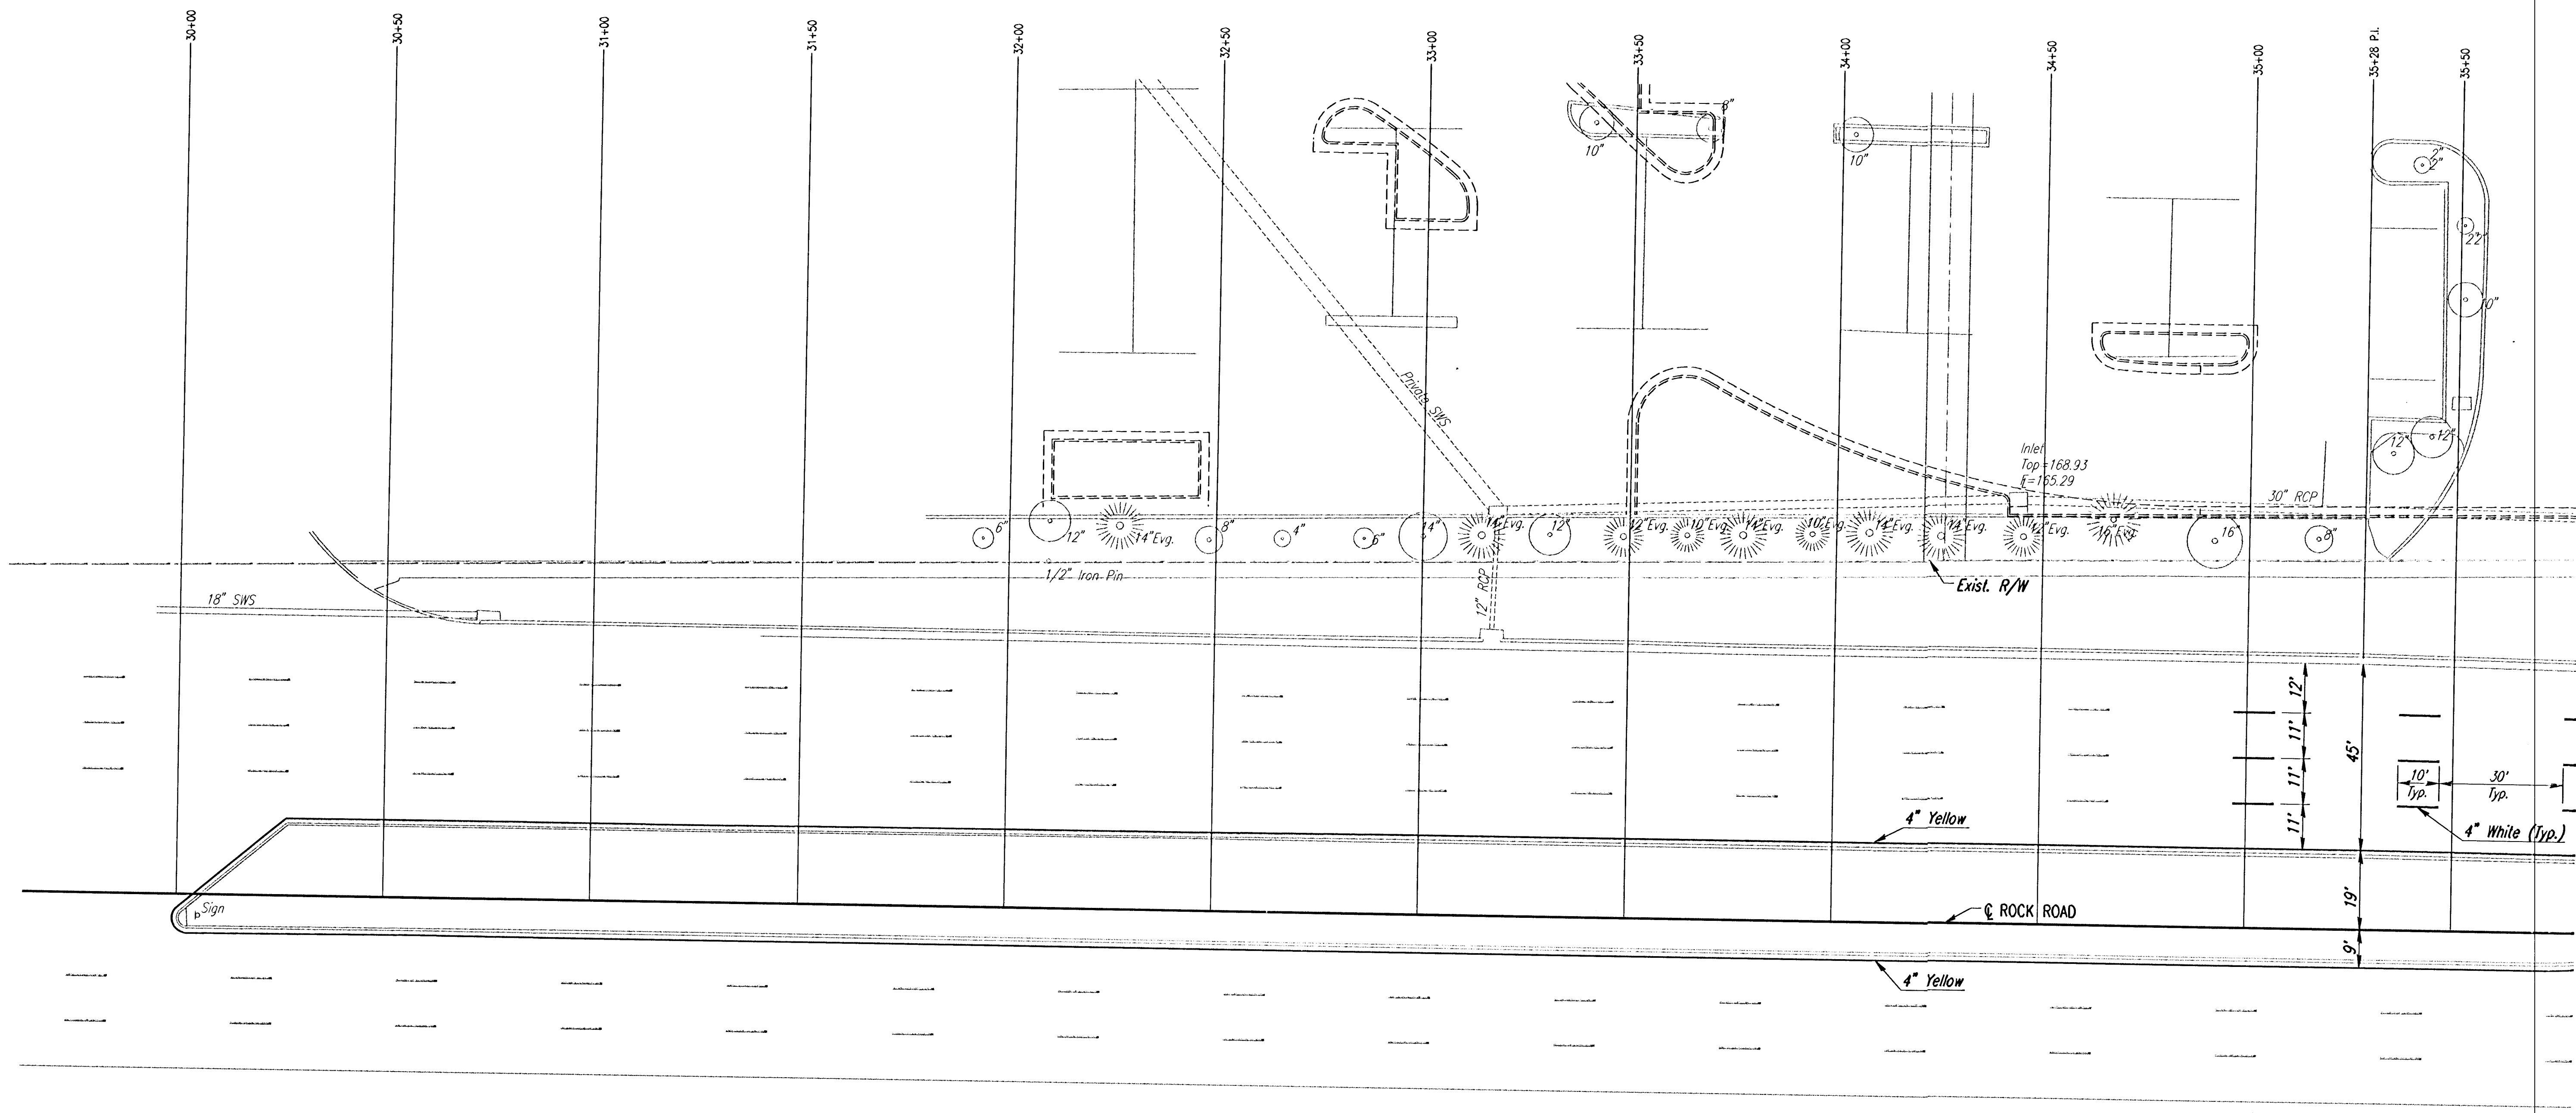

Words & Symbols shall conform to the latest edition of "Standard Alphabets for Highway Signs and Pavement Markings" printed by the U.S. Department of Transportation, Federal Highway Administration.

SUMMARY OF PAVEMENT & SYMBOL MARKINGS							
LOCATION	4" DOTTED WHITE EXTENSION LINE	4" SOLID YELLOW LINE	4" BROKEN WHITE LANE LINE	4" SOLID WHITE LANE LINE	24" SOLID WHITE STOP LINE	↶	↷
ROCK ROAD	262	2,638	2,560	1,180	107	2	13

RECAPITULATION OF QUANTITIES		
ITEM	TOTAL	UNITS
PAVT. MARKING (THERMOPLASTIC)(WHITE)(4")	4,002	LIN. FT.
PAVT. MARKING (THERMOPLASTIC)(WHITE)(24")	107	LIN. FT.
PAVT. MARKING (THERMOPLASTIC)(YELLOW)(4")	2,638	LIN. FT.
PAVT. MARKING SYMBOL (THERMOPLASTIC)(WHITE)	15	EACH

Note: All Existing Marking which Conflict with the Proposed Plan shall be Removed. This work shall be Subsidiary to the Lump Sum Bid Item "Pavement Markings".

Unless Otherwise Noted, Dimensions are from & Stripe to & Stripe.

Revisions		By	Date
CITY OF WICHITA, KANSAS			
ROCK ROAD MARKING AND SIGNING PLAN STA.30+00 TO STA.35+50			
Professional Engineering Consultants, P.A. 303 S. TOPEKA • WICHITA, KANSAS 67202 316-262-2691 • FAX 316-262-3003			
Designed by	BER, PMM	Checked by	
Drawn by	BJS	Date	MARCH 2000
		Job No.	99687-1