
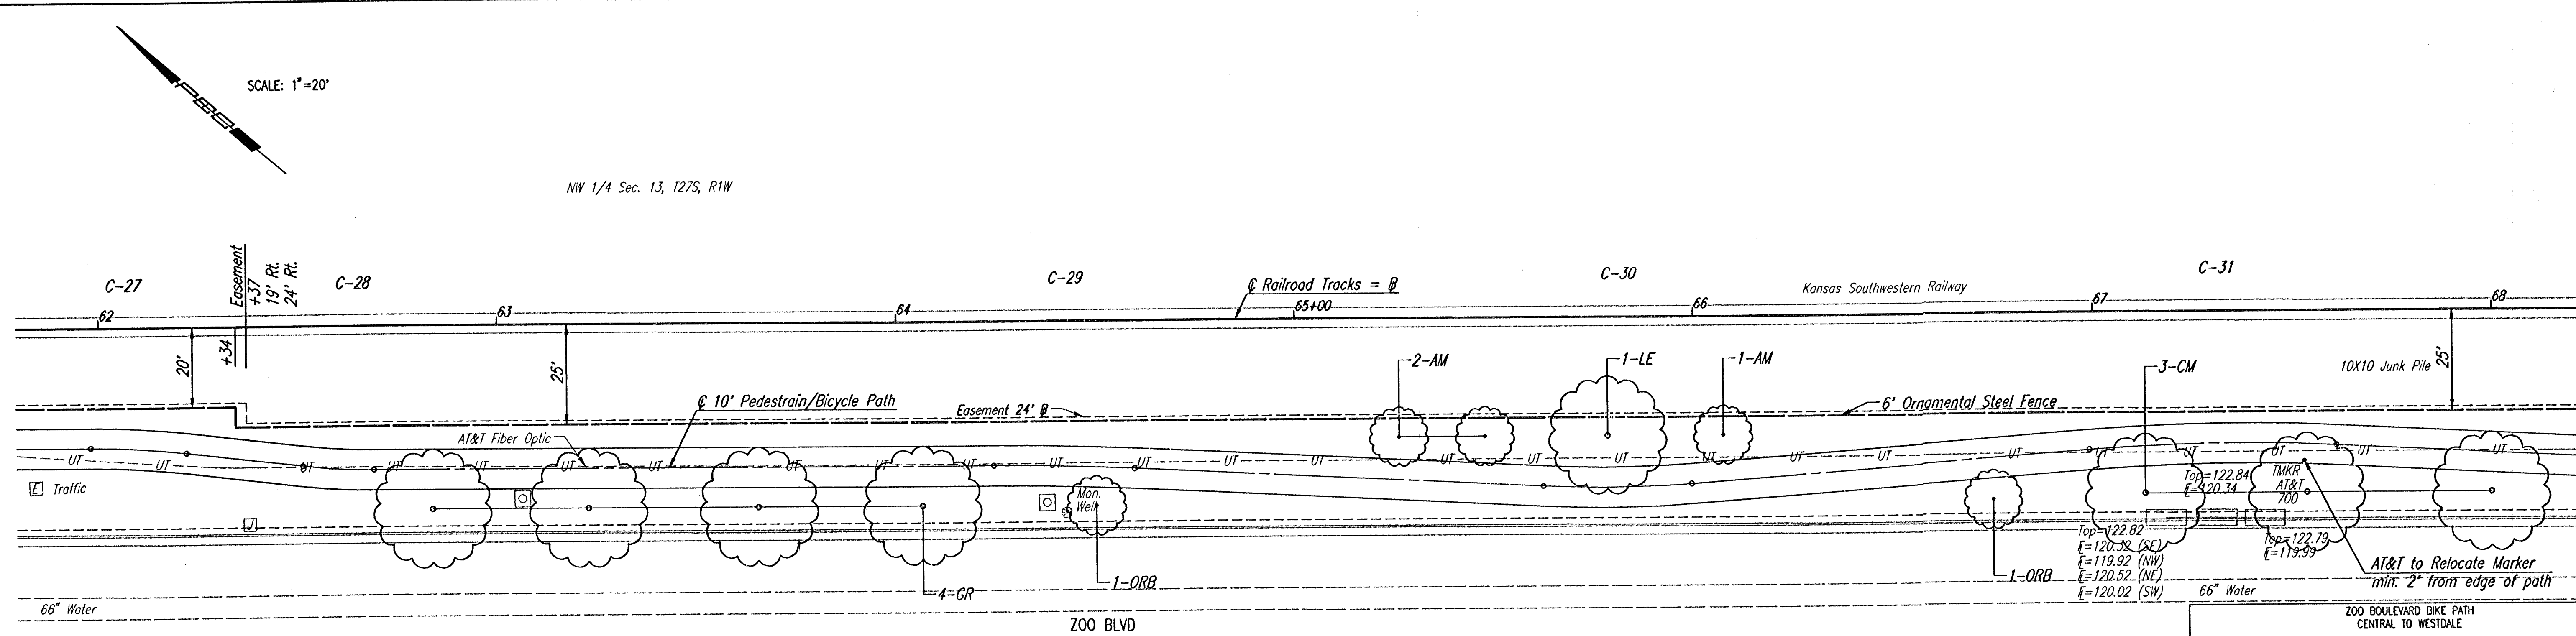


C CURVE ALIGNMENT DATA												
CURVE	C ARC LENGTH	RADIUS	DELTA	PC		STATION	PI		STATION	PT		STATION
				NORTHING	EASTING		NORTHING	EASTING		NORTHING	EASTING	
C-24	61.70	500.00	7°04'13"	1,692,402.99	1,633,318.39	56+68.20, 34.37'RT.	1,692,381.06	1,633,340.13	57+00.00, 32'RT.	1,692,356.61	1,633,359.02	57+30.86, 33.44'RT.
C-25	37.94	150.00	14°29'33"	1,692,274.16	1,633,422.71	58+34.93, 38.30'RT.	1,692,262.22	1,633,431.94	58+50.00, 41'RT.	1,692,252.29	1,633,443.96	58+64.92, 36.69'RT.
C-26	15.50	100.00	8°49'15"	1,692,228.89	1,633,470.51	59+00.38, 31.18'RT.	1,692,223.85	1,633,476.35	59+08.00, 31.18'RT.	1,692,217.97	1,633,481.35	59+15.72, 30'RT.
C-27	23.88	200.00	6°50'33"	1,692,002.83	1,633,664.17	61+98.05, 30'RT.	1,691,993.72	1,633,671.91	62+10.00, 30'RT.	1,691,983.75	1,633,678.52	62+21.88, 31.42'RT.
C-28	20.86	150.00	7°58'11"	1,691,959.21	1,633,694.77	62+51.10, 34.93'RT.	1,691,951.74	1,633,699.72	62+60.00, 36'RT.	1,691,944.70	1,633,705.70	62+78.98, 36'RT.
C-29	35.22	700.00	2°52'58"	1,691,826.47	1,633,806.17	64+24.39, 36'RT.	1,691,813.05	1,633,817.58	64+42.00, 36'RT.	1,691,799.07	1,633,828.29	64+59.59, 36.89'RT.
C-30	37.20	300.00	7°06'19"	1,691,717.38	1,633,890.92	65+62.41, 42.06'RT.	1,691,702.60	1,633,902.25	65+81.00, 43'RT.	1,691,689.33	1,633,915.33	65+99.58, 41.63'RT.
C-31	61.83	500.00	7°05'06"	1,691,618.23	1,633,985.39	66+99.14, 34.28'RT.	1,691,596.18	1,634,007.12	67+30.00, 32'RT.	1,691,571.62	1,634,025.96	67+60.92, 33.55'RT.

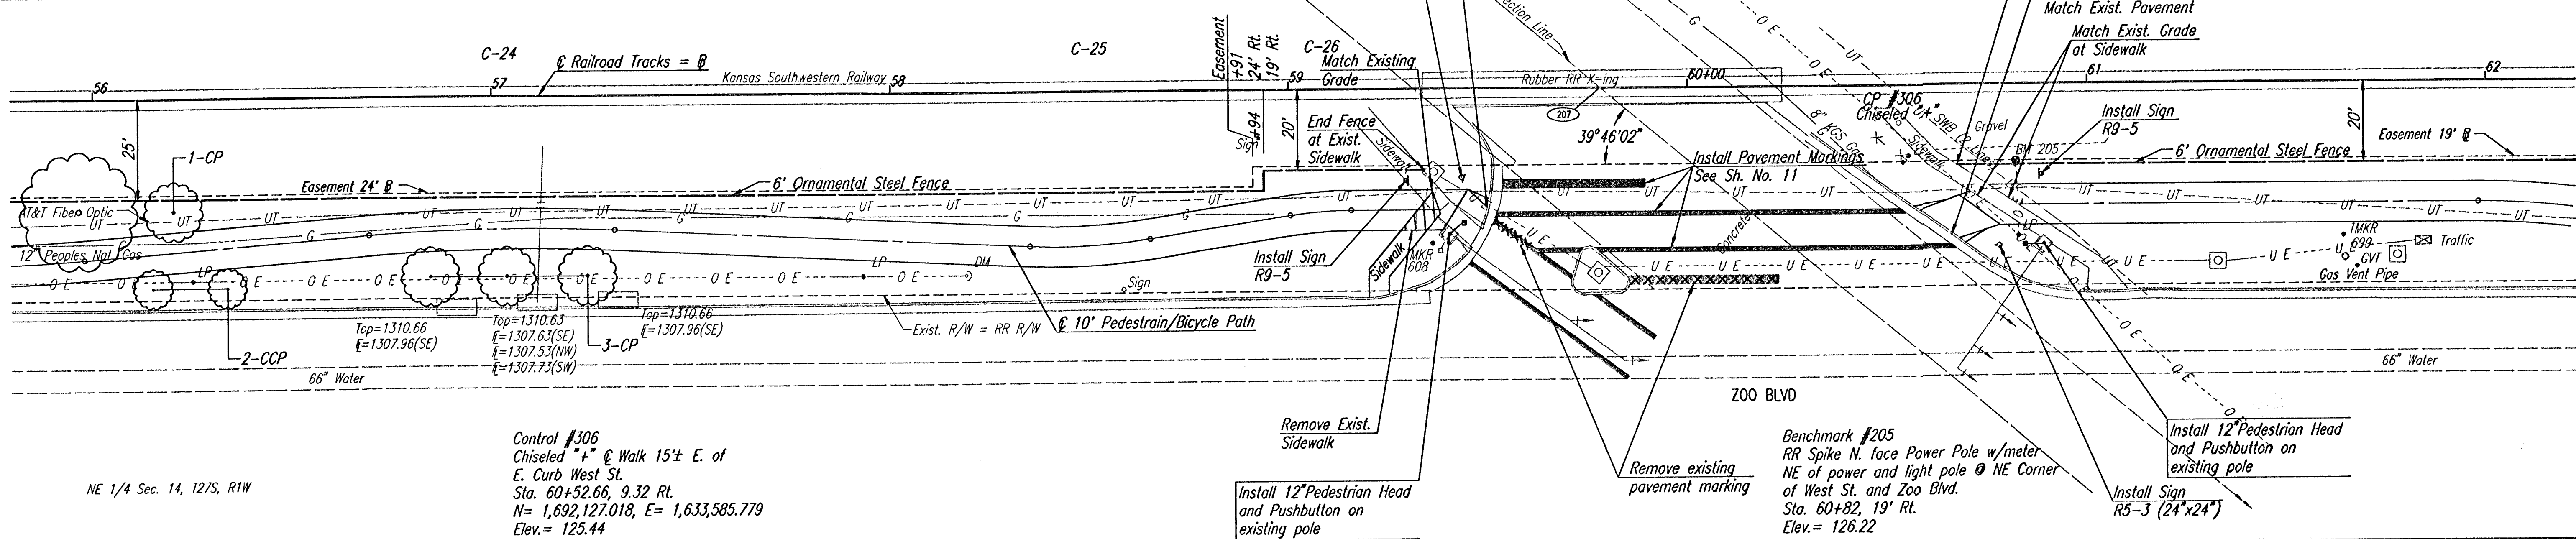

ZOO BOULEVARD
STA. 56+00.00 TO STA. 68+00.00

Professional Engineering Consultants, P.A.
303 S. TOPEKA • WICHITA, KANSAS 67202
316-262-2691 • FAX 316-262-3003

Designed by	RMH	Checked by	
Drawn by	DEP, SAD	Date	SEPTEMBER 2001 Job No. 96450-002

DSNR: SAD OPER: SAD SCALE: 1"=20.00
C:\1996\96450\002\SW66-68 09-04-2002 09:05:53 am