


BENCHMARKS


BM #1: Brass Plate on North
Hub Guard of R.C.B.C. 50' East of
NW Corner NE 1/2, Sec. 22, Twp.
26-S, R-1-E.
Elev. = 1371.83 (NGVD29)

BM #2: "X" cut on East Hub
Guard of R.C.B.C. 110' S. of the
SE Cor., SE 1/4, Sec. 22, Twp.
26-S, R-1-E.
Elev. = 1359.54 (NGVD29)

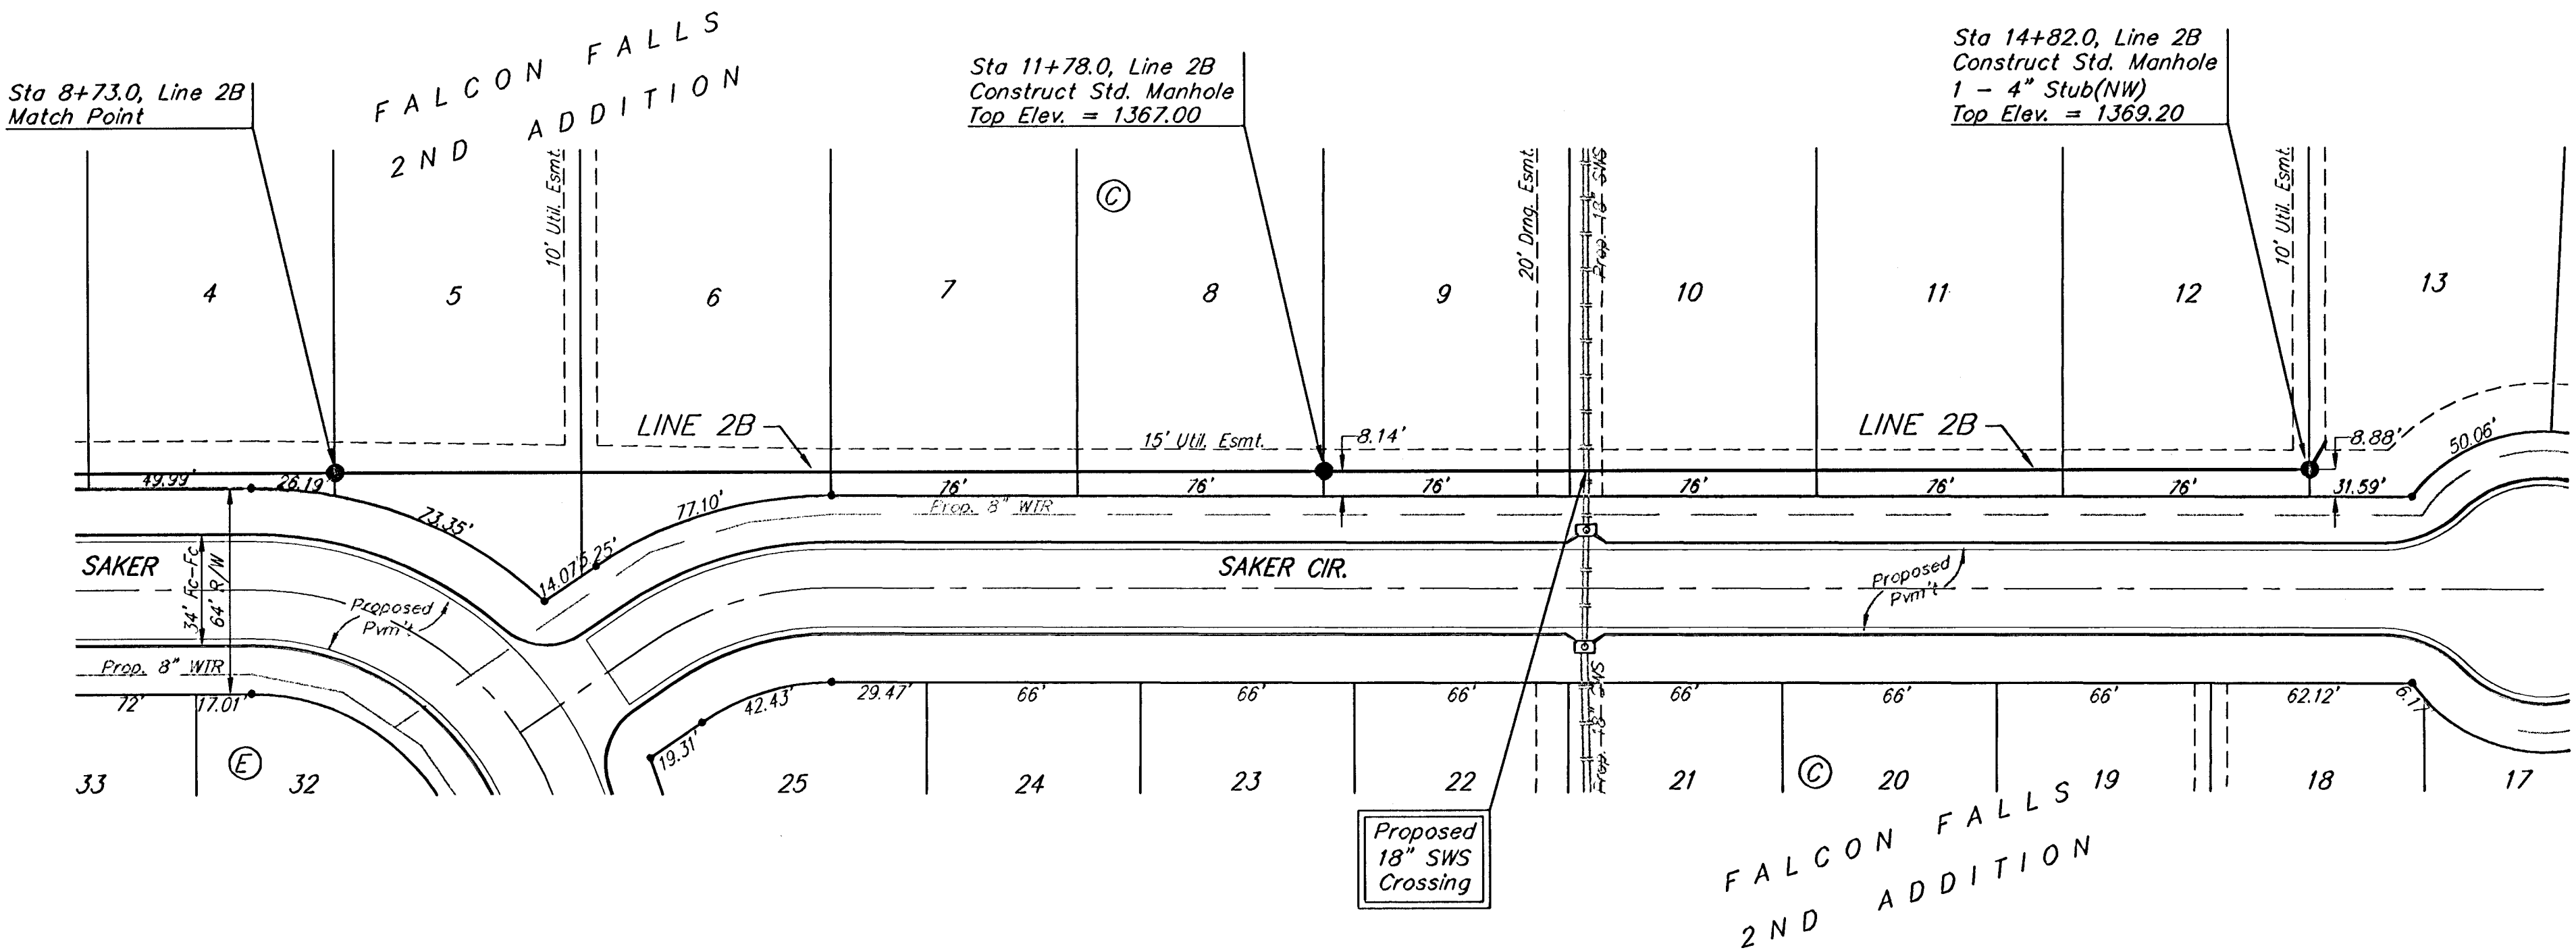

Scale: 1" = 40' Horizontal
1" = 5' Vertical
• = Iron

All excavation for Line 2B, from Station 8+73.0 to Station 14+82.0, shall be sand backfilled to within two feet of existing grade. The sand shall be vibrated and water jettied during backfilling. Cost shall be incidental to pipe cost.

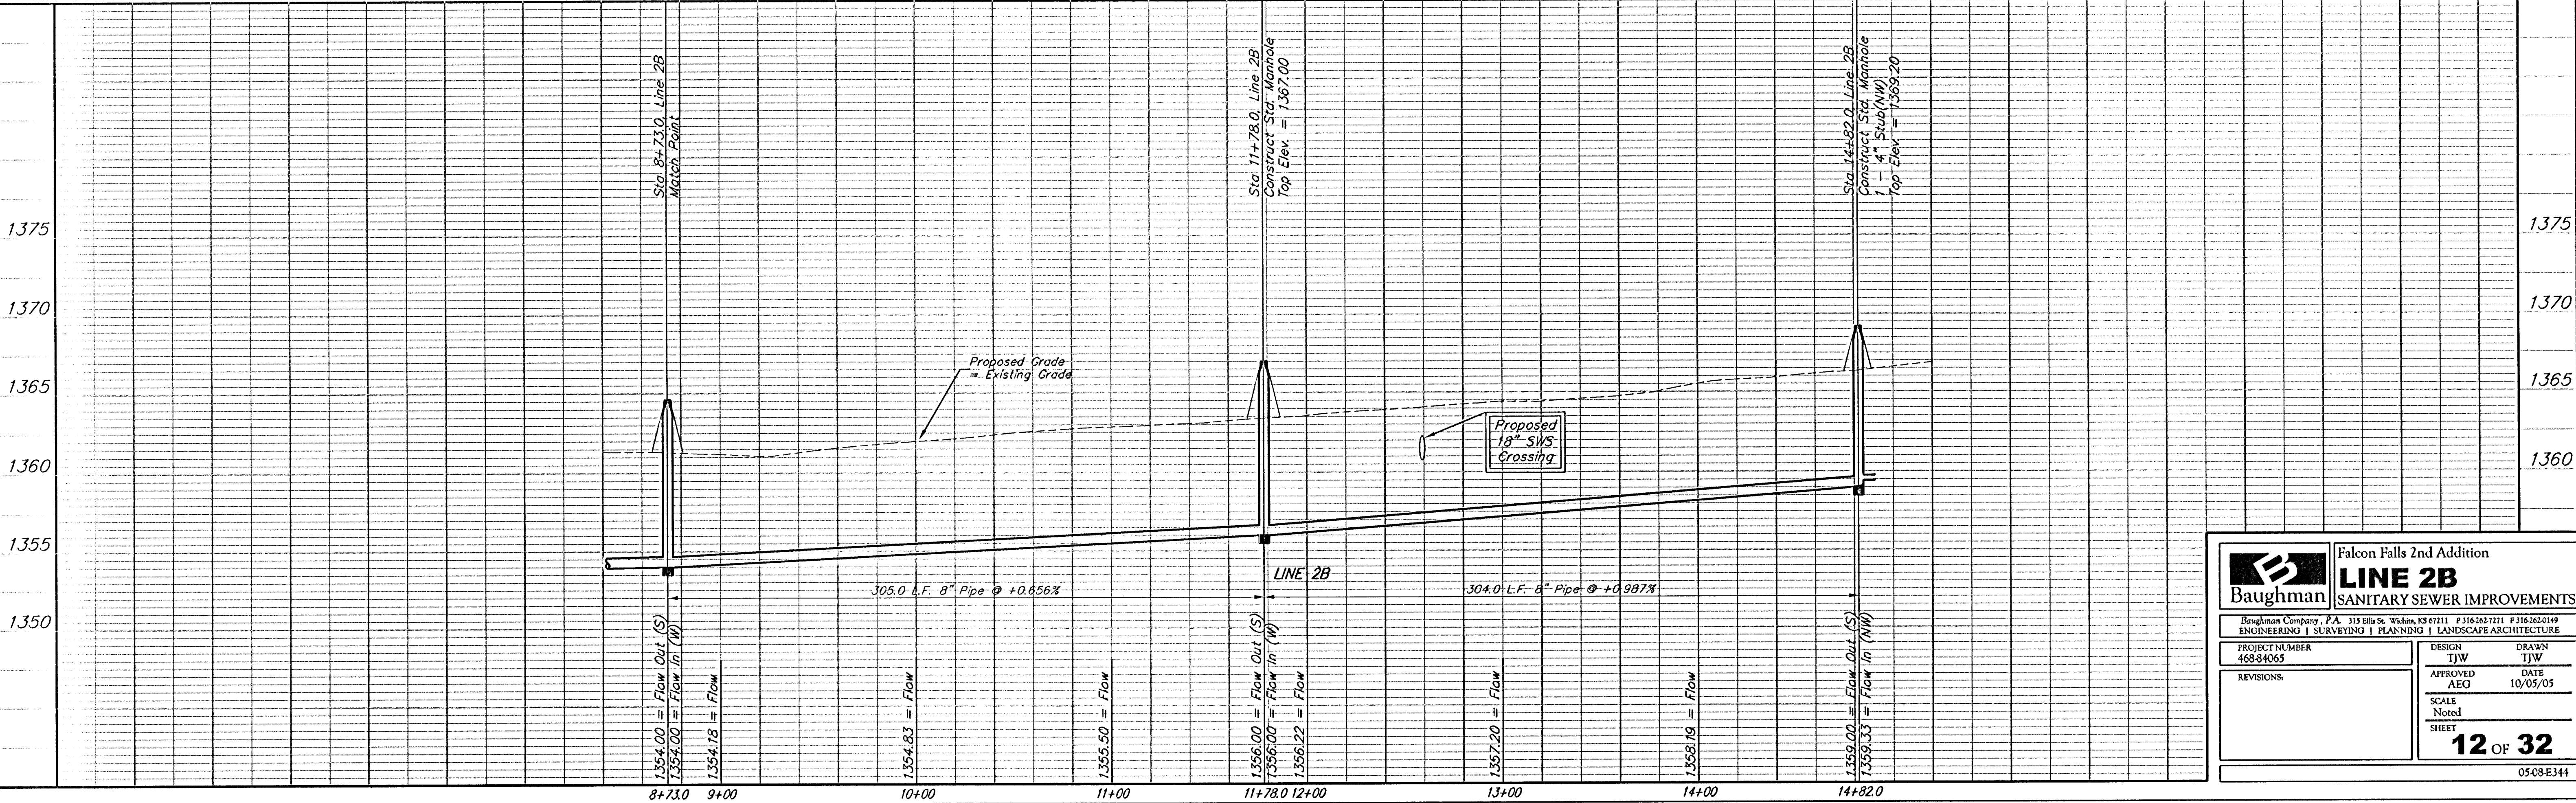

Baughman		Falcon Falls 2nd Addition	
LINE 2B		SANITARY SEWER IMPROVEMENTS	
Baughman Company, P.A. 315 Ellis St. Wilkes-Barre, PA 18701-1111 P 717-326-2111 F 717-326-2119			
ENGINEERING SURVEYING PLANNING LANDSCAPE ARCHITECTURE			
PROJECT NUMBER 468-84065		DESIGN TJW	DRAWN TJW
REVISIONS:		APPROVED AEG	DATE 10/05/05
		SCALE Noted	SHEET 12 OF 32
0508E344			