
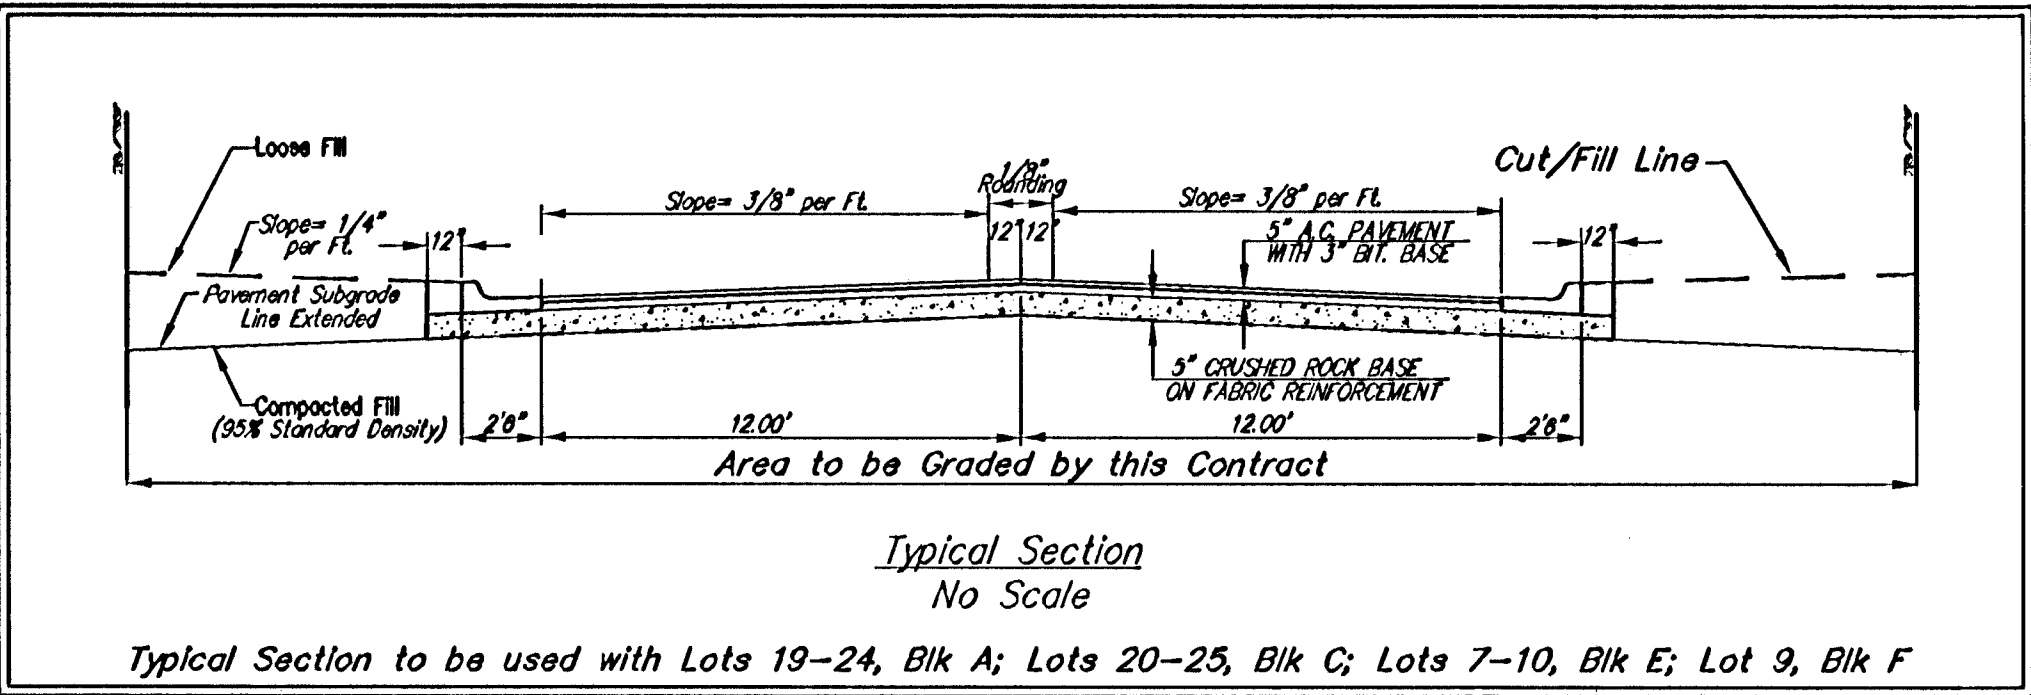
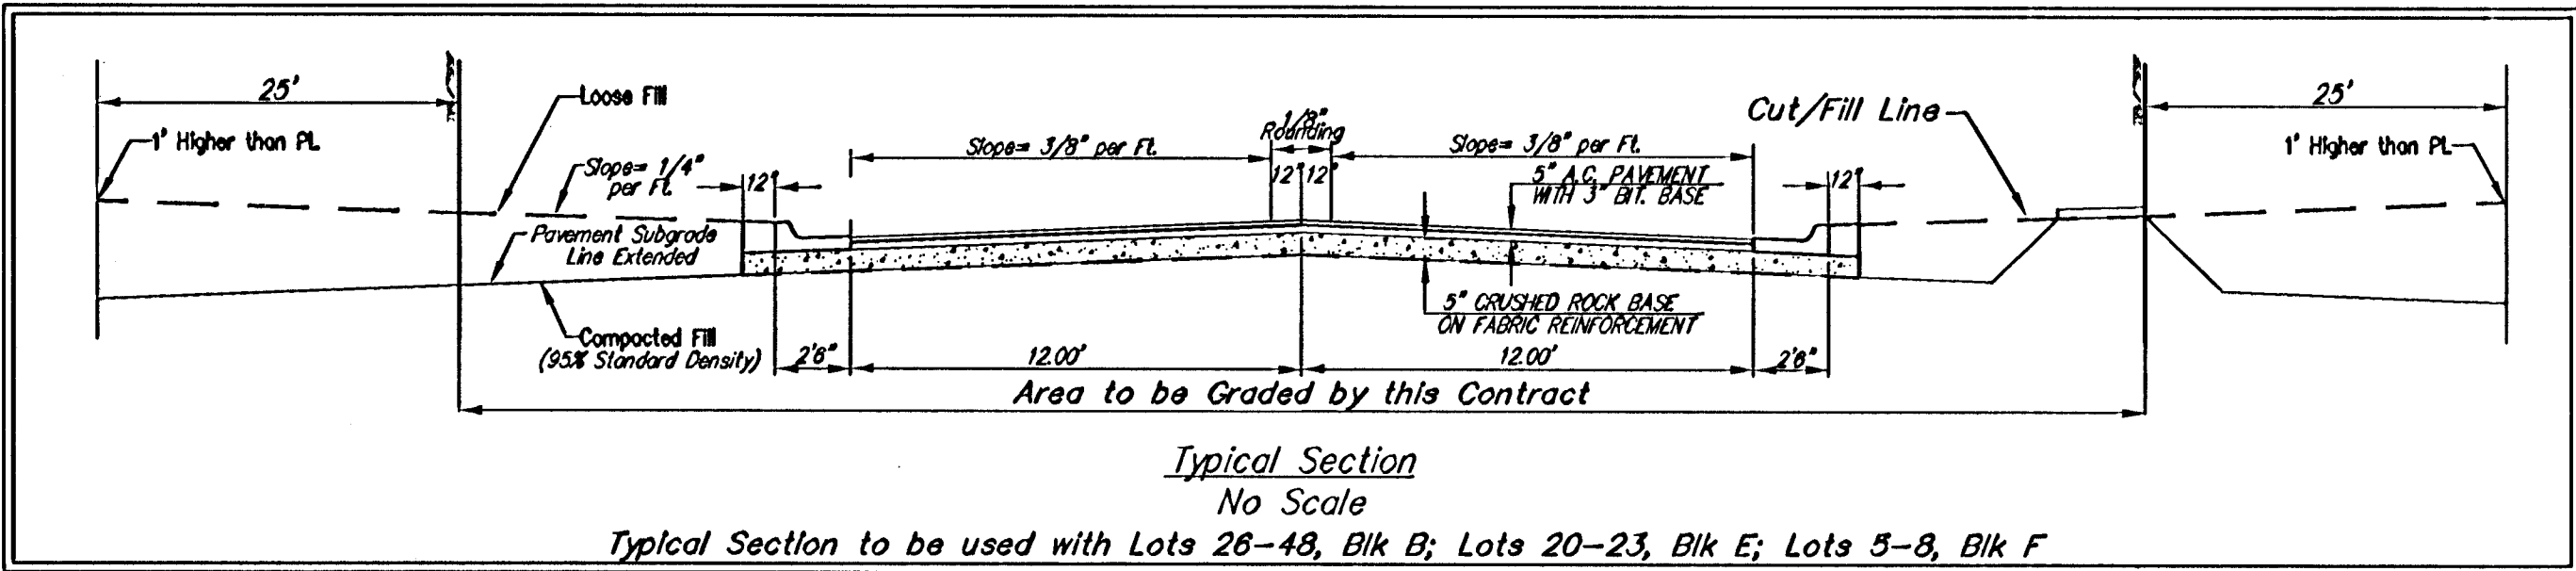


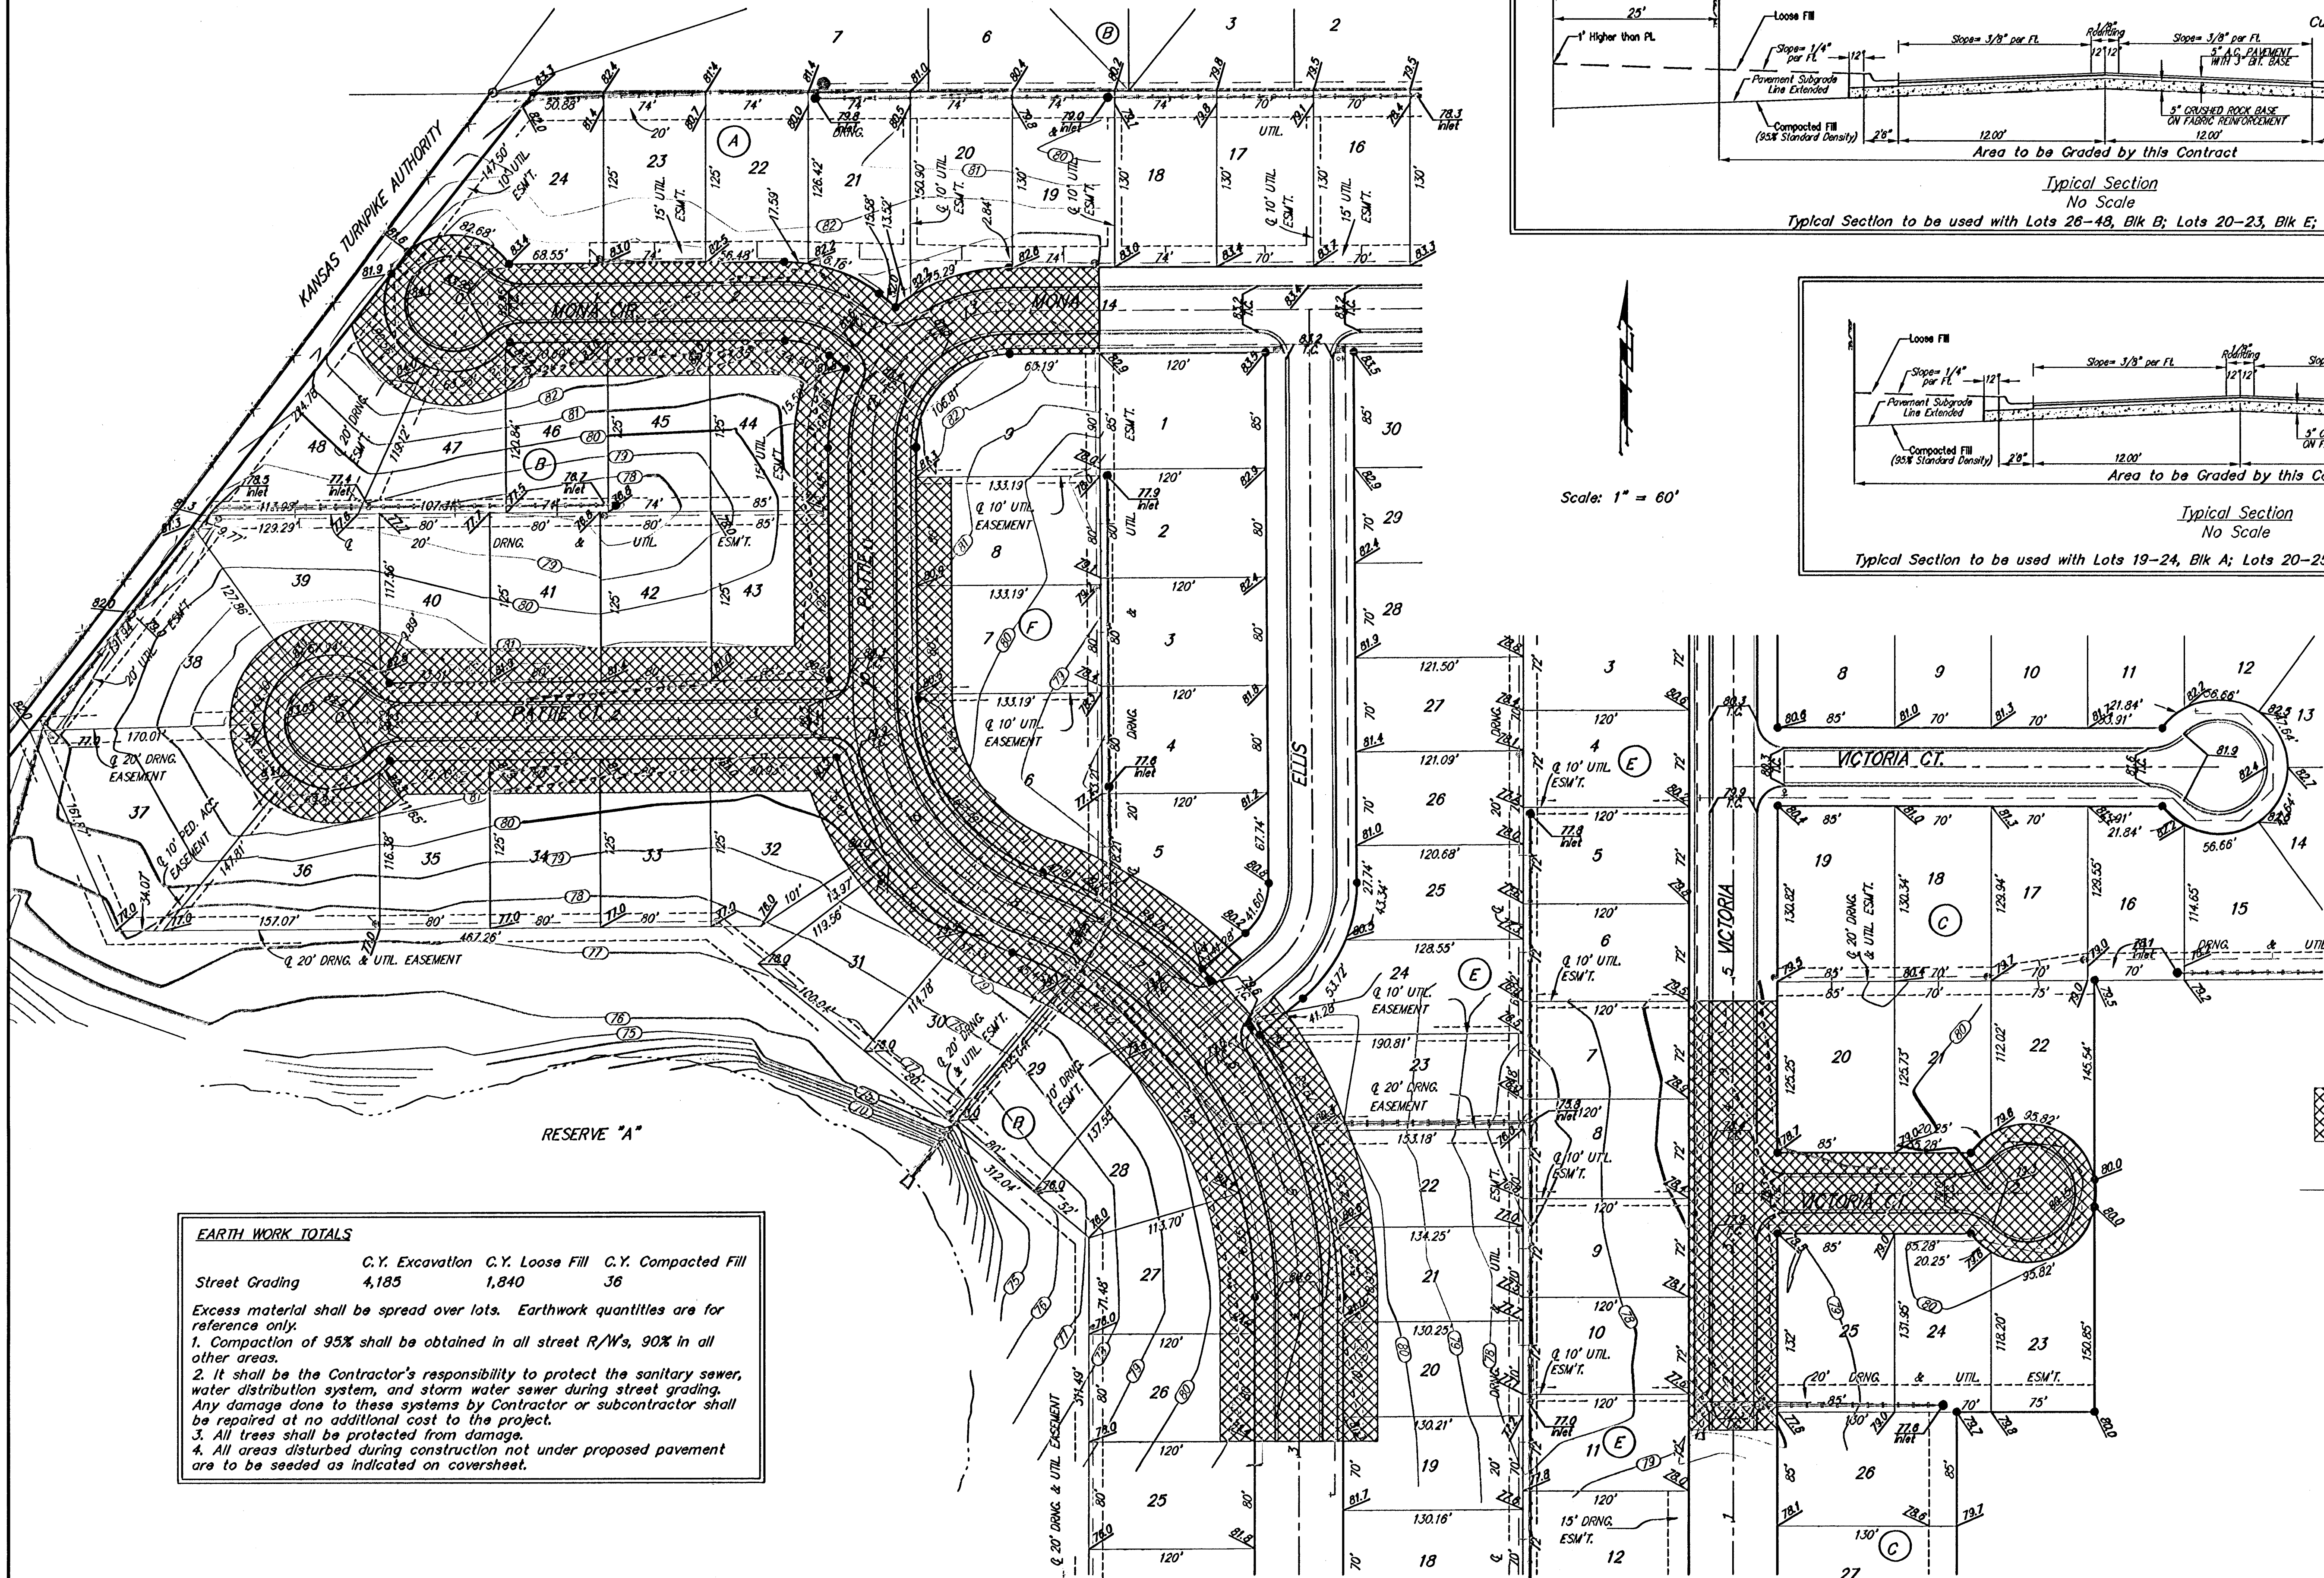

EARTH WORK TOTALS

	C.Y. Excavation	C.Y. Loose Fill	C.Y. Compacted Fill
Street Grading	4,185	1,840	36

Excess material shall be spread over lots. Earthwork quantities are for reference only.

1. Compaction of 95% shall be obtained in all street R/Ws, 90% in all other areas.
2. It shall be the Contractor's responsibility to protect the sanitary sewer, water distribution system, and storm water sewer during street grading. Any damage done to these systems by Contractor or subcontractor shall be repaired at no additional cost to the project.
3. All trees shall be protected from damage.
4. All areas disturbed during construction not under proposed pavement are to be seeded as indicated on coversheet.

Area to be graded

Existing Grade

Baughman

RIVENDALE ADDITION - PHASE II

STREET GRADING PLAN

Engineering Company, P.A. 315 Elm & Walnut, St. Louis, MO 63101 P: 314.241.7771 F: 314.241.7772

ENGINEERING | SURVEYING | PLANNING | LANDSCAPE ARCHITECTURE

PROJECT NUMBER
472-83867

DESIGN
TMS

REVISIONS

APPROVED
DATE
02/05

SCALE
AS SHOWN

SHEET
13 OF 28

Rivendale/Phase II/StreetGrade

05-01-E138