

**EROSION CONTROL PLAN
LEGEND**
(Installation Details Found in the SMP2 Plan)

- LIGHT STONE RIP-RAP
- DROP INLET PROTECTION
- CURB INLET PROTECTION
- STRAW BALE BARRIERS
- SILT FENCING
- EARTH DIKES
- VEGETATED AREA LEFT UNDISTURBED

NO SCALE

EROSION CONTROL MEASURE	UNITS	QUANTITY
SILT FENCE	L.F.	0
RIPRAP	S.Y.	0
DROP INLET BARRIER	EA.	1
CURB INLET BARRIER	EA.	2
STRAW BALE DITCH CHECK	EA.	0
TRENCH & BERM	L.F.	420
CURLEX	S.Y.	0
POND E.C. BLANKET	S.Y.	0
Construction Entrance	EA.	1


QUANTITIES ARE FOR INFORMATION ONLY!
CONTRACTOR SHALL VERIFY QUANTITIES PER
FINAL BID QUANTITY SHEET.

Install one construction
entrance onto existing
paved roadway per detail,
sheet 13.

NOTE: Contractor shall remove
& replace existing erosion
control measures as
necessary for construction.
Contractor shall be required to
maintain all on-site erosion
control items until final
acceptance by the City of
Wichita.

Remove trees only as
necessary for sanitary sewer
construction and only with
permission of Developer or
Baughman Co. Cost of
removal to be incidental to
lump sum bid item "Site
Clearing & Restoration".

Trench & Berm Detail
(No Scale)

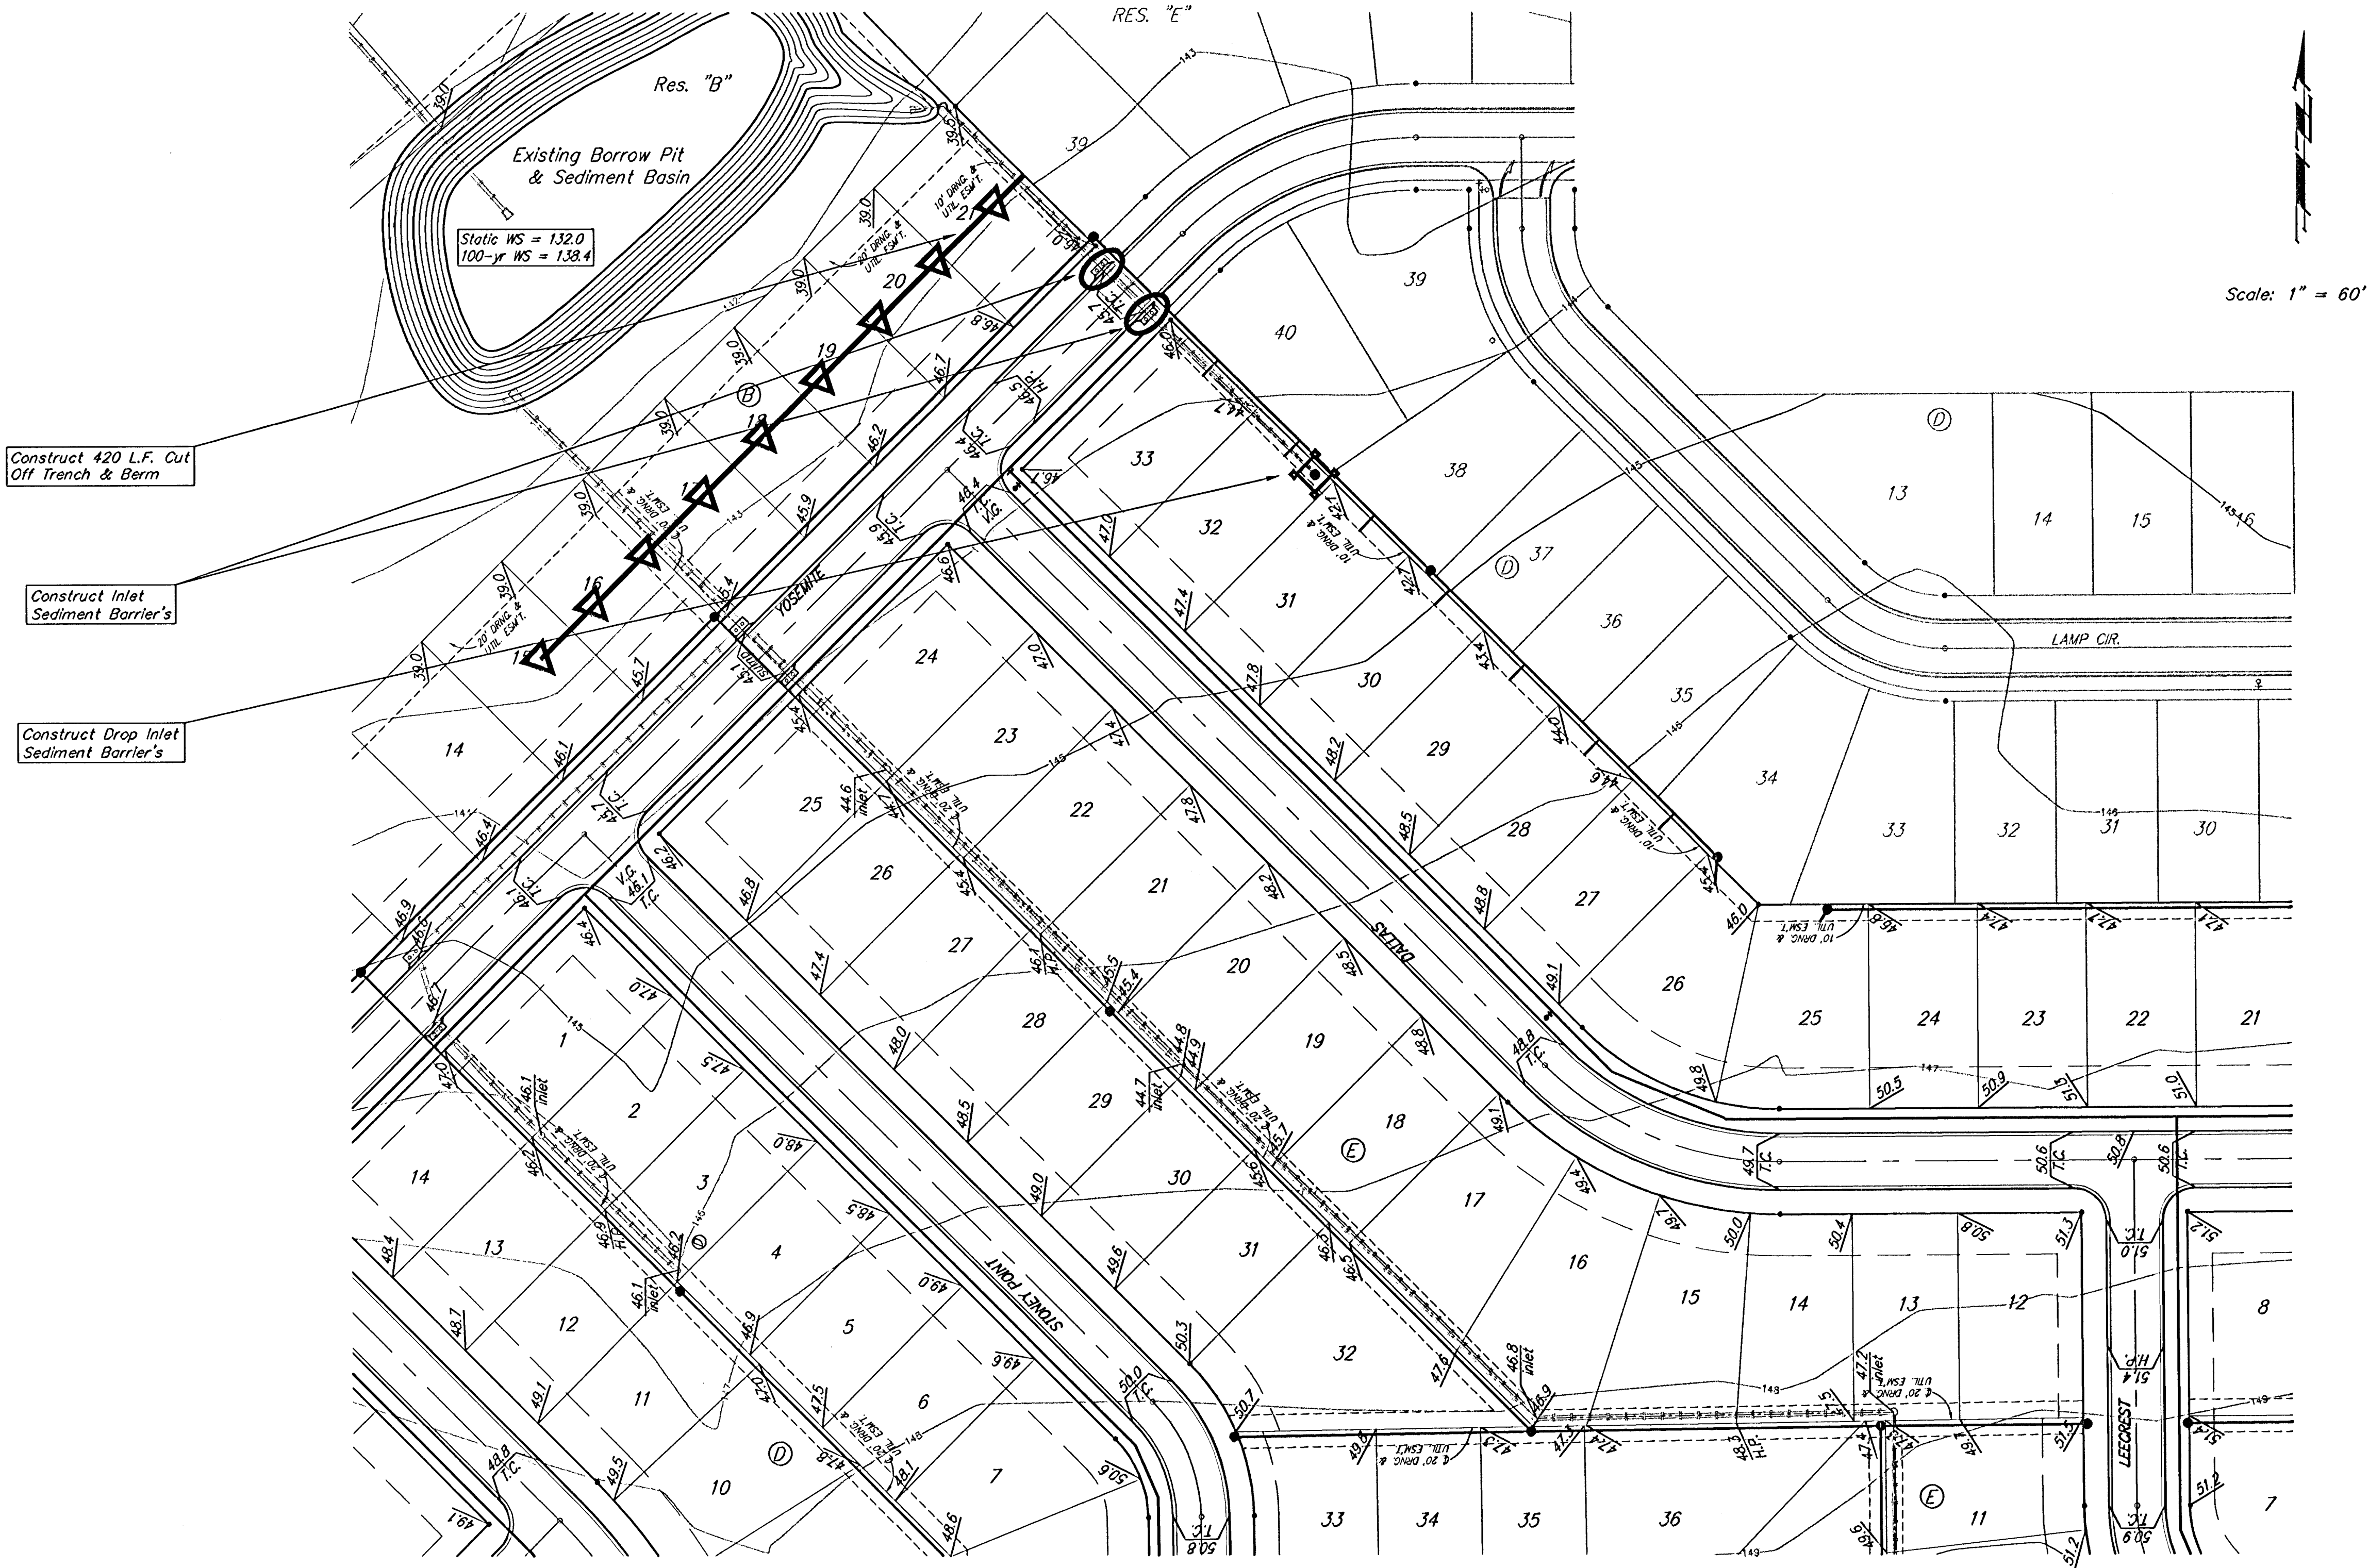

Baughman

SOUTHERN RIDGE 3RD ADDITION - PH. 1

**EROSION
CONTROL PLAN**

SANITARY SEWER IMPROVEMENTS

Baughman Company, P.A. 313 Ella St. Wichita, KS 67111 P 3162627271 F 3162624149

ENGINEERING | SURVEYING | PLANNING | LANDSCAPE ARCHITECTURE

PROJECT NUMBER 468-83965	DESIGN TJW	DRAWN TJW
REVISIONS	APPROVED AEG	DATE 07/05
SCALES Noted		SHEET

8 OF 13

Southern Ridge 3rd\SS\SSSECplan.dwg 0501-E149