PAVING PLANS FOR PHASE 3

REED'S COVE ADDITION

AN ADDITION TO THE CITY OF WICHITA
SEDGWICK COUNTY, KANSAS

PROJECT NO. 472-83771

JAMES L. ARMOUR, CITY ENGINEER

OCA - 765940

GENERAL NOTES

1. UNLESS SHOWN OR STATED OTHERWISE ON THESE DRAWINGS, MATERIALS AND CONSTRUCTION SHALL BE IN ACCORDANCE WITH CITY OF WICHITA CONCRETE PAVEMENT AND ASPHALTIC CONCRETE PAVEMENT SPECIFICATIONS.

2. THE CONTRACTOR SHALL BE RESPONSIBLE FOR PRESERVING PROPERTY IRONS. THE CONTRACTOR WILL BE REQUIRED TO RE-ESTABLISH ANY PROPERTY IRONS WHICH ARE DAMAGED OR DESTROYED BY HIS CONSTRUCTION OPERATIONS. SUCH IRONS SHALL BE RE-ESTABLISHED BY A LICENSED LAND SURVEYOR IN ACCORDANCE WITH STATE LAWS.

3. EXISTING UTILITIES AND THEIR LOCATIONS, AS SHOWN ON THE PLANS REPRESENT THE BEST INFORMATION OBTAINABLE FOR DESIGN. LOCATION INFORMATION HAS BEEN OBTAINED FROM THE VARIOUS UTILITY COMPANIES AND IS EITHER FROM COMPANY RECORD DRAWINGS OR COMPANY PROVIDED FIELD LOCATIONS. THE PLAN LOCATIONS SHOWN ARE NOT GUARANTEED. ADDITIONAL EXISTING UTILITIES MAY ALSO BE ENCOUNTERED.

4. CONTRACTOR WILL BE REQUIRED TO PROVIDE A MINIMUM ADVANCE NOTICE OF FORTY-EIGHT (48) HOURS TO UTILITY COMPANIES PRIOR TO STARTING ANY EXCAVATION AS FOLLOWS:

KANSAS ONE-CALL	1-800-344-7233 OR 687-2470 (LOCAL WICHITA)

THE CONTRACTOR MUST NOTIFY THE FOLLOWING IN CASE OF AN EMERGENCY:

COX COMMUNICATION	263-0661
WESTAR ENERGY	261-6512
SBC	1-800-870-8390
CITY OF WICHITA WATER & SEWER	262-6000
COOPERATIVE REFINERY PIPELINE	1-800-982-4112
KANSAS GAS SERVICE	832-3101

5. RUBBLE FROM THE REMOVAL OF MISCELLANEOUS STRUCTURES AND EXCESS EXCAVATION WHICH IS TO BE WASTED SHALL BE DISPOSED OF ON SITES TO BE PROVIDED BY THE CONTRACTOR. THESE SITES SHALL BE APPROVED BY THE ENGINEER AS TO SUITABILITY,APPEARANCE AND SITE LOCATION. LOCATIONS THAT, IN THE OPINION OF THE ENGINEER, WILL LEAVE AN UNSIGHTLY APPEARANCE WILL NOT BE APPROVED. ALL DISPOSAL SITES MUST BE APPROVED BY THE KANSAS DEPARTMENT OF HEALTH AND ENVIRONMENT. MATERIAL EITHER STOCKPILED OR DISPOSED OF IN A FLOOD PLAIN WOULD REQUIRE A KANSAS STATE BOARD OF AGRICULTURE PERMIT. ANY MATERIAL DUMPED IN WATERS OF THE UNITED STATES OR WETLANDS IS SUBJECT TO U.S. CORPS OF ENGINEERS PERMITTING REGULATIONS. ANY MATERIAL BURIED OR STOCKPILED BEYOND APPROVED CONSTRUCTION LIMITS WOULD REQUIRE ADDITIONAL ARCHAEOLOGICAL INVESTIGATIONS UNLESS BURIED IN A PREVIOUSLY APPROVED BORROW LOCATION.

6. A SAW CUT OF AT LEAST ONE-HALF THE DEPTH OF THE EXISTING SURFACE COURSES OR ONE-FOURTH THE DEPTH OF THE EXISTING TOTAL PAVEMENT THICKNESS SHALL BE PROVIDED AT LOCATIONS WHERE PROPOSED CONSTRUCTION ABUTS AN EXISTING SURFACE OR PAVEMENT FOR WHICH PARTIAL REMOVAL OF THAT SURFACE OR PAVEMENT IS REQUIRED. SAW JOINT TO FACILITATE REMOVAL WITHIN THREE (3) FEET OF EXISTING JOINTS WILL NOT BE PERMITTED AND FOR SUCH INSTANCES THE LIMITS OF REMOVAL SHALL EXTEND TO THE EXISTING JOINT. SUCH SAW CUTS WILL NOT BE PAID FOR DIRECTLY AND THIS COST SHALL BE CONSIDERED AS SUBSIDIARY TO THE REMOVAL OF SURFACE OR PAVEMENT.

7. CONTRACTOR SHALL SEED ALL DISTURBED AREAS WITH AN ANNUAL RYE GRASS AT A RATE OF 250LBS./ACRE.

8. THE CONTRACTOR SHALL COORDINATE WITH THE DEVELOPER AND ENGINEER ON THE REMOVAL OF TREES OUTSIDE OF BACK OF CURB. NO TREES SHALL BE REMOVED PRIOR TO A MEETING ON SITE WITH THE CITY, DEVELOPER AND ENGINEER.


9. EQUIPMENT AND CONSTRUCTION MATERIALS SHALL REMAIN OUT OF AND AWAY FROM TREE DRIPLINES SO AS TO NOT COMPACT THE ROOT ZONE OR DAMAGE THE TREE.

10. ALL TOPSOIL SHALL BE STRIPPED IN AREAS OF CUT/FILL AND STOCKPILED

11. TRANSITION CURB FROM FULL HEIGHT COMBINATION CURB AND GUTTER TO ROLL CURB AND GUTTER SHALL BE PAID FOR AS LINEAL FEET STANDARD CURB AND GUTTER (3 5/8" RL & 1 1/2")


LENGTH OF PROJECT	
29' BK.-BK.	954 FT.
EARTHWORK SUMMARY	
EXCAVATION	620 C.Y.
LOOSE FILL	1090 C.Y.
COMP. FILL	700 C.Y.
CONT. FURN.	1170 C.Y.

A 20% SHRINKAGE/EXPANSION FACTOR WAS FIGURED INTO THE EARTHWORK QUANTITIES ABOVE.

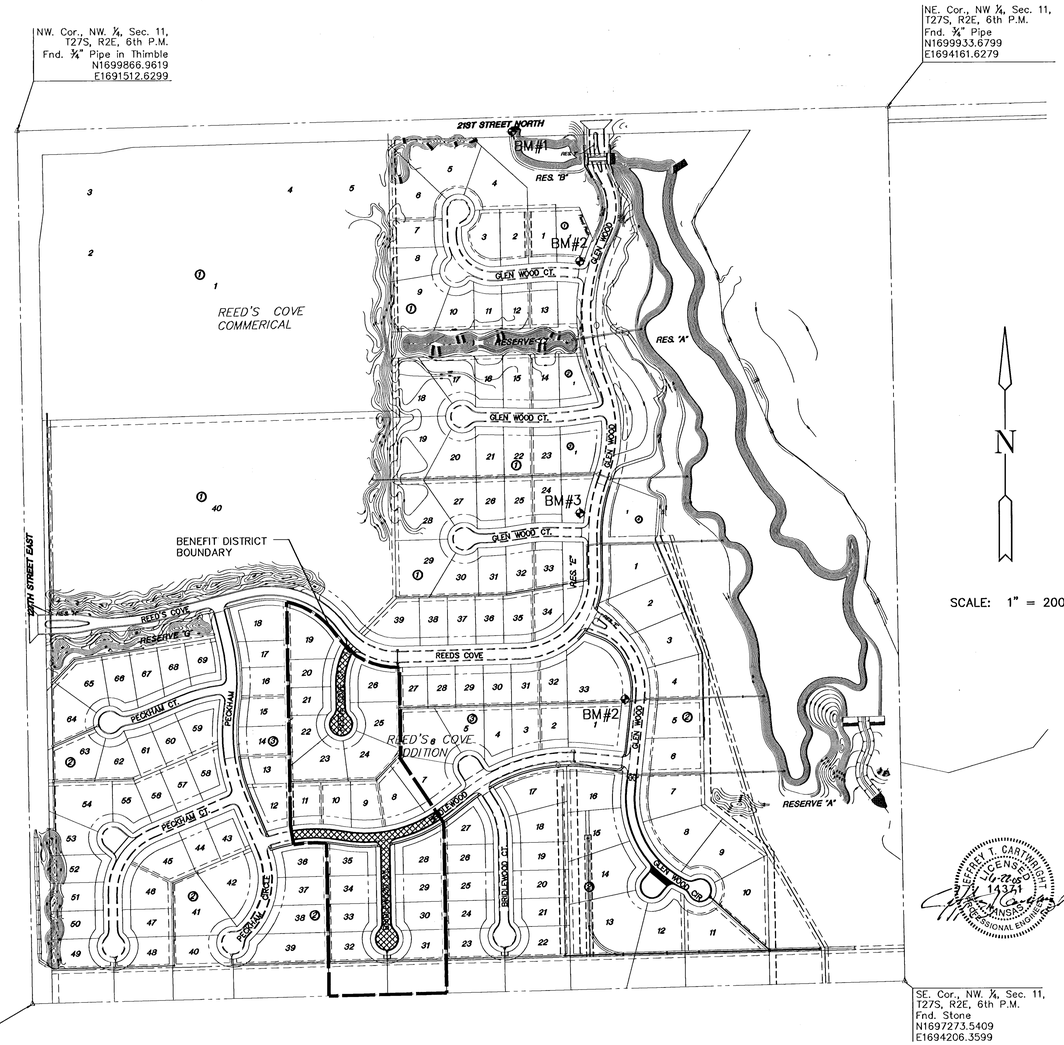

N

SCALE: 1" = 200'

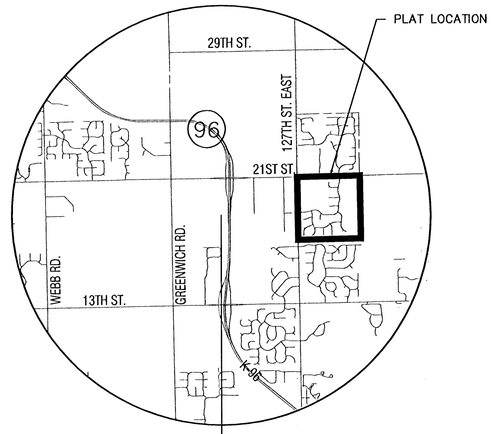

VICINITY MAP

INDEX TO DRAWINGS

SHEET NO.	DESCRIPTION
1	TITLE SHEET
2	TYP. PAVING SECTIONS
3	VALLEY GUTTER DETAILS
4	INLET HOOKUP DETAILS
5	SIGNING DETAILS
6	WHEELCHAIR RAMP DETAILS
7-9	PAVING PLANS
10-12	BMP DETAILS
13-18	CROSS SECTIONS
19	FINAL PLAT

BENCHMARK

BM 1 SQUARE CUT W. END OF S. HEADWALL OF RCB UNDER 21ST ST. N., 1506'+/- E. & 25' +/- S. OF NW COR SEC 11, T 27 S, R 2 E.
ELEV.=1351.77

BM 2 "T" POST 10'+/- N. & 10'+/- W. OF SE COR RES. "B", REED'S COVE.
ELEV.=1351.79

BM 3 "T" POST 30'+/- N. & 10'+/- W. OF SE COR RES. "D", REED'S COVE).
ELEV.=1362.66

STEVEN T. CARLWRIGHT LICENSED 14341 STATE OF KANSAS PROFESSIONAL ENGINEER

MKEC ENGINEERING CONSULTANTS
411 N. WEBB ROAD
WICHITA, KS. 67206
316 - 684 - 9600

REEDS COVE ADDITION - PHASE 3
PROJECT NAME

PAVING PLANS - PHASE 3
SHEET TITLE

DFL	DMU	GJA
DESIGN BY:	DRAWN BY:	CHECKED BY:
JUNE 2005	02121	1 / 19
DATE	JOB NO.	SHEET/OF

H:\CIVIL\02121\DWG\PAVING\PHASE 3\02121ET3.DWG