

PLAN	CHECKED	BY	DATE
	CHECKED		

PROFILE	CHECKED	BY	DATE
	CHECKED		

DSNR: OPER. ILS SCALE: 1"=40.00
C:\2004\04456\000\sspp02 11-29-2004 04:08:07 pm

N-51,703.7634, E-49,913.6337
Sta. 0+00.00*
Core existing concrete MH wall and
install outside drop connection.
Seal new 8" pipes to MH with approved
waterstop gasket and non-shrink
grout. Construct a minimum of
3' Reinforced Concrete Encasement
from MH wall. Reshape MH floor
to provide smooth flow. This work
shall be considered subsidiary
to the price bid for pipe in place.

Install 49.1 L.F.
8" Pipe

N-51,750.9540, E-49,900.1320
Sta. 0+49.1
Construct MH 5
Standard MH

N-51,750.2503, E-49,712.6613
Sta. 2+36.5
Construct MH 6
Standard MH

Install 187.4 L.F.
8" Pipe



SCALE:
PLAN: LAT. & LONG. 0 40 80
PROFILE: HORIZ. SAME AS ABOVE
VERT. 0 5

* PRIOR TO BEGINNING CONSTRUCTION, THE CONTRACTOR SHALL EXCAVATE THE EXISTING 8" PVC PIPE AT SANITARY SEWER STATION 0+00.00 TO VERIFY ITS HORIZONTAL AND VERTICAL LOCATION. THE PIPE LOCATION SHALL BE REPORTED TO THE ENGINEER SO THAT ANY NECESSARY PLAN MODIFICATIONS CAN BE MADE. ANY ADDITIONAL LABOR OR MATERIALS NECESSARY TO COMPLETE THE CONNECTION SHALL BE CONSIDERED SUBSIDIARY TO THE PROJECT.

SANITARY SEWER LINE NO. 3

FOR PLAT COORDINATES
SEE SHEET NO. 3

①
②
DENOTES SEWER SERVICE.
SEE SHEET NO. 7 FOR SEWER
SERVICE SCHEDULE AND DETAILS

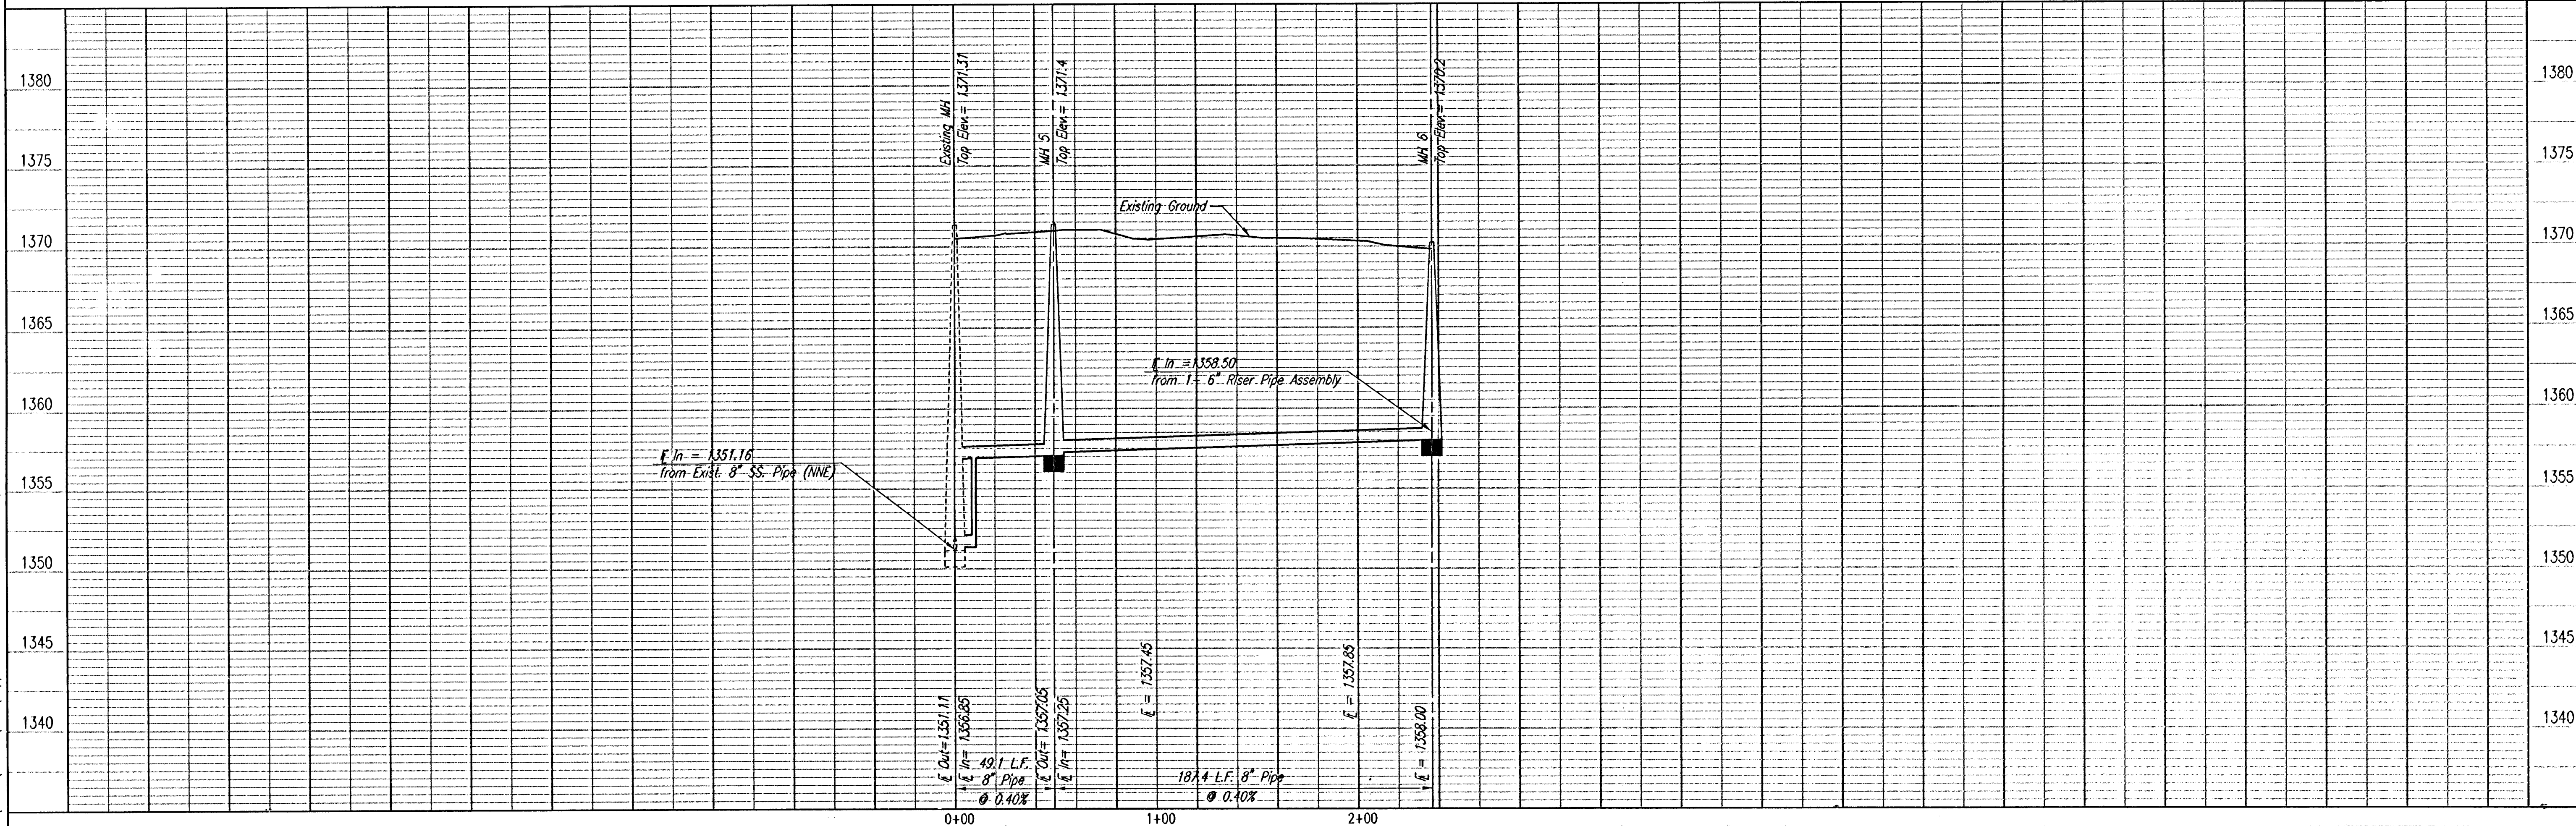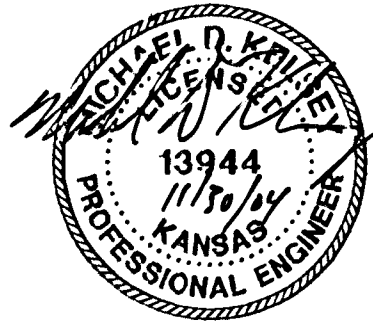

Professional Engineering Consultants, P.A.
303 S. TOPEKA • WICHITA, KANSAS 67202
316-262-2691 • FAX 316-262-3003

Sanitary Sewer Line No. 3

DESIGNED BY: MDK/ALA
DRAWN BY: TLS
DATE: August, 2004

LATERAL 6 MAIN 26 OF THE
WAR INDUSTRIES SEWER

JAMES L. ARKUS, P.E. - ACTING CITY ENGINEER
CITY OF WICHITA, PROJECT NO. 648-8385