



TYPICAL 35' B-B PAVEMENT DETAILS

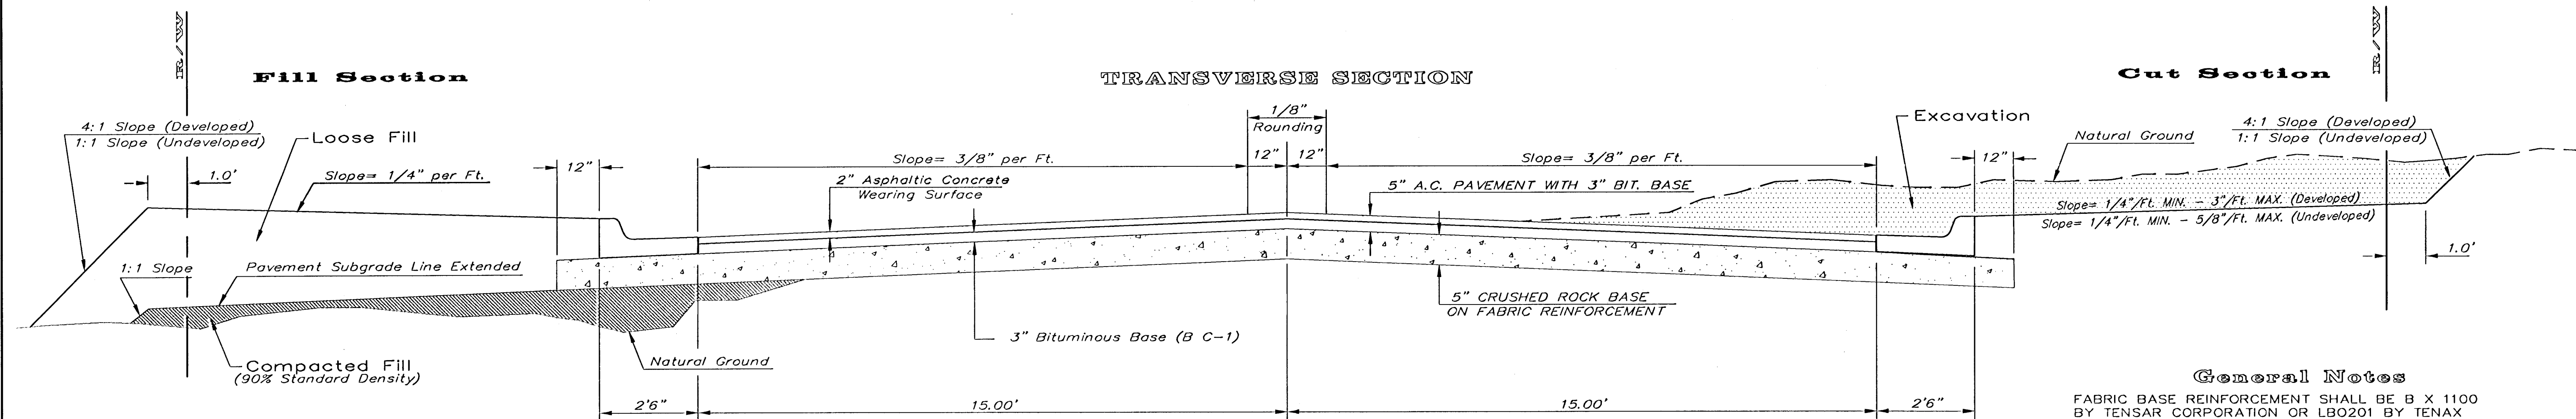


CRUSHED ROCK GRADATION REQUIREMENTS
PERCENT OF AGGREGATE RETAINED

2-1/2"	0
3/4"	20 - 60
#4	50 - 80
#40	80 - 94
#200	90 - 98

ROCK QUALITY SHALL CONFORM TO THE REQUIREMENTS SPECIFIED BY THE KDOT 1990 EDITION STANDARD SPECIFICATION SUBSECTION 1102 FOR DURABILITY CLASS I.

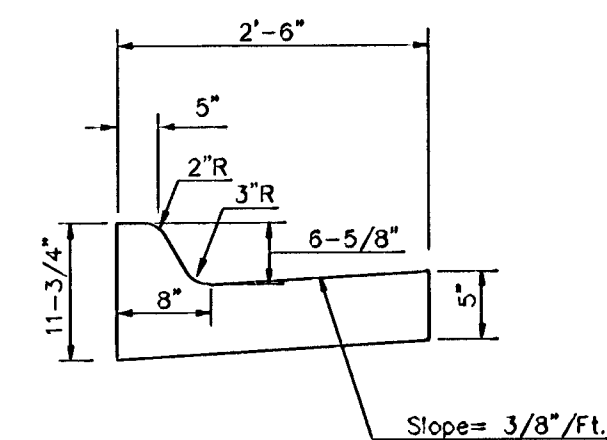


COMBINED CURB & GUTTER

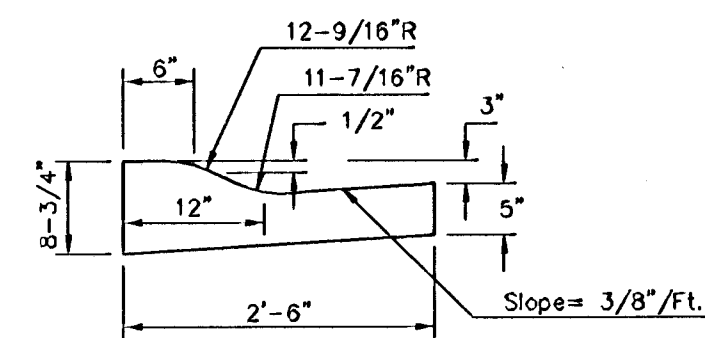


COMBINED ROLL TYPE CURB &
GUTTER

TRANSVERSE SECTION

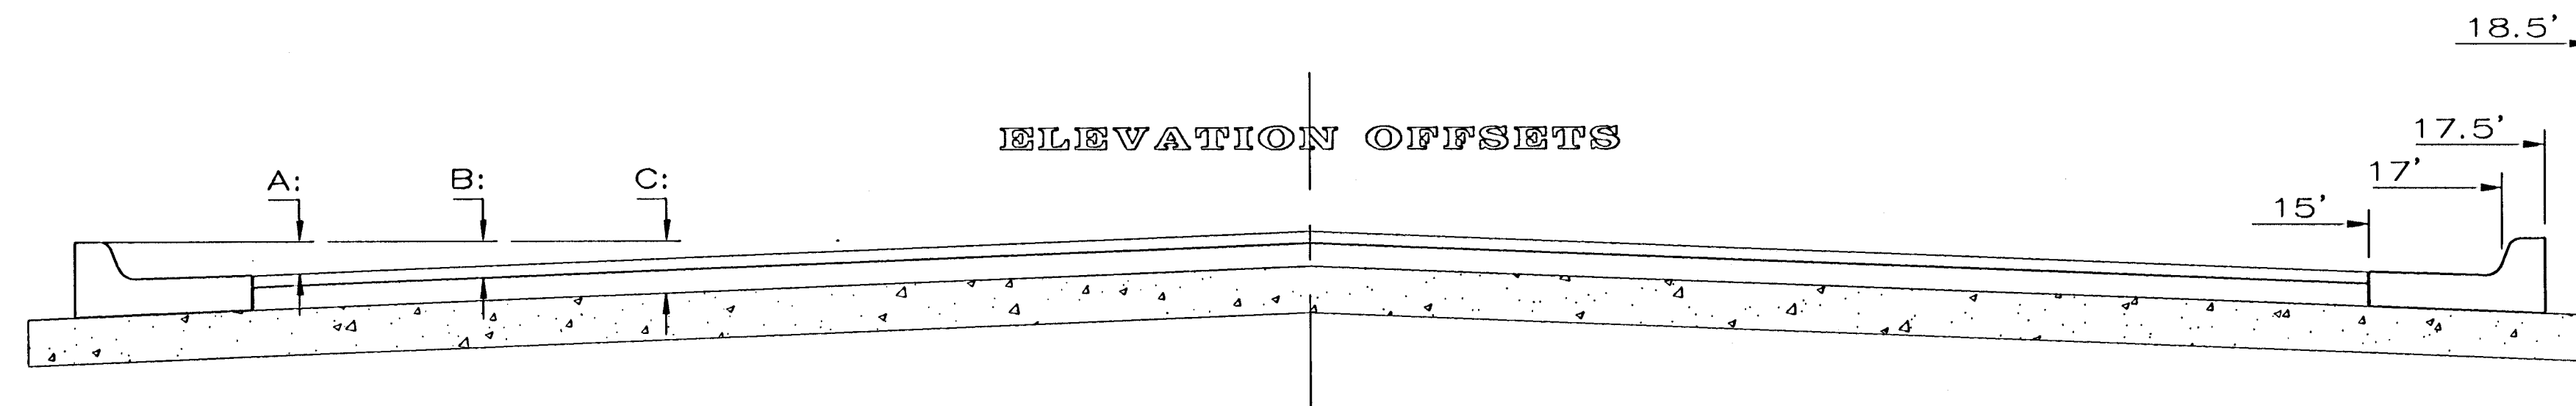


ELEVATION OFFSETS

	DISTANCE FROM CENTERLINE (L.T. & RT.)											
	0'	2'	4'	6'	8.5'	10'	12'	14'	15'	17'	17.5'	18.5'
A: Top of Curbs to Top of Surface Lift	0.04	0.08	0.14	0.21	0.29	0.33	0.39	0.46	0.49	—	—	—
B: Top of Curbs to Top of Upper Base Lift	0.21	0.25	0.31	0.37	0.45	0.50	0.56	0.62	0.65	—	—	—
C: Top of Curbs to Top of C. R. Subgrade	0.46	0.50	0.56	0.63	0.71	0.75	0.81	0.88	0.91	0.97	0.98	1.01

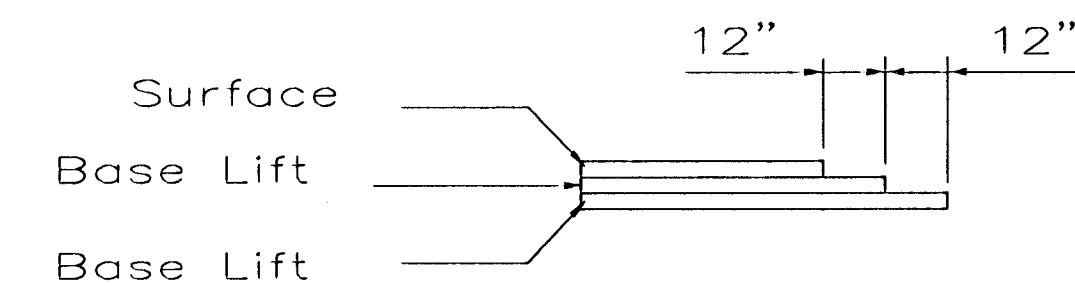


TRANSVERSE CONSTRUCTION JOINTS

Transverse construction joints shall be constructed in flexible base pavements at locations where pavement joints existing flexible base pavement as shown by the detail. All costs associated with the construction of the transverse joint shall be included in the bid price for Square Yards 5" ASPHALTIC CONCRETE (3" BITUMINOUS BASE).

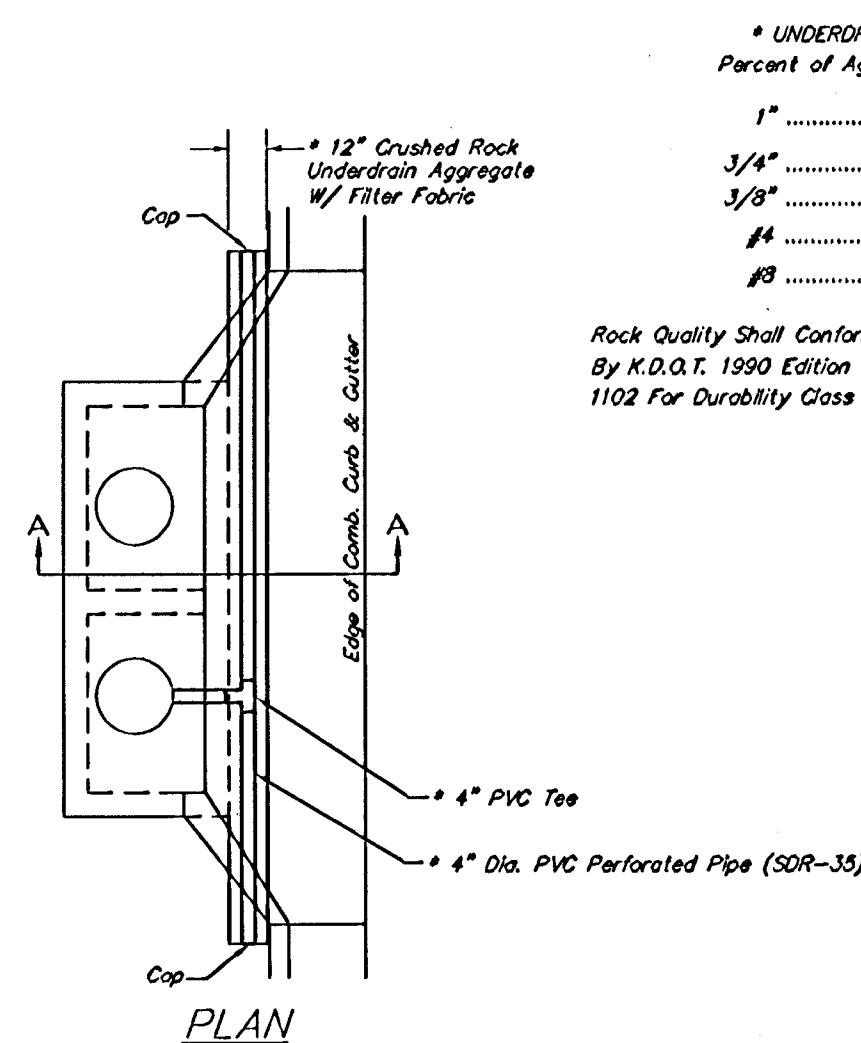

PAVEMENT UNDERDRAIN DETAIL
NOT TO SCALE

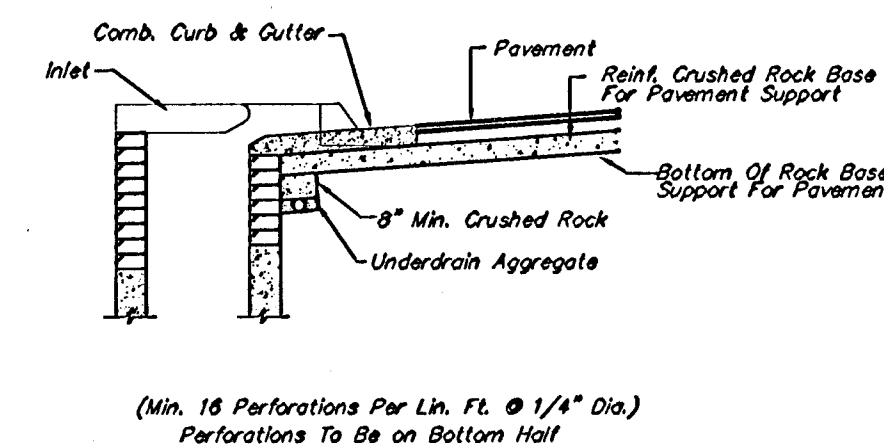

SECTION A-A

Cut Section

General Notes

FABRIC BASE REINFORCEMENT SHALL BE B X 1100 BY TENSAR CORPORATION OR LBO201 BY TENAX CORPORATION OR APPROVED EQUAL. FABRIC BASE REINFORCEMENT SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS.


ROCK BASE IS TO BE COMPACTED AND SMOOTHED WITH A STEEL FACED ROLLER PRIOR TO PLACEMENT OF ASPHALT. TACK COAT WILL NOT BE APPLIED TO ROCK BASE.

A TACK COAT OF EMULSIFIED ASPHALT (SC-1H OR CSS-1H) SHALL BE APPLIED AT AN APPROXIMATE RATE OF 0.05 GALLONS PER SQUARE YARD BETWEEN EACH LIFT OF ASPHALTIC MATERIAL.

BITUMINOUS BASE AND ASPHALTIC CONCRETE WEARING SURFACE SHALL BE PLACED WITH A LAYDOWN MACHINE HAVING AUTOMATIC CONTROLS FOR LINE AND GRADE.

CONSTRUCTION JOINTS IN EACH LIFT SHALL BE STAGGERED
A MINIMUM DISTANCE OF ONE (1) FOOT FROM JOINTS
IN PRECEDING LIFTS AND PLACED SO THAT A JOINT WILL
BE CONSTRUCTED ON THE CENTERLINE OF THE TOP LIFT.

THE ASPHALTIC CONCRETE PAVEMENT BETWEEN THE
COMBINED CURB AND GUTTER SHALL BE PAID AS SQUARE
YARDS OF 5" ASPHALTIC CONCRETE (3" BITUMINOUS BASE.)

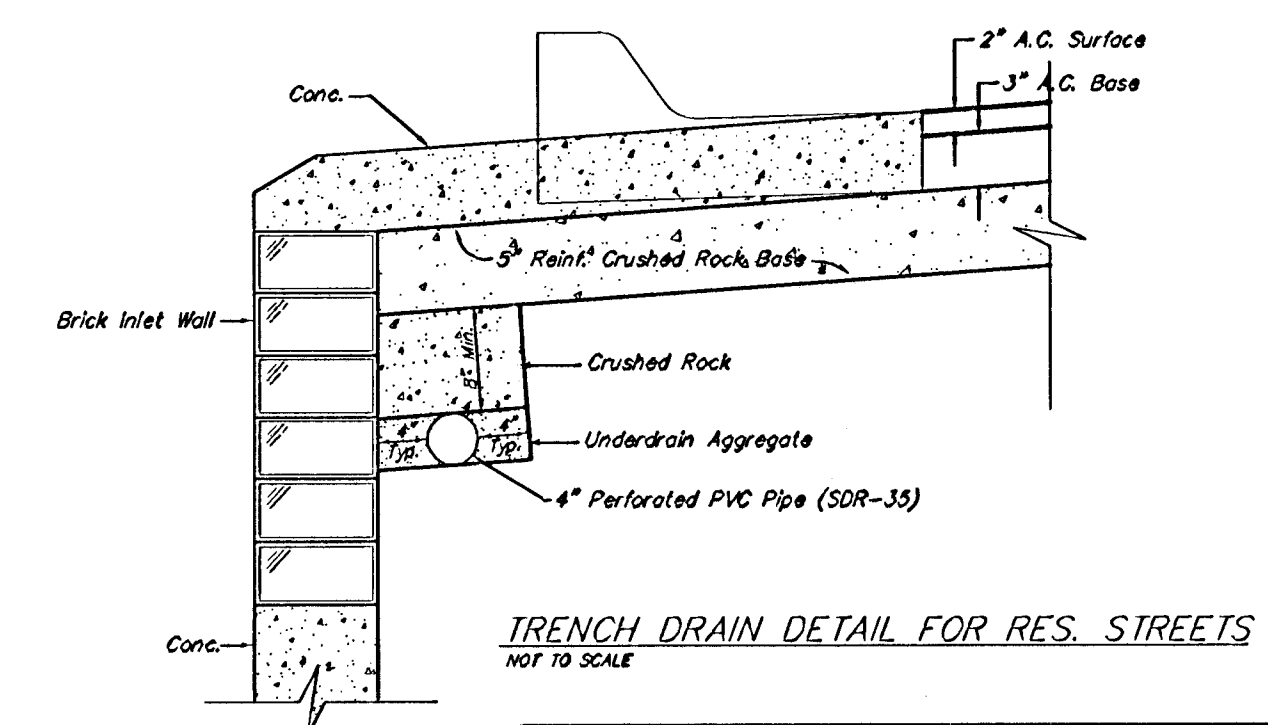

TRENCH DRAIN DETAIL FOR RES. STREETS
NOT TO SCALE

 Baughman Engineering & Surveying	5 Inch Residential Asphalt Concrete Pavement w/Crushed Rock Base on Fabric Reinf. City of Wichita, Kansas																
Baughman Company, P.A. 313 S.W. 5 th St. Wichita, KS 67211 F 316.262.7271 F 316.262.0149 ENGINEERING SURVEYING PLANNING LANDSCAPE/ARCHITECTURE																	
PROJECT NUMBER 472-84262	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">DESIGN</td> <td style="width: 50%;">DRAWN</td> </tr> <tr> <td>C.O.W.</td> <td>Staff</td> </tr> <tr> <td>APPROVED</td> <td>DATE</td> </tr> <tr> <td></td> <td>08/05</td> </tr> <tr> <td colspan="2">SCALE</td> </tr> <tr> <td colspan="2">None</td> </tr> <tr> <td colspan="2">SHEET</td> </tr> <tr> <td colspan="2" style="text-align: center;"> 2 OF 52 </td> </tr> </table>	DESIGN	DRAWN	C.O.W.	Staff	APPROVED	DATE		08/05	SCALE		None		SHEET		2 OF 52	
DESIGN	DRAWN																
C.O.W.	Staff																
APPROVED	DATE																
	08/05																
SCALE																	
None																	
SHEET																	
2 OF 52																	
REVISIONS:																	