


3					
2					
1					
NO.	DATE	REVISION	BY	APP'D	
KANSAS DEPARTMENT OF TRANSPORTATION TYPE III BARRICADE (TEMPORARY) WITH RII-2 SIGN					
TE620SH				12-30-94	
FHWA APPROVAL I-10-95		APP'D WELDA A. BUCKLEY			
DESIGNED	DETAILED	QUANTITIES	TRACED		
DESIGN CK.	DETAIL CK.	QUAN. CK.	TRACE CK.		

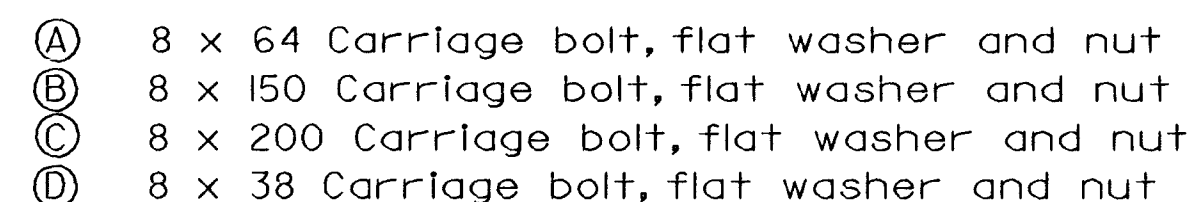

GENERAL NOTE

BORDER AND LEGEND ON THE ROAD CLOSED SIGN SHALL BE AS SPECIFIED IN THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, CURRENT EDITION. BACKGROUND SHALL BE COVERED WITH TYPE II HIGH PERFORMANCE RETROREFLECTIVE SHEETING.

ALUMINUM SIGN BLANK IS TO BE ASTM B209(H) ALLOY 6061-T6, 5154-H38, OR 5052-H38. BOTH FACES AND ALL CUT EDGES OF SIGN TO BE DEGREASED AND ETCHED. SIGNS SHALL BE MANUFACTURED FROM 2.5 mm THICK ALUMINUM.

ALL HOLES ON SIGN BLANK ARE 10 mm SQUARE, UNLESS OTHERWISE NOTED.

THE RII-2 SIGN IS TO BE INCLUDED IN THE BID ITEM DIRECT SCREEN PROCESS SIGNS (HIGH PERFORMANCE).

ALL ITEMS OF FASTENING ACCESSORIES ARE REQUIRED TO BE ZINC OR CADMIUM PLATED. THE CARRIAGE BOLTS, NUTS AND WASHERS SHALL COMPLY WITH SUBSECTION 1614 OF THE STANDARD SPECIFICATIONS FOR STATE ROAD AND BRIDGE CONSTRUCTION (1990 EDITION).

ALL 'U' POST SECTIONS SHALL BE GALVANIZED. THE POSTS SHALL COMPLY WITH THE WEIGHT TOLERANCE AND COATING REQUIREMENTS OF SUBSECTION 1620 OF THE STANDARD SPECIFICATIONS FOR STATE ROAD AND BRIDGE CONSTRUCTION (1990 EDITION).

WOOD POSTS SHALL BE GIVEN A PRESERVATIVE TREATMENT AS PROVIDED IN THE K.D.O.T. STANDARD SPECIFICATIONS.

TYPE III BARRICADES PLACED ACROSS A ROADWAY SHALL BE SUITABLY DISTRIBUTED ACROSS THE ROAD TO EFFECTIVELY CLOSE THE ROADWAY.

BARRICADES ARE TO BE SET AT EACH ROAD TO BE CLOSED AS SPECIFIED ON THE PLANS.

FOR WOODEN BARRICADES, NOMINAL LUMBER DIMENSIONS WILL BE SATISFACTORY.

THE ENTIRE AREA OF BARRICADE RAILS SHALL BE FULLY REFLECTORIZED WITH TYPE II HIGH PERFORMANCE RETROREFLECTIVE SHEETING.

BARRICADES INTENDED FOR USE ON ROADWAYS WITH SPEED LIMITS OF 45 MPH OR MORE SHALL HAVE A MINIMUM OF 0.175 m² OF RETROREFLECTIVE AREA FACING TRAFFIC.

THE STRIPES SHALL SLOPE DOWNWARD AND TOWARD THE CENTER OF THE ROADWAY AT ROAD CLOSURES.

THE BID ITEM TYPE III BARRICADE (TEMPORARY) IS FOR ONE BARRICADE.

[illegible]

Plotted By : 00USER\NAME00 Thacher Bldg., 4th Floor
Plot File : 0000000000000000DONSPEC000000000000000
Plot Date : 000000STIME000000