

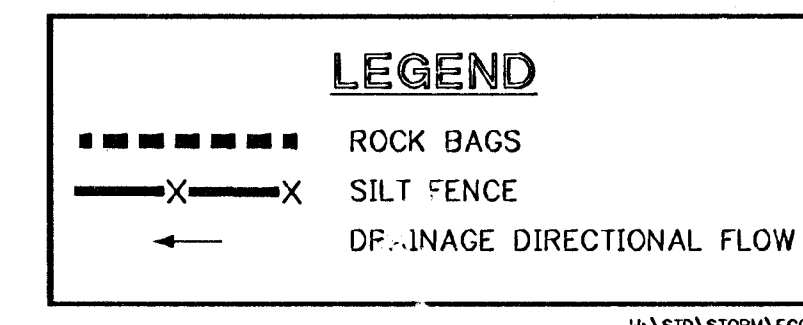
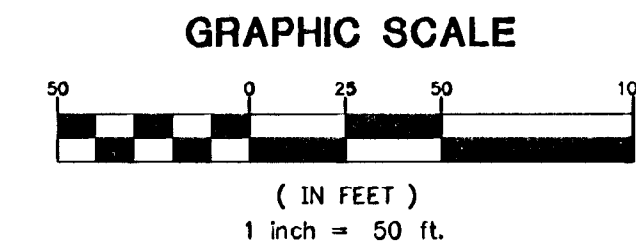


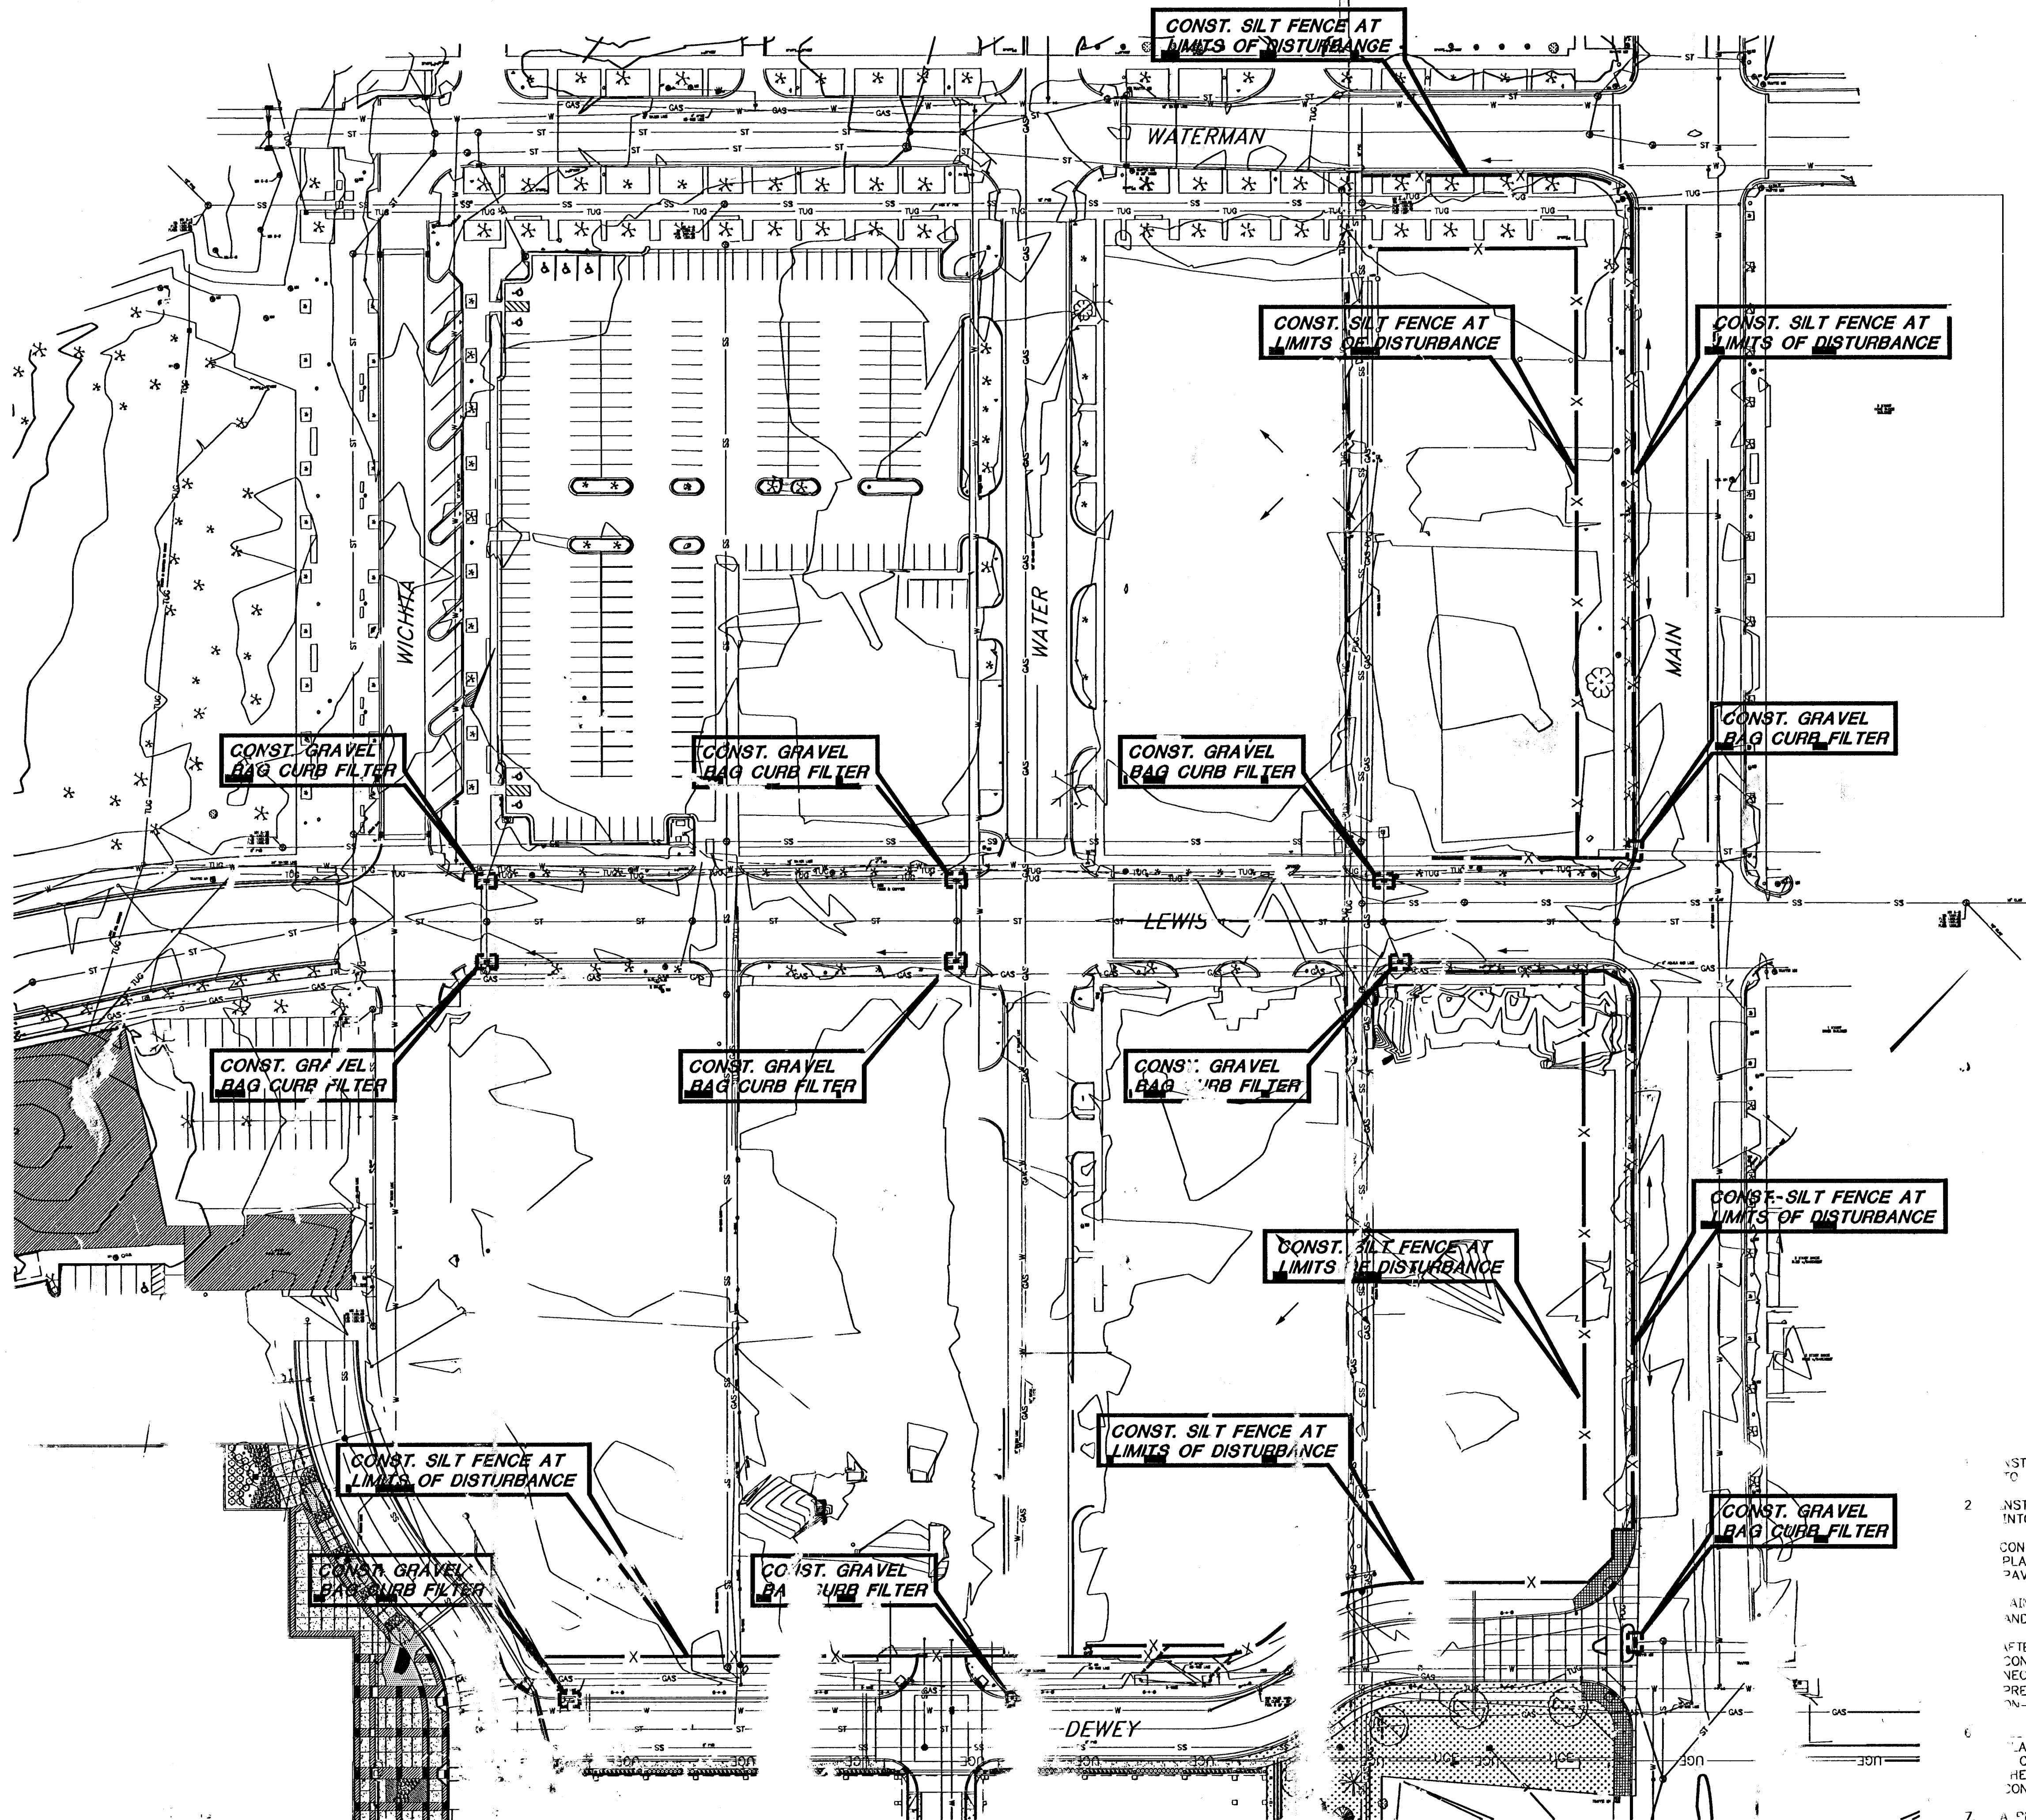

- EROSION CONTROL SITE PLAN - GENERAL NOTES**
1. INSTALL PERIMETER ROCK BAG BARRIERS AND/OR SILT FENCES PRIOR TO REMOVING TOPSOIL OR BEGINNING GRADING ACTIVITIES.
 2. INSTALL STABILIZED CONSTRUCTION ENTRANCE IN AN AREA DRAINING INTO THE POLLUTION CONTROL SYSTEM.
 3. CONSTRUCT ROCK BAG DITCH CHECKS AS SHOWN ON THE APPROVED PLANS AND AS NECESSARY TO PREVENT EROSION DAMAGE PRIOR TO PAVING.
 4. MAINTAIN ALL EROSION CONTROL MEASURES UNTIL ALL PAVEMENT AND/OR GROUND COVER IS ESTABLISHED.
 5. AFTER ALL PRECIPITATION OF 0.5 INCHES OR GREATER, EROSION CONTROL FACILITIES SHALL BE INSPECTED AND MAINTAINED AS NECESSARY AND IN ACCORDANCE WITH THE STORM WATER POLLUTION PREVENTION PLAN (SWPPP). INSPECTION REPORTS SHALL BE KEPT ON-SITE AS REQUIRED IN THE SWPPP.
 6. COMPLETE FORMS AND A STORM WATER POLLUTION PREVENTION PLAN MANUAL SHALL BE KEPT AND POSTED ON SITE. A COPY OF THE EROSION CONTROL PLAN SHALL BE MAINTAINED AT THE SITE AND MADE AVAILABLE TO INSPECTORS AT ALL TIMES DURING CONSTRUCTION HOURS.
 7. A PERSON IN RESPONSIBLE CHARGE SHALL BE AVAILABLE DURING CONSTRUCTION HOURS TO SUPERVISE IMPLEMENTATION AND MAINTENANCE OF THE POLLUTION PREVENTION PLAN.

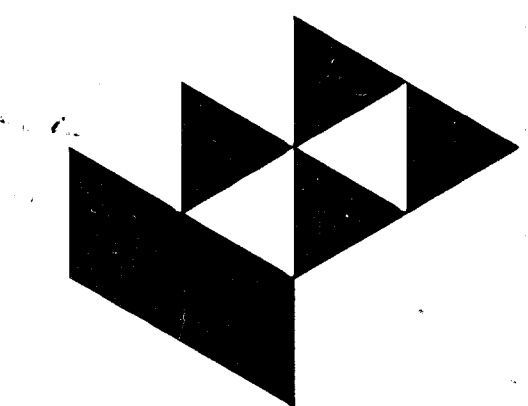

GossenLivingston
Architecture
420 South Emporia
Wichita, KS 67202
Tel: (316) 265-9367
Fax: (316) 265-5646
Email: architecture@gl.com

© 2005 Gossen Livingston Associates, Inc.
The drawing and all information herein is the exclusive property of Gossen Livingston Associates, Inc. and is not to be copied or used in any way without the express written consent of Gossen Livingston Associates, Inc. All drawings, specifications, notes, designs and arrangements appearing herein shall be the original and unpublished work of Gossen Livingston Associates, Inc.



Johnson & Associates, Inc.
100 E. California Ave. - Third Floor
Oklahoma City, OK 73104
(405) 235-9075 FAX (405) 235-9078
Certificate of Authorization #92-1128 EXP. DATE: 12-31-2008



**PUBLIC
IMPROVEMENTS
PHASE 2
PACKAGE 1**

Mark Date Describe

**EROSION & SEDIMENTATION
CONTROL PLAN**

1
2
3
4