

GENERAL NOTES


A FULL DEPTH SAW CUT SHALL BE PROVIDED IN CURB AND GUTTER AND/OR SIDEWALK AT THE REMOVAL LIMIT SHOWN ON THE PLANS. THE LIMITS OF REMOVAL SHALL EXTEND TO THE EXISTING JOINT IF A JOINT IS WITHIN 3 FEET OF THE PLAN REMOVAL LIMITS. CUTS SHALL BE CONSIDERED SUBSIDIARY TO OTHER CONTRACT ITEMS.

CONTRACTOR SHALL BE REQUIRED TO PROVIDE A MINIMUM OF ONE LANE OF TRAFFIC EACH DIRECTION AT ALL TIMES. CONTRACTOR SHALL PROVIDE, ERECT AND MAINTAIN ALL TRAFFIC CONTROL DEVICES ACCORDING TO THE LATEST EDITION OF THE "MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES" (MUTCD).



CONTRACTOR SHALL SUBMIT A CONSTRUCTION SEQUENCE AND TRAFFIC HANDLING PLAN TO THE ENGINEER FOR APPROVAL PRIOR TO COMMENCING WORK ON THE PROJECT.

ALL DISTURBED AREAS SHALL BE SEEDED/FERTILIZED AND MULCHED IN ACCORDANCE WITH THE SPECIFICATIONS. THIS WORK SHALL BE INCIDENTAL TO THE BID ITEM "LANDSCAPING".

- ① Remove and Replace Sidewalk from Sta. 2+75 to Sta. 5+00 as shown on Plan.
- ② Dimension varies from 1'-6" to 0'-0" between Proposed High Edge and Existing Pavement.
- ③ Saw Cut, Remove, and Replace Surface Course as necessary to provide a neat line. This work to be subsidiary to Asphalt Pavement.

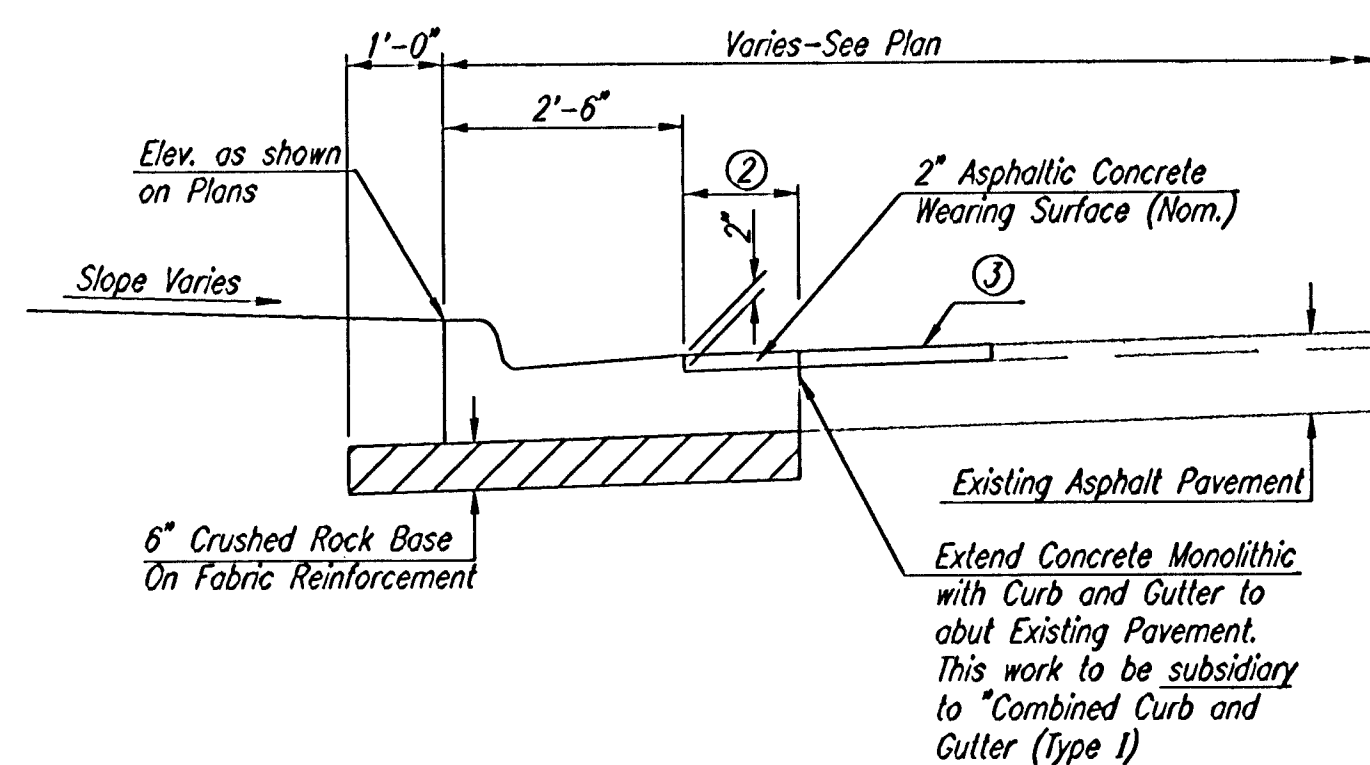

DETAIL A

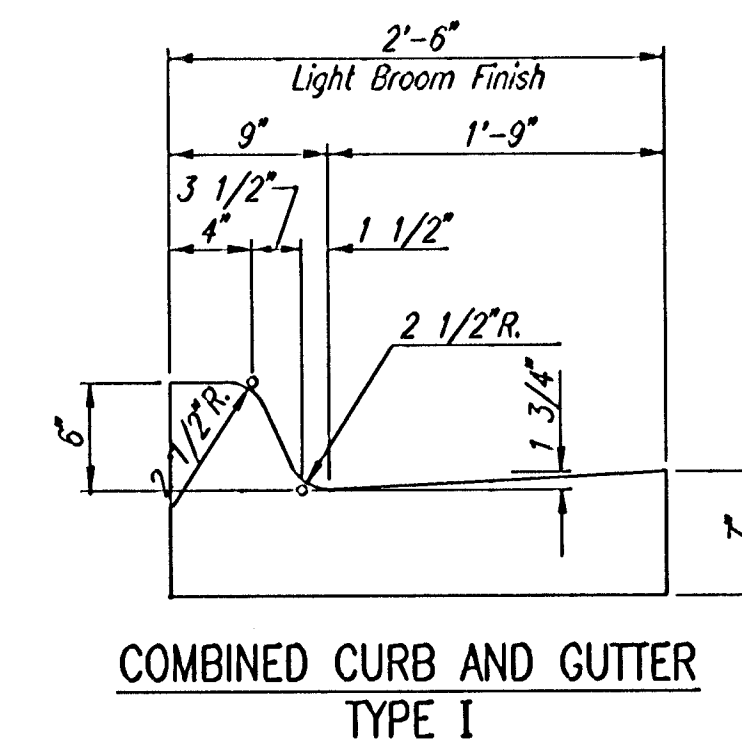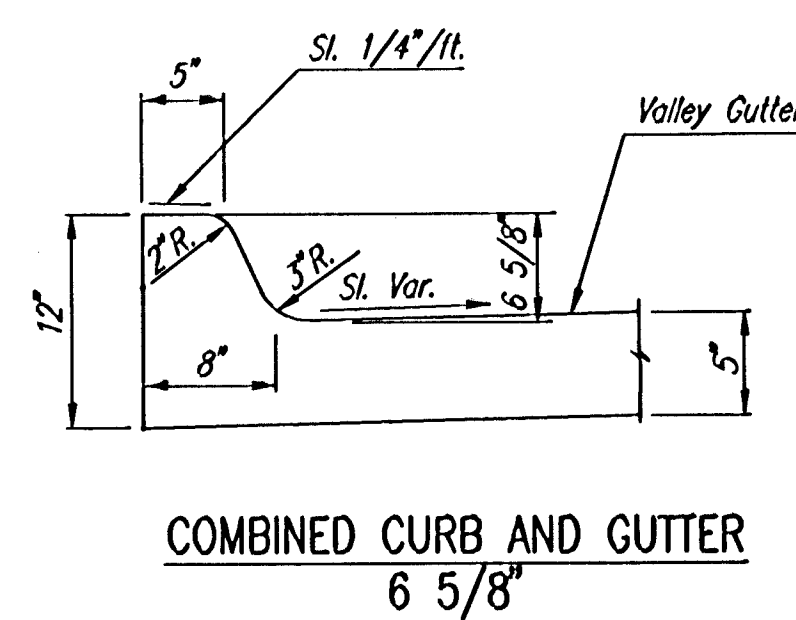

DSNR: BER OPER: ILS SCALE: 1=4.00
Q:\2001\01034\WOODLAWN\TYPSEC 11-13-2001 01:58:22 pm

WOODLAWN			
TYPICAL SECTIONS			
 Professional Engineering Consultants, P.A. 303 S. TOPEKA • WICHITA, KANSAS 67202 316-262-2691 • FAX 316-262-3003			
Designed by	DRC	Checked by	BER
Drawn by	DEP	Date	JUNE, 2001
		Job No. 01034	