

DEMOLITION NOTES:



- DEMOLITION PLANS SHOW THE GENERAL EXTENT OF THE ELECTRICAL DEMOLITION WORK. THE ELECTRICAL CONTRACTOR SHALL DISCONNECT ELECTRICAL SERVICES TO ALL EQUIPMENT BEING REMOVED, SEE MECHANICAL PLANS. OWNER SHALL HAVE THE OPTION TO RETAIN REUSABLE ITEMS, SUCH AS COVERPLATES, RECEPTACLES, LIGHTS, PANELS, ETC. NOT BEING USED IN THE FINISHED WORK. COORDINATE WITH OWNER PRIOR TO STARTING DEMOLITION. PROPERLY AND LEGALLY DISPOSE OF ALL EQUIPMENT AND MATERIALS BEING REMOVED.
- GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR PATCHING ALL OPENINGS IN EXISTING CONSTRUCTION AFTER REMOVAL OF EQUIPMENT AND ELECTRICAL DEVICES, ETC.
- WHERE EQUIPMENT AND OTHER DEVICES ARE BEING REMOVED, THE CIRCUITING SHALL BE REMOVED, IF POSSIBLE, BACK TO POINT OF SUPPLY. WHERE REQUIRED, CIRCUITING SHALL BE EXTENDED TO MAINTAIN CONTINUITY OF THE CIRCUIT OR OPERATION OF THE SYSTEM.
- ALL DEVICES SHOWN DASHED ON THE DEMOLITION PLAN(S) SHALL BE REMOVED, UNLESS NOTED OTHERWISE.
- PROVIDE MATCHING BLANK COVERPLATES WHERE DEVICES ARE BEING REMOVED FROM EXISTING WALLS TO REMAIN.
- FIELD VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS PRIOR TO BEGINNING WORK.

KEYED PLAN NOTES:

- ① REMOVE AUTOTRANSFORMER SECTIONS FOR PUMP #1, #3 AND #4 AND REPLACE WITH NEW SECTIONS AS SHOWN ON SHEET E3.2.
- ② EXISTING CONTROL PANEL 'CP-5' TO BE RELOCATED. EXTEND AND REWORK EXISTING CONDUIT AS REQUIRED. PROTECT CONTROL PANEL DURING CONSTRUCTION.
- ③ EXISTING CONTROL PANEL 'CP-2' TO BE RELOCATED. EXTEND AND REWORK EXISTING CONDUIT AS REQUIRED. PROTECT CONTROL PANEL DURING CONSTRUCTION.

A

ELECTRICAL PUMP ROOM - DEMOLITION

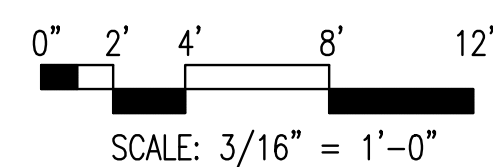

CITY OF WICHITA, KS
CHENEY VARIABLE FREQUENCY DRIVE
UPGRADE
CHENEY, KS

Issue:	
JOB NO.	217043-012
DATE	OCTOBER 2023
PM	RDB
DESIGNED BY	DCG
DRAWN BY	JAB
CHECKED BY	RWW

ELECTRICAL PUMP ROOM -
DEMOLITION

Saved: 06-30-2022 9:16:43 AM by JACOB BURNS
 Plot Scale: 1:1 10-06-2023 12:08:27 PM by SHANAMAZEN
 U:\Wichita-City\2021\217043\012\Elec\Drawings\E2.1 ELECTRICAL PUMP ROOM - DEMOLITION