






IMPROVEMENT PLANS FOR
15TH STREET BRIDGE OVER THE WICHITA DRAINAGE CANAL
WICHITA, KS

SIGNING AND PAVEMENT MARKING PLAN		
PROJECT NO. 472-2023-085864		
SCALE	NTS	
DRAWN	DESIGNED	CHECKED
RAM	JRA	JRA
ISSUED FOR CONSTRUCTION	8-1-2025	
NO.	REVISION	DATE
SHEET NO. 89 OF 114		

SUMMARY OF QUANTITIES (FOR INFORMATION ONLY)		
ITEMS	QUANTITY	UNIT
Pavement Marking (White)(4")	329	L.F.
Pavement Marking Symbol (Handicap)	1	Each
Pavement Marking Symbol (Sharrow)	2	Each

RECAPITULATION OF QUANTITIES		
BID ITEM	QUANTITY	UNIT
Pavement Marking	Lump Sum	L.S.

Pavement Markings – All pavement markings shall be epoxy, unless otherwise approved by the Engineer. Pavement markings shall be installed per manufacturer's recommendations and shall meet KDOT's 2015 Edition of the Standard Specification Section 806. Full traffic may not be restored (and substantial project completion achieved) until all pavement markings are in place. Should construction timing be such that restoration of traffic becomes necessary during weather prohibiting the installation of markings, the contractor shall install and maintain temporary markings until such time that permanent markings may be properly installed. Except for the material requirement, temporary pavement markings shall be placed equivalent, in every manner (i.e. dimension, frequency, spacing, etc.), to the permanent marking layout. The cost for temporary pavement markings will not be paid for directly, but shall be considered subsidiary to the bid item for "Pavement Markings".

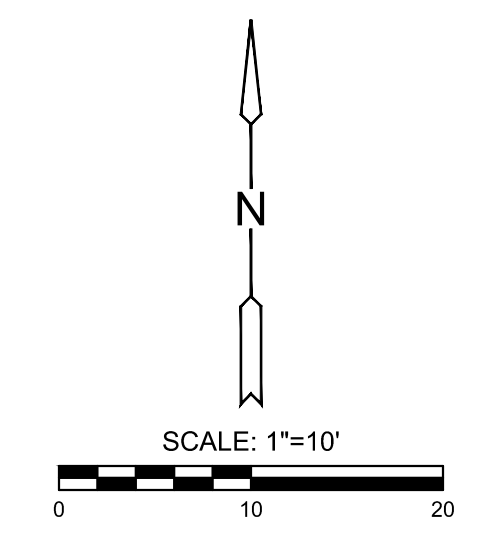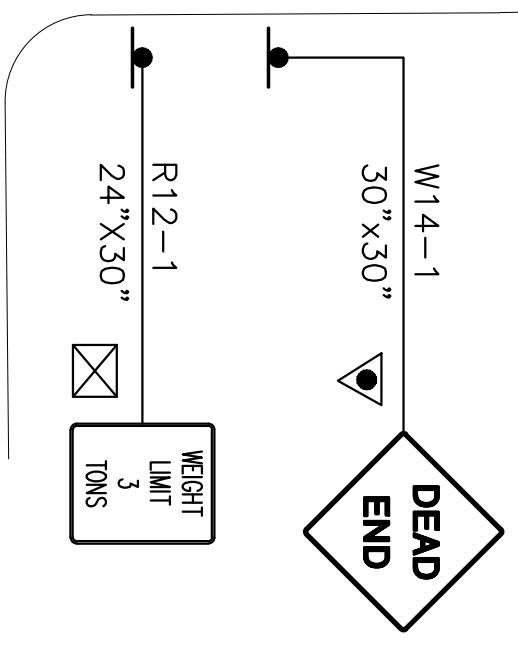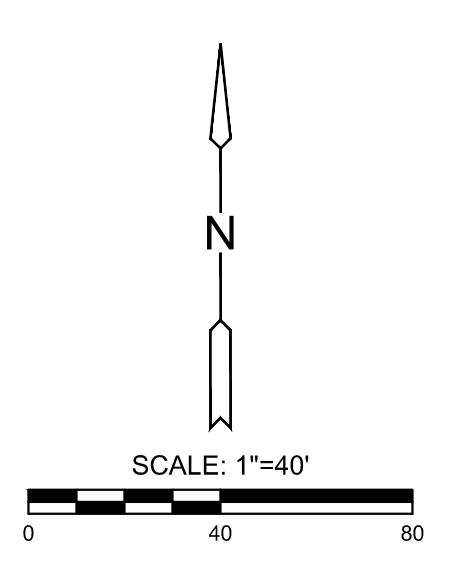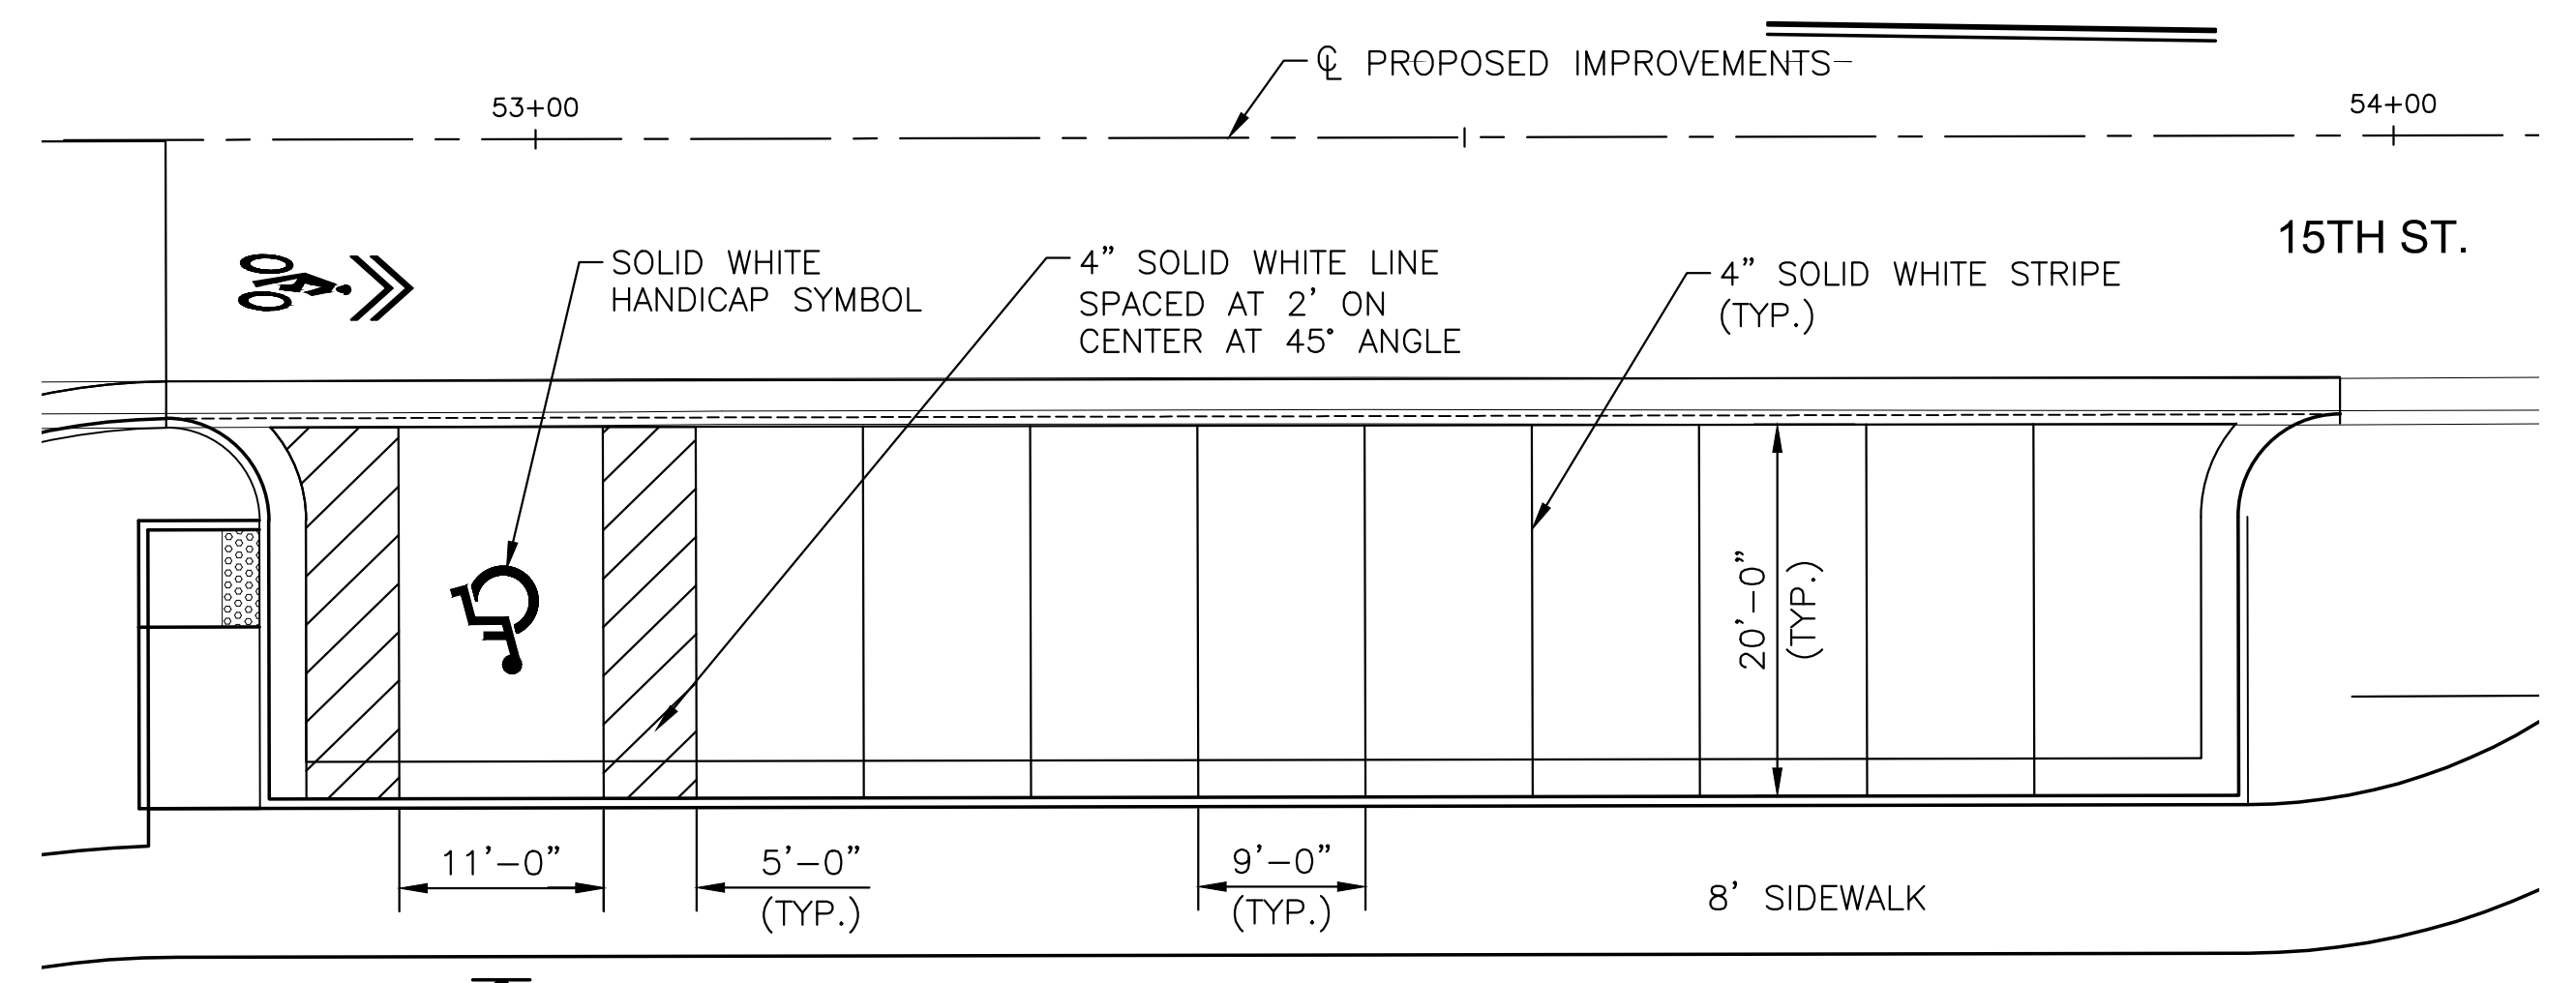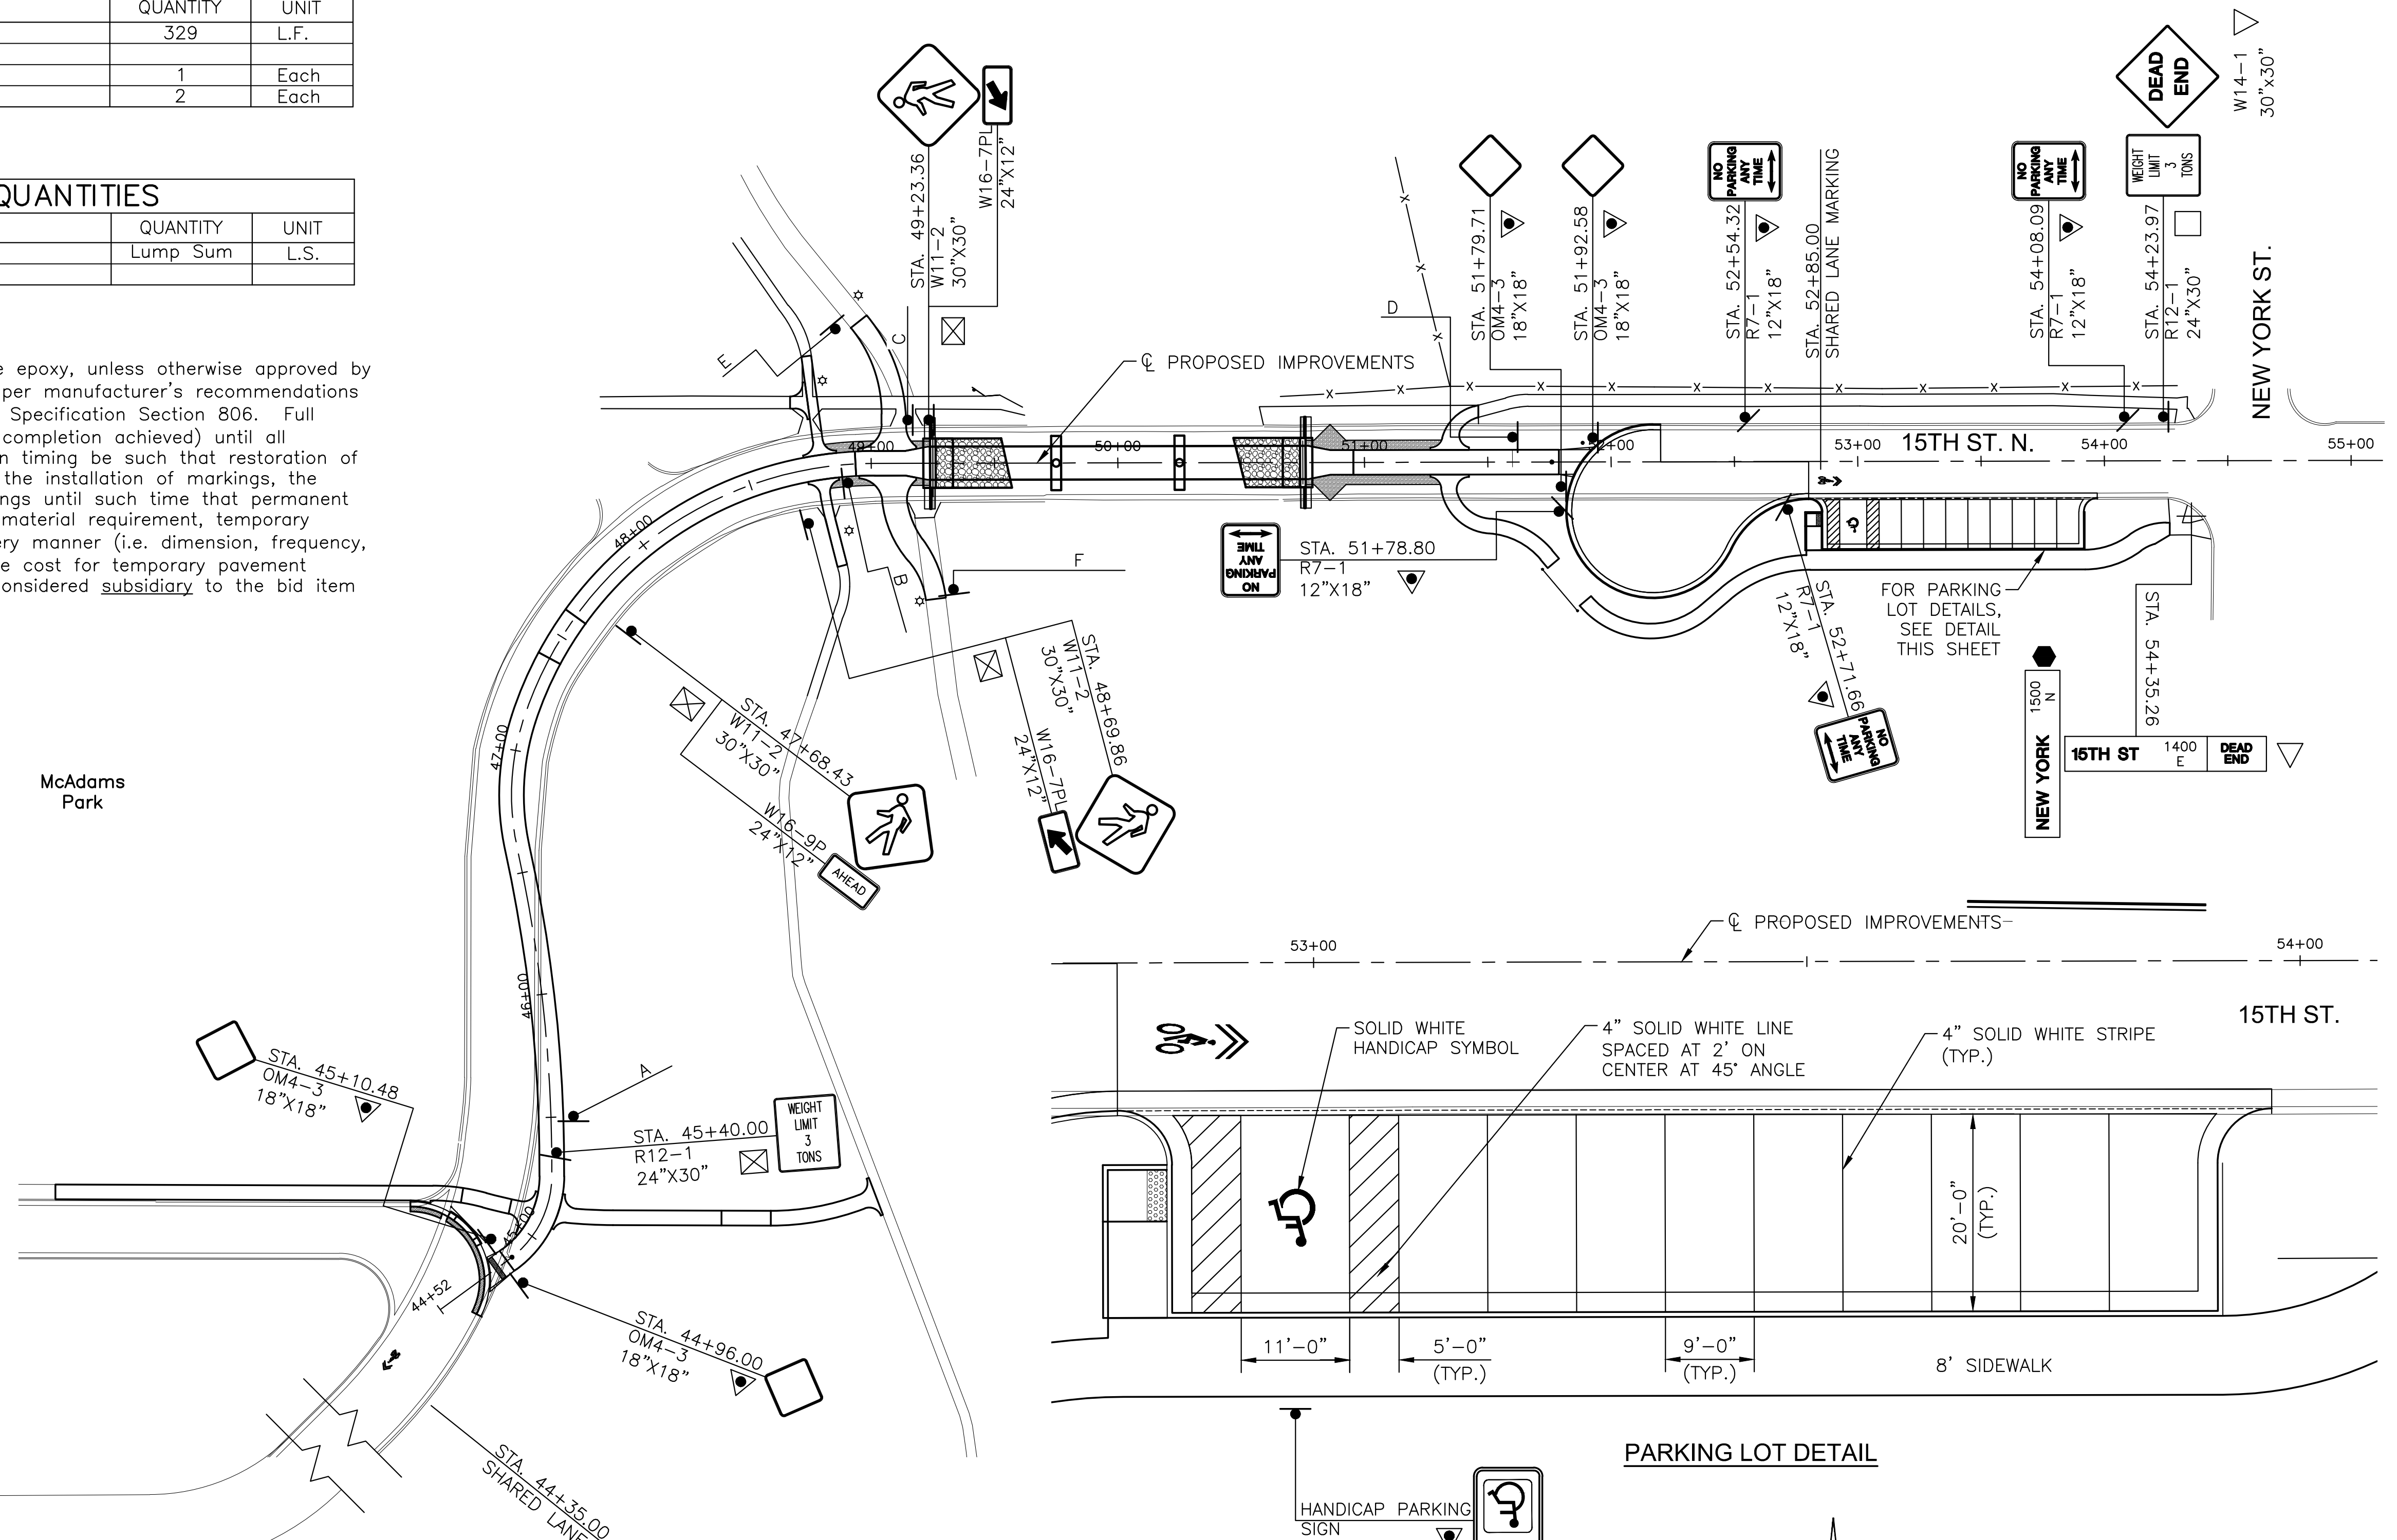

- SIGNING LEGEND**
- SIGN NOT PART OF PROJECT
 - ▼ INSTALL NEW SIGN AND POST
 - ⊠ REMOVE SIGN, POST, & RETURN TO OWNER
 - ⊕ STREET NAME SIGN
 - TRAFFIC SIGN
 - ▽ INSTALL NEW SIGN ON EXISTING POST
 - REMOVE SIGN FROM POST

J:\PROJECTS\2023\20231010\431_COW_WDG_BRIDGE REPLACEMENT AT 15TH STREET\100-230431_CADD\SHOTS\06_CIVIL\PAV\230431_SIGNING MARKING.DWG
 PLOTTED: Friday, August 01, 2025 @ 08:53AM