



HILLSIDE AVENUE

N.L. TWENTY-FIRST ST. - N.L. TWENTY-SEVENTH ST.
PROJECT C12-45

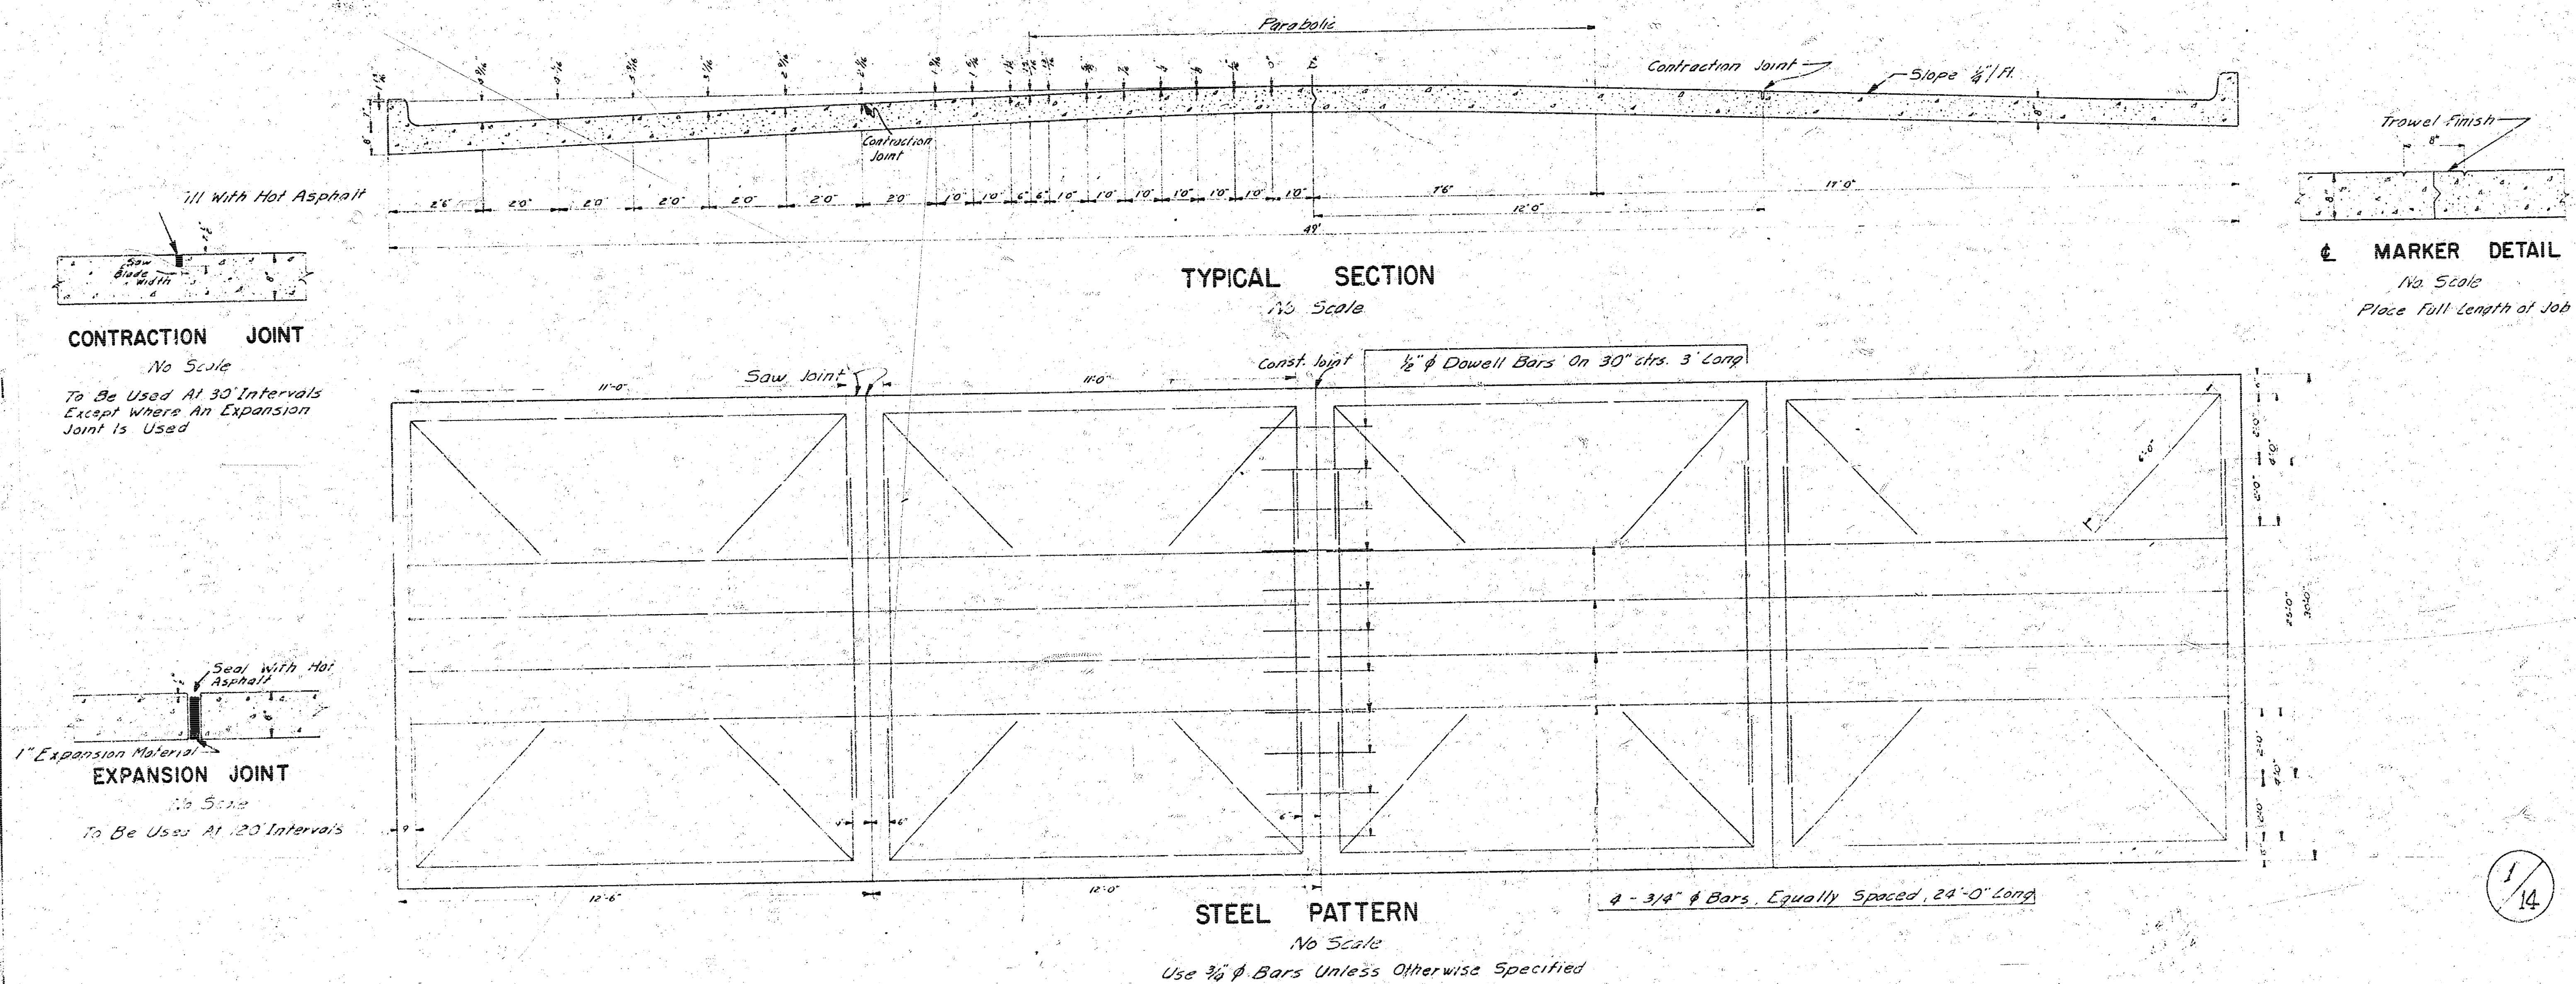

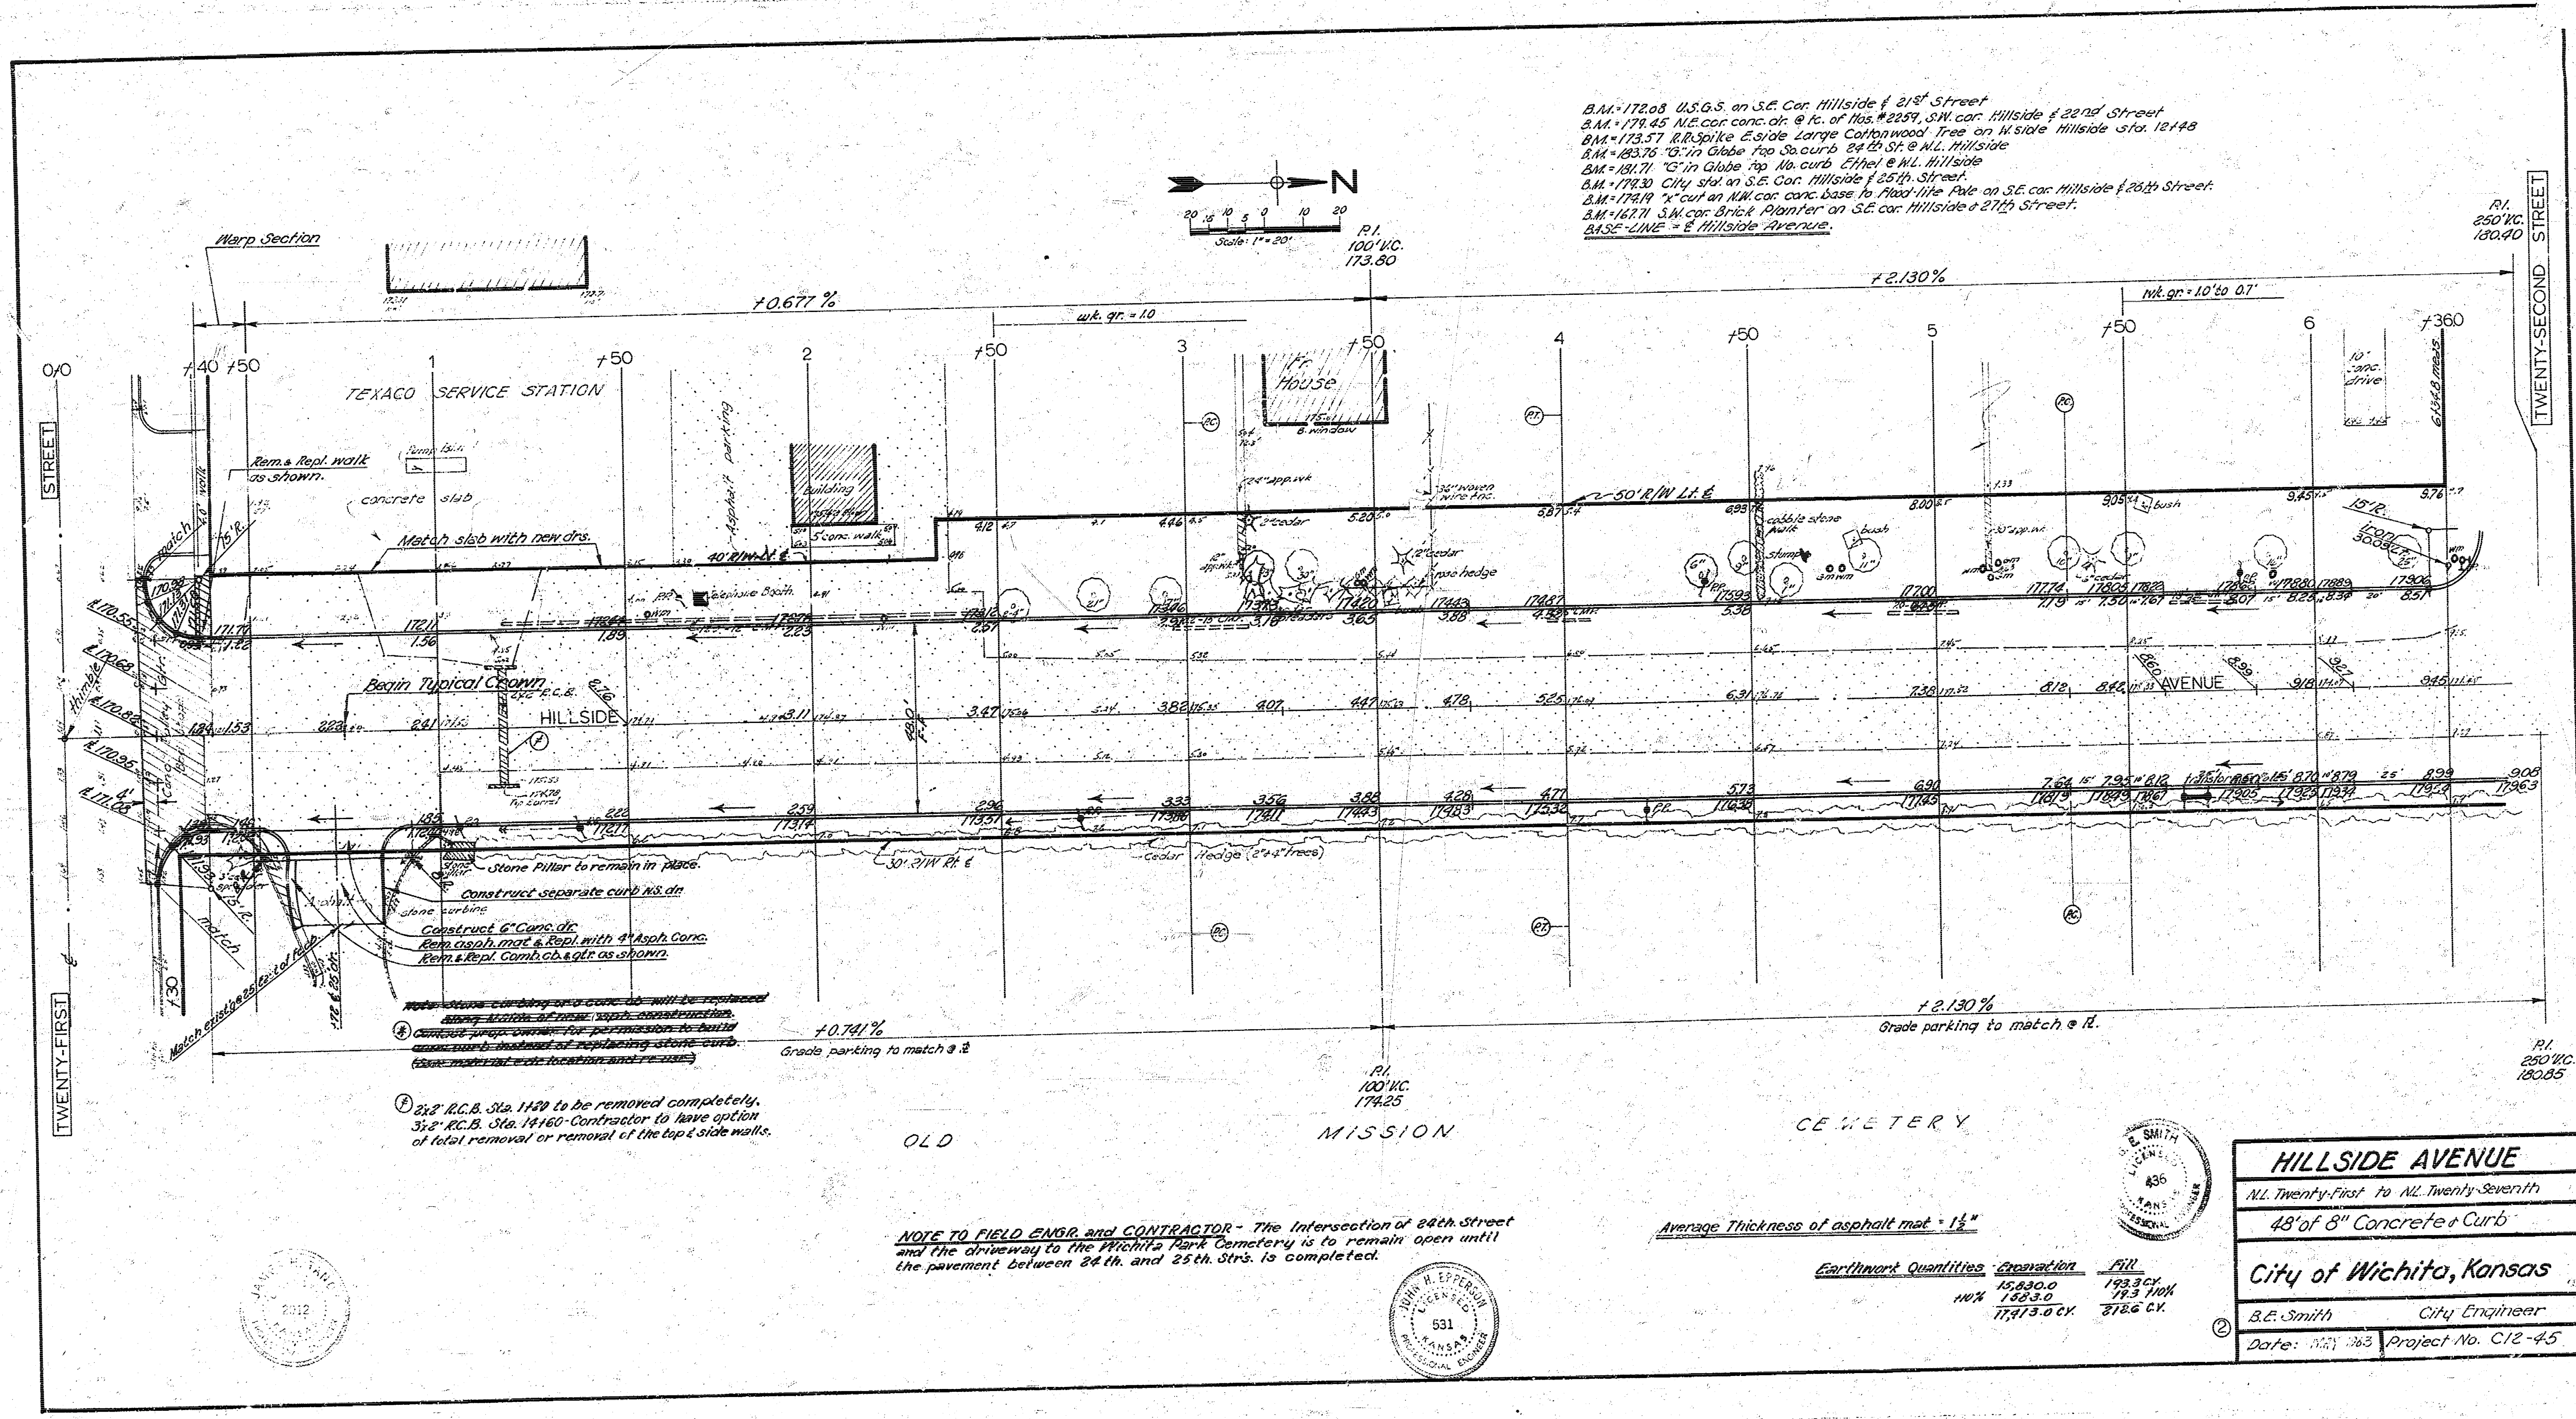

B.M. 172.08 U.S.G.S. on S.E. Cor. Hillside & 21st Street
S.M. 171.45 N.E. cor. conc. dr. @ ft. of Nos. 8257, S.W. cor. Hillside & 22nd Street
B.M. 173.57 R.R. Spike E. side Large Cottonwood Tree on N. side Hillside sta. 12+48
B.M. 183.76 10" in Globe Top Sta. curb 24th St. & N. Hillside
S.M. 181.71 10" in Globe Top S.E. Cor. Hillside & 25th Street
S.M. 179.33 City Sta. on S.E. Cor. Hillside & 25th Street
S.M. 174.19 " cut on NW cor. conc. base to Road like Pole on S.E. cor. Hillside & 26th Street
S.M. 167.71 S.W. cor. Brick Planter on S.E. cor. Hillside & 27th Street
BASE LINE = E Hillside Avenue

① 21st R.C.B. Sta. 1470 to be removed completely.
31st R.C.B. Sta. 1460-Contractor to have option
of total removal or removal of the top & side walls.

NOTE TO FIELD ENGINEER and CONTRACTOR - The Intersection of 26th Street
and the driveway to the Wichita Park Cemetery is to remain open until
the pavement between 26th and 25th Str. is completed.

Average Thickness of asphalt mat = 1 1/2"

Earthwork Quantities	Excavation	FILL
	15,830.0	193.3 CY
	1883.0	79.3 TON
	17,713.0 CY	272.6 CY

HILLSIDE AVENUE	
N.E. Twenty-First to N.E. Twenty-Seventh	
48' of 8" Concrete & Curb	
City of Wichita, Kansas	
B.E. Smith	City Engineer
Date: May 1963	Project No. C12-45

