

OSIE COURT

W. L. BEECH TO AND INCLUDING CUL-DE-SAC


472-76-245-80803-000-000-001

CITY OF WICHITA, KS.

R. W. BRUGGEMAN ——— DIR. ENGINEERING




Scale:
1" = 100'

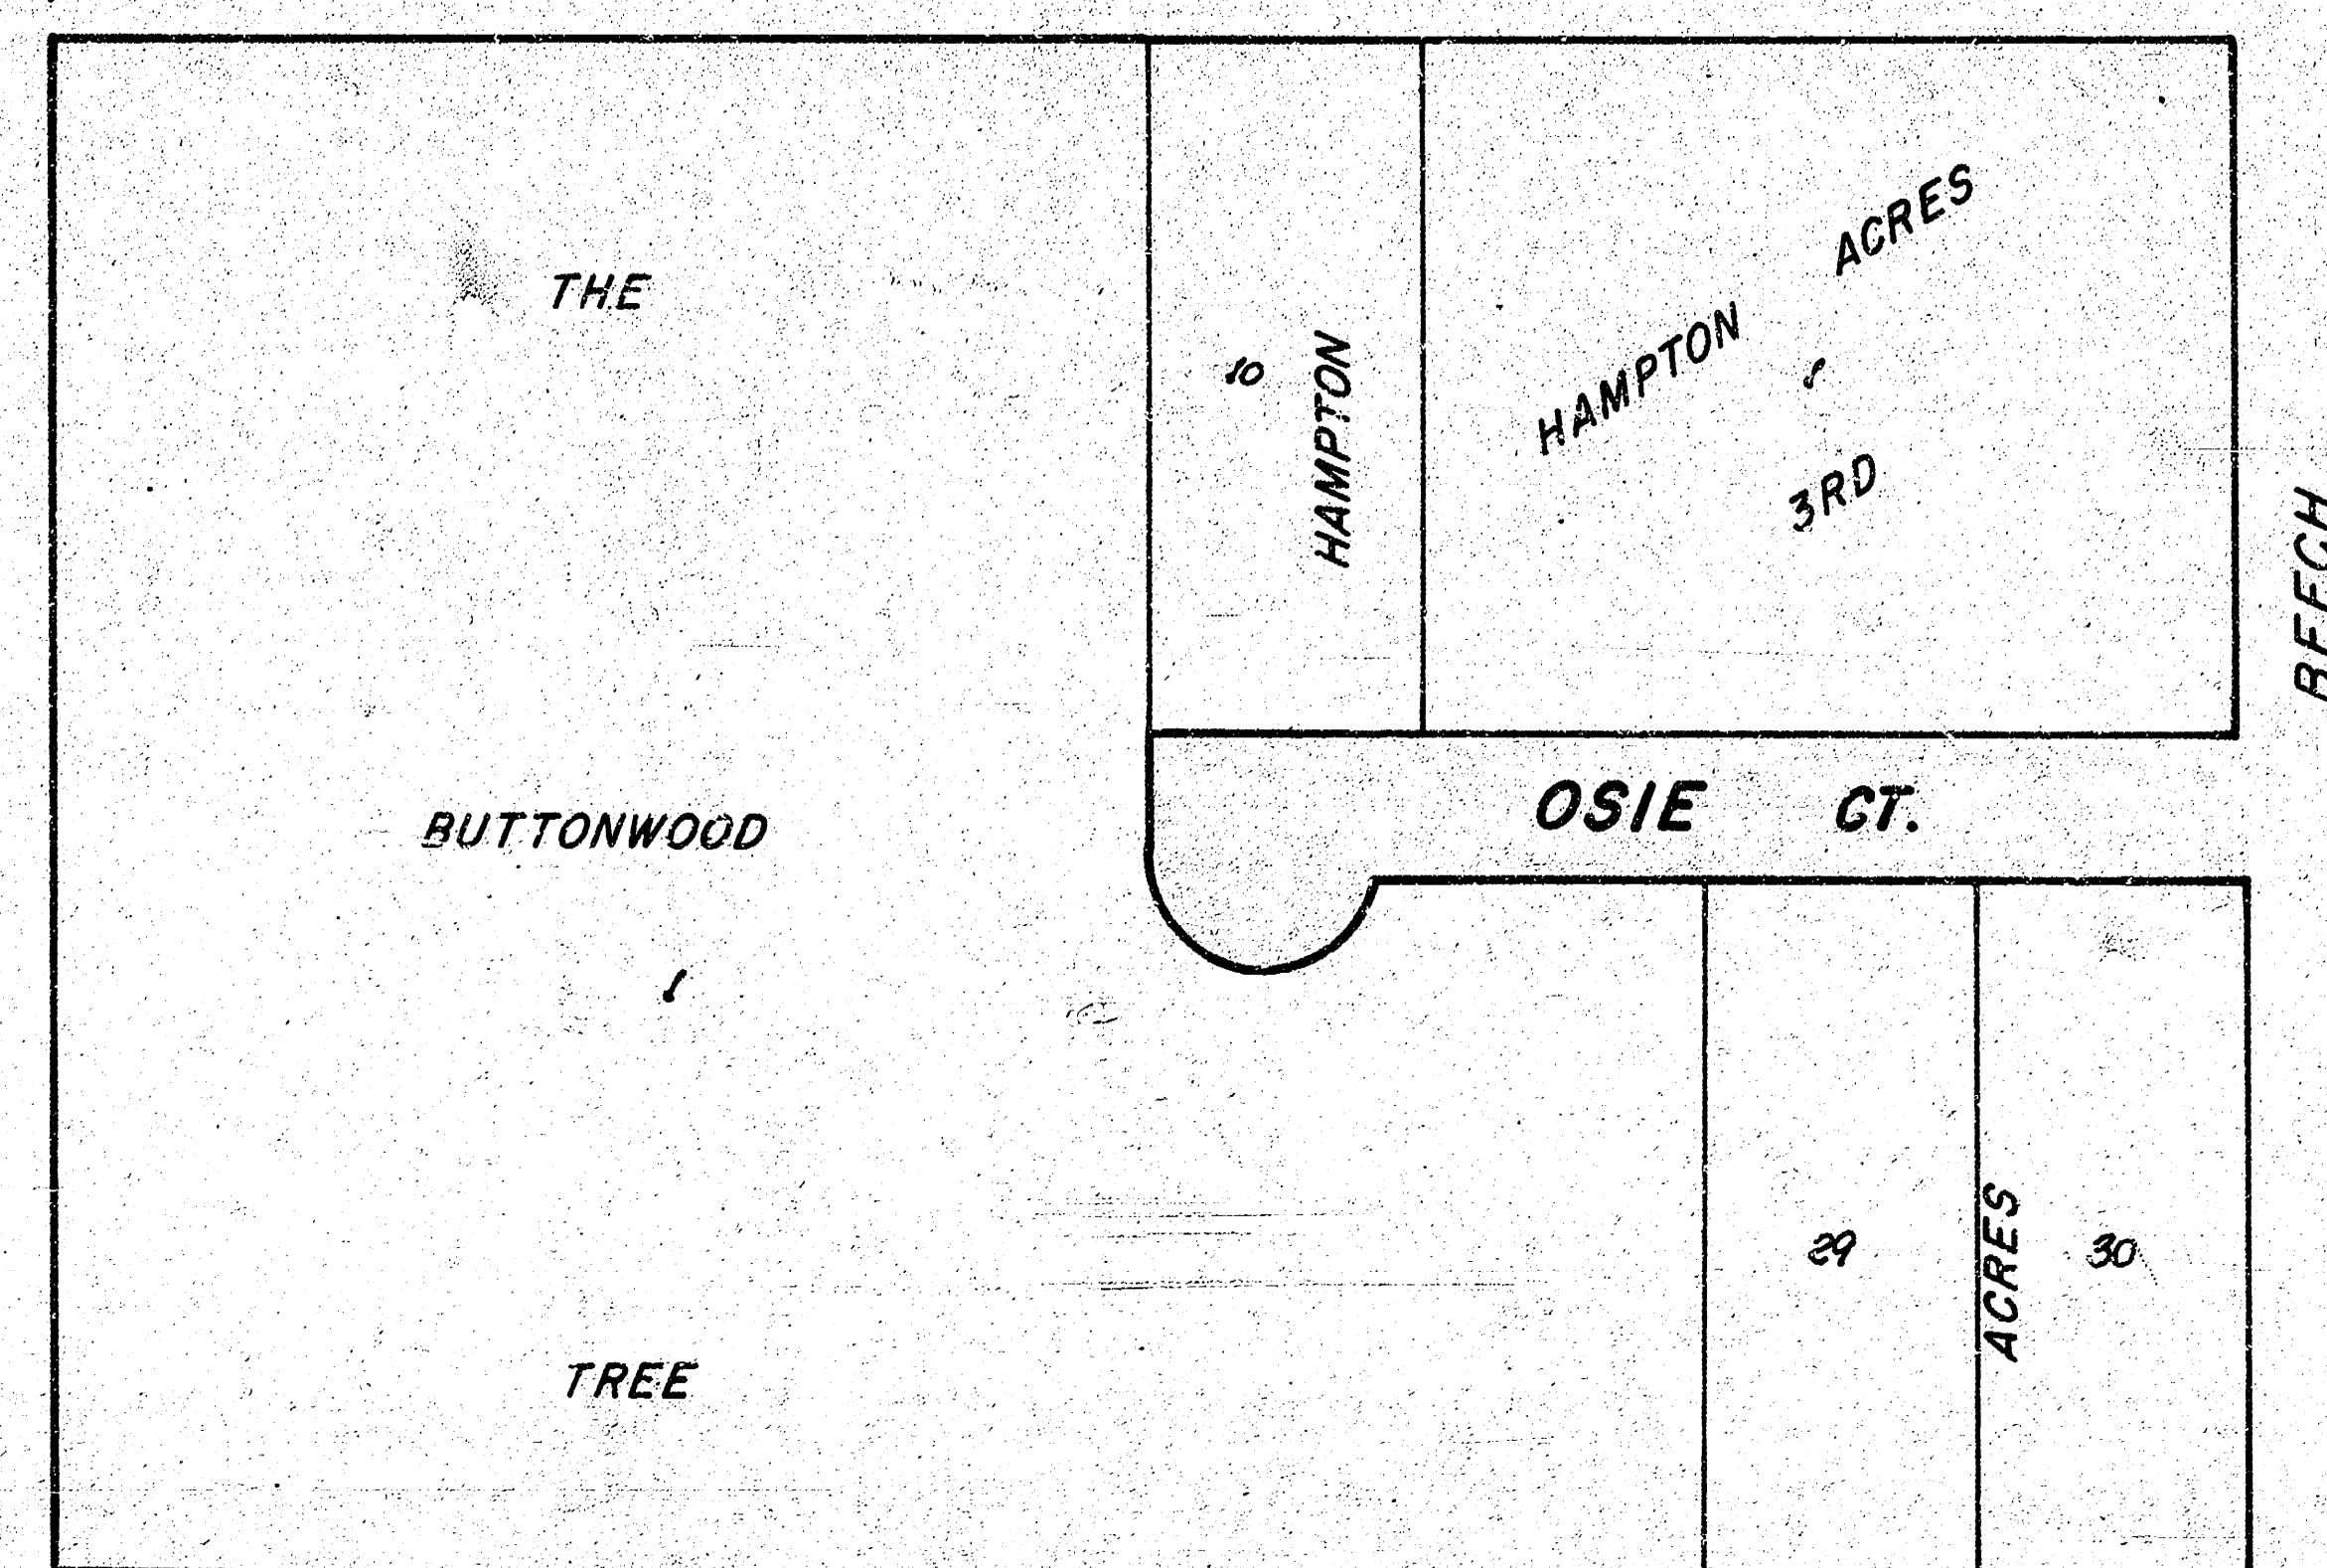

Date

BAUGHMAN COMPANY, P.A.
SURVEYING & ENGINEERING
316/262-7271 • 330 LAURA • WICHITA, KANSAS 67203

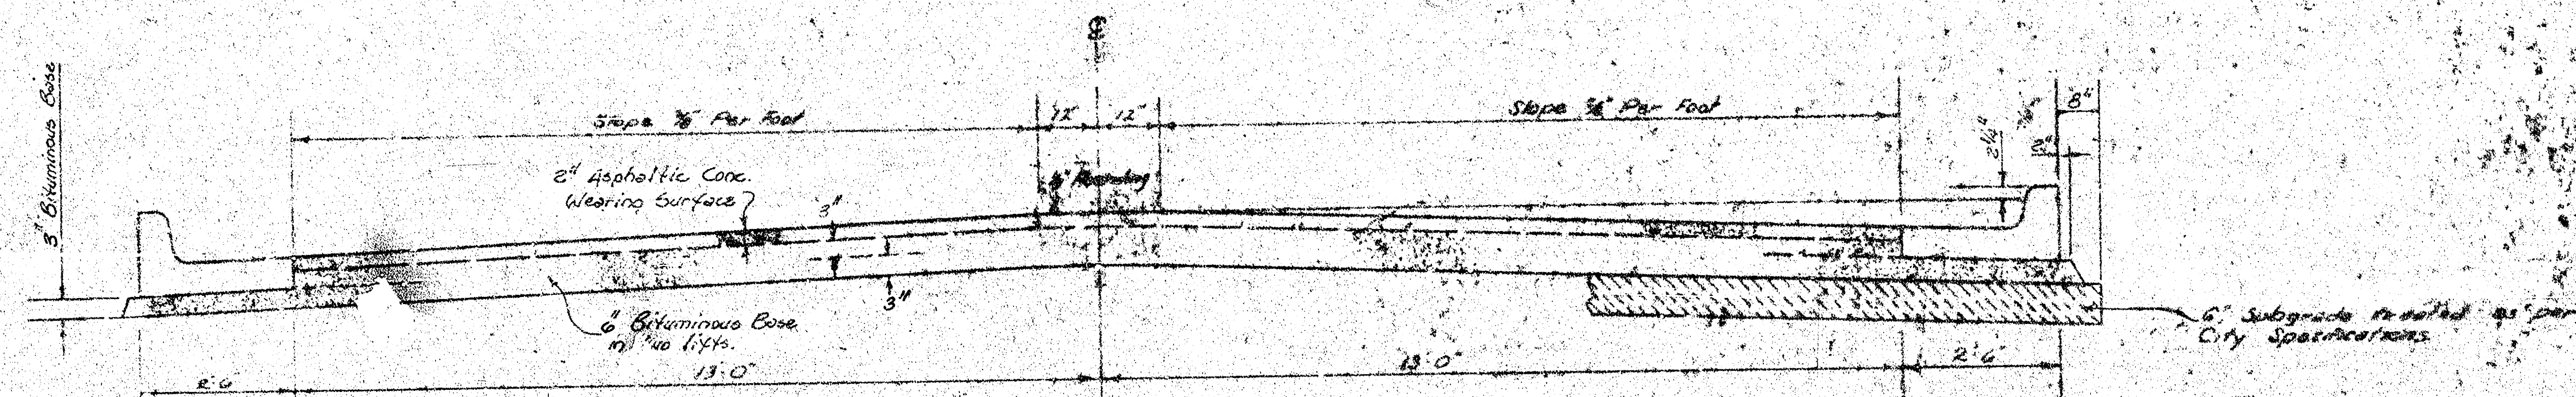


TYPICAL SECTION

3' ASPHALTIC CONCRETE PAVEMENT WITH BITUMINOUS BASE

A TACK COAT OF EMULSIFIED ASPHALT (SS-1H) SHALL BE APPLIED AT AN APPROXIMATE RATE OF 0.05 GALLONS PER SQ. YD. BETWEEN LIFTS OF ASPHALTIC MATERIALS WHEN ORDERED BY THE ENGINEER. TACK COAT WILL NOT BE PAID FOR DIRECTLY AND SHALL BE CONSIDERED AS SUBSIDIARY TO PRICE BID FOR ASPHALTIC PAVEMENT.


BITUMINOUS BASE AND ASPHALTIC CONCRETE WEARING SURFACE SHALL BE PLACED WITH A LAYDOWN MACHINE HAVING AUTOMATIC CONTROLS FOR CROWN AND GRADE. CONSTRUCTION JOINTS IN EACH LIFT SHALL BE STAGGERED A MINIMUM DISTANCE OF 1' WITH JOINTS IN PRECEDING LIFTS AND SUCH THAT A JOINT WILL BE CONSTRUCTED ON THE PAVEMENT CENTERLINE IN THE TOP LIFT.

DETAIL OF TRANSVERSE CONSTRUCTION JOINTS

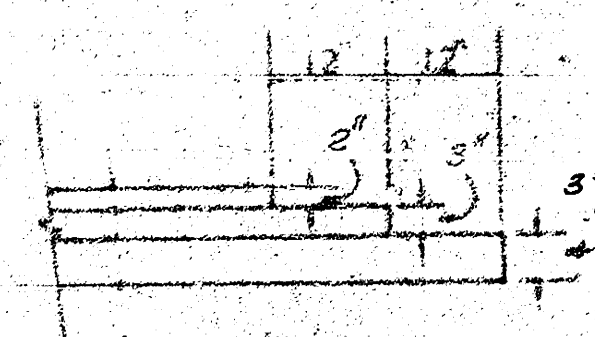


TRANSVERSE CONSTRUCTION JOINTS SHALL BE CONSTRUCTED IN FLEXIBLE BASE PAVEMENTS AT LOCATIONS WHERE PAVEMENT TEMPORARILY ENDS TO FACILITATE FUTURE PAVEMENT CONSTRUCTION AS SHOWN BY DETAIL. THE COST OF CONSTRUCTING THE TRANSVERSE CONSTRUCTION JOINTS SHALL NOT BE MEASURED OR PAID FOR DIRECTLY BUT SHALL BE INCLUDED IN THE BID PRICE FOR SQUARE YARDS OF ASPHALTIC CONCRETE PAVEMENT.

COMBINED CURB & GUTTER

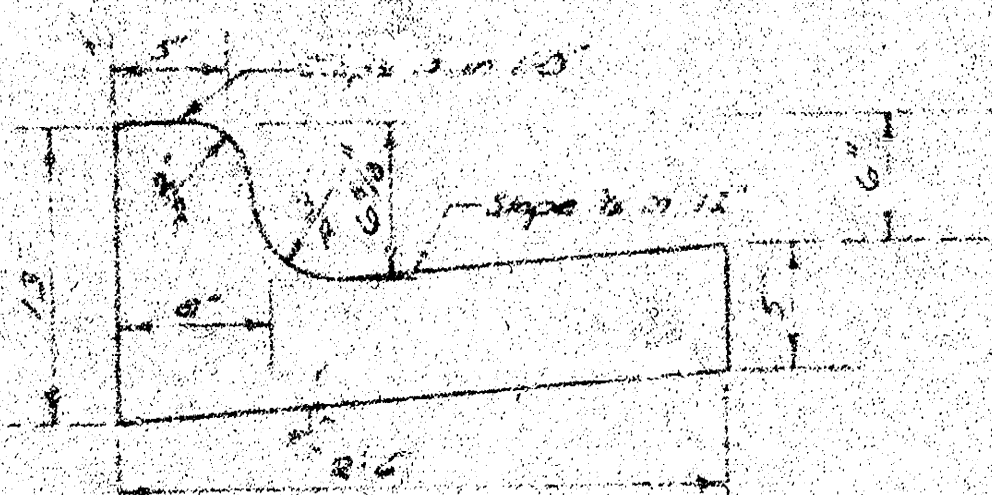

ROLL TYPE CURB & GUTTER

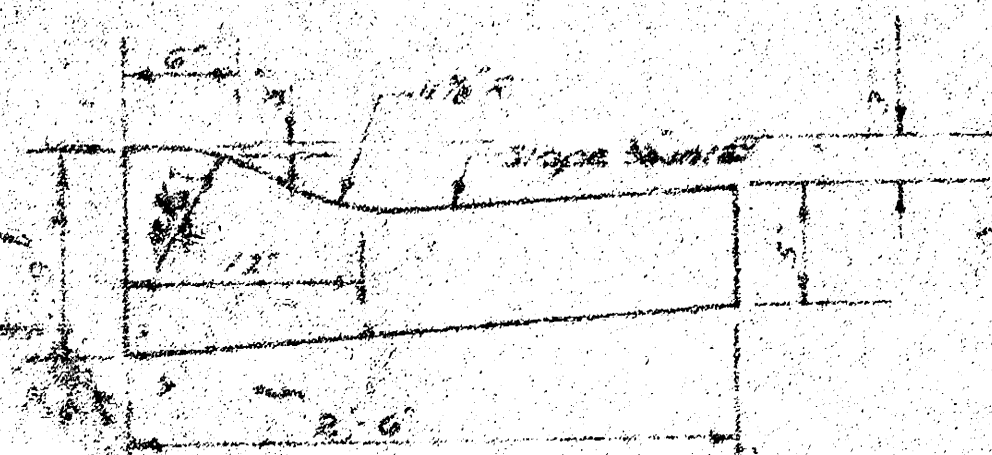


The A.C. pavement between the Comb. Curb & Gutter shall be paid as 3' A.C. Pavement (6' Bituminous Base). The Bituminous Base under the Comb. Curb & Gutter shall be paid as 3' Bituminous Base.

Survey: TCO 33 84-1
Plan: Buchanan Co. July 1981

B.P. 119.46 R.R. Spk. W. Fe. P.P. S.E. Corner Osie & Cypress.
B.P. 172.23 R.R. Spk. P.P. W. Cor. Osie & Beech.

NO MORE THAN 4-20' DRIVES TO BE CONSTRUCTED.

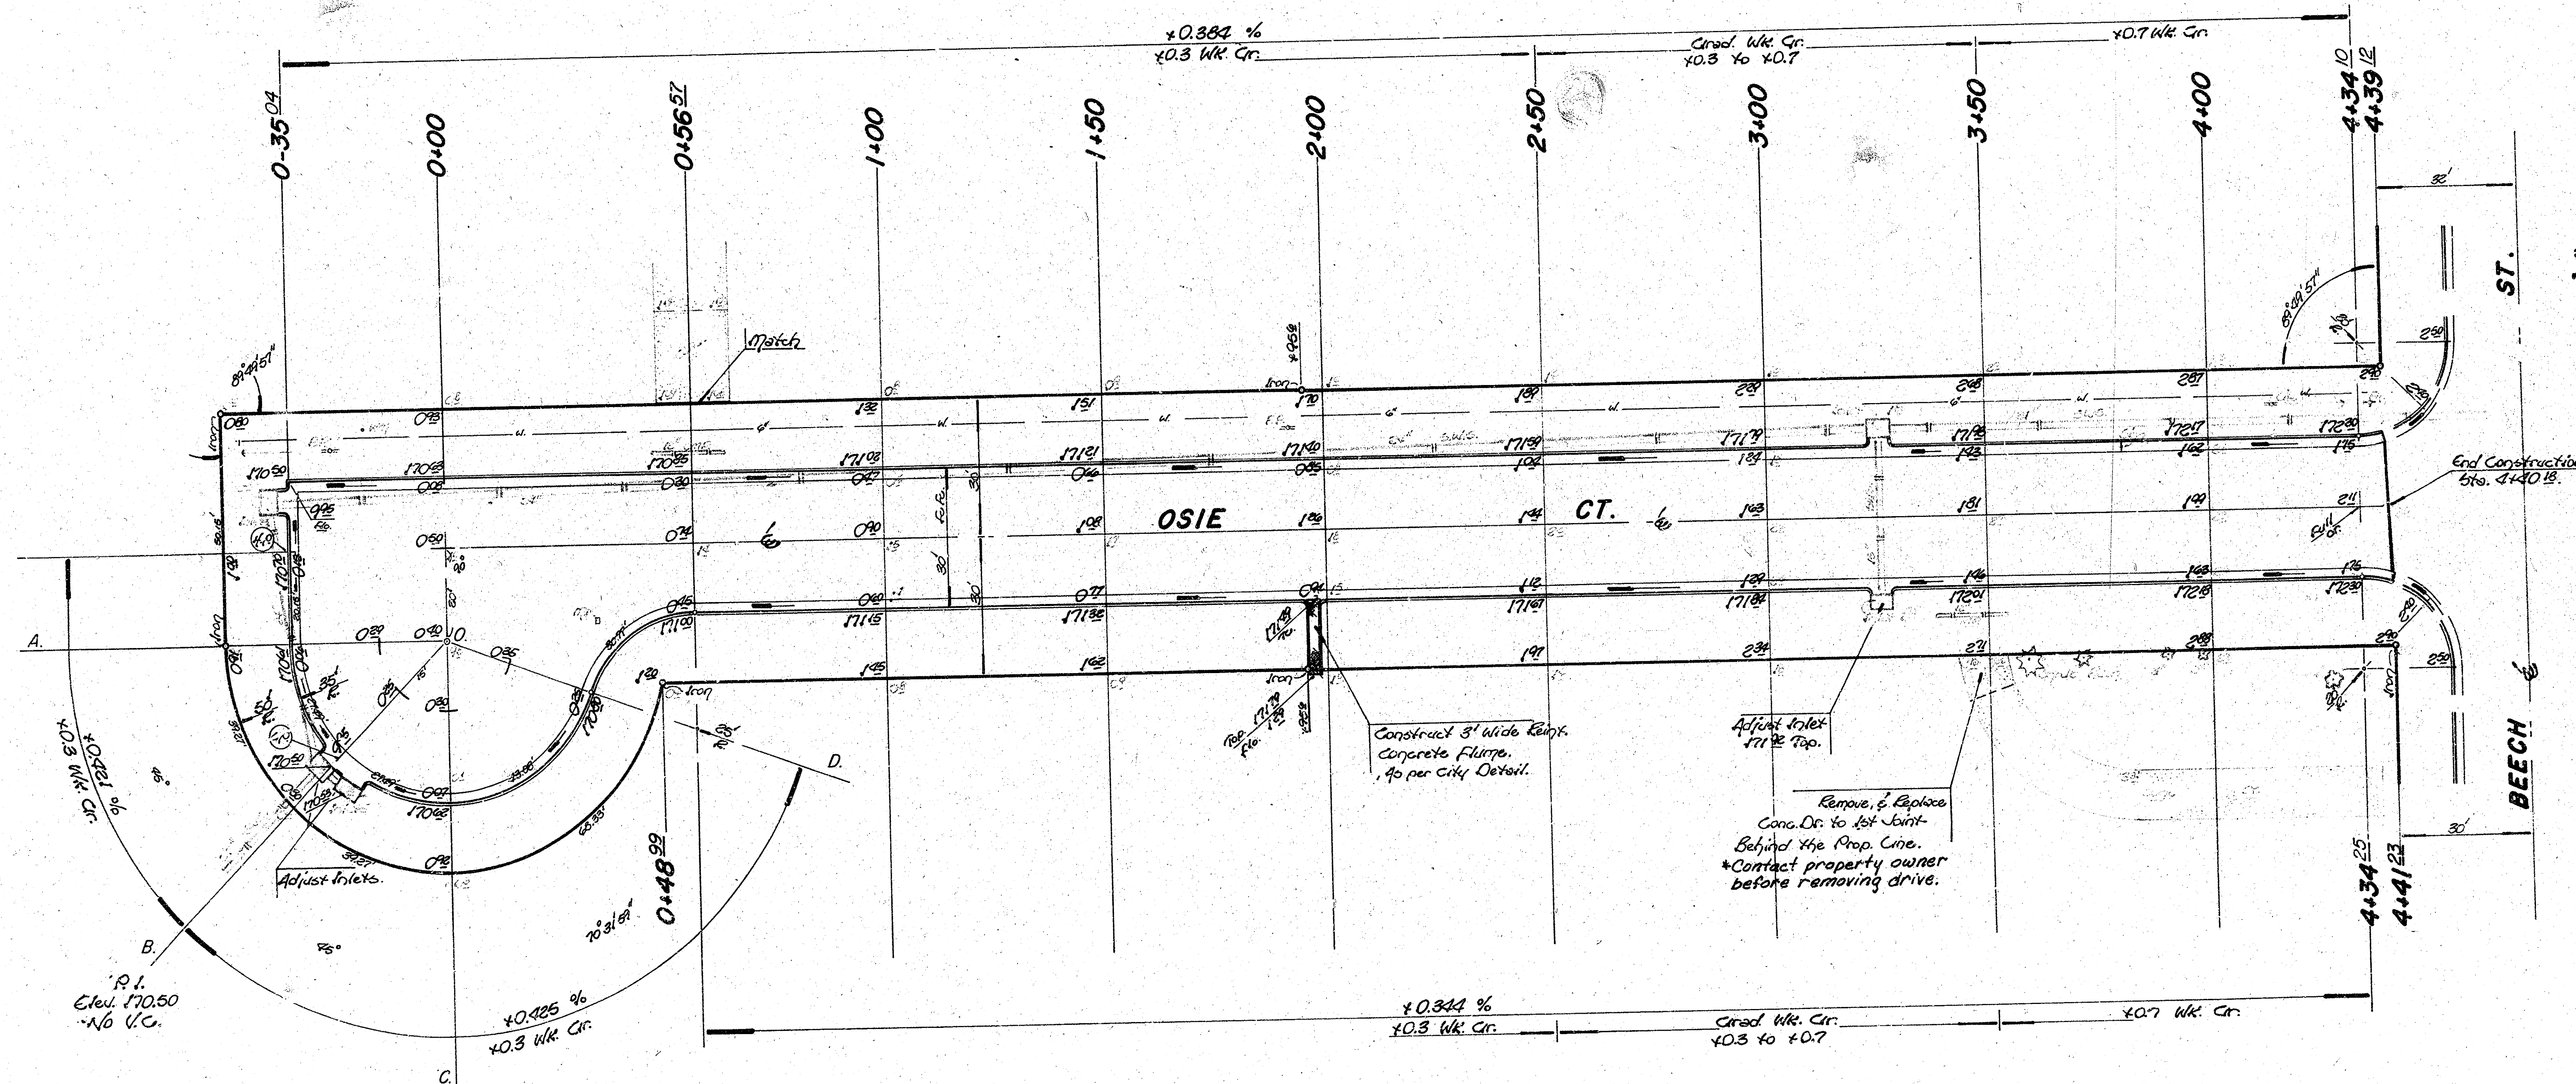

Earthwork Quantities		
Excavation	= 746.5 cu	Comp. Fill = 0
+10%	= 74.7 cu	
Total	= 821.2 cu	
Manipulation = 1979.0 cu		

Note -
Mailboxes to be Removed & Replaced. Entrance drive pipes to be Removed.
Property owners to be contacted prior to doing any work behind the R.
Pies to be taken and any traps moved or destroyed due to construction shall be replaced.
Contractor to check w. Gas Service Co. for possible gas line construction.
Construction to be co-ordinated w. that of Beech St.
□ Indicates Drive Removal.

OSIE CT.
472-76-245-80803-000-000-001

FILMED FROM THE BEST
AVAILABLE COPY