



B.M. = 156.38 "O" IN CONST. E. END S. CB. ZIMMERLY AT 0+00

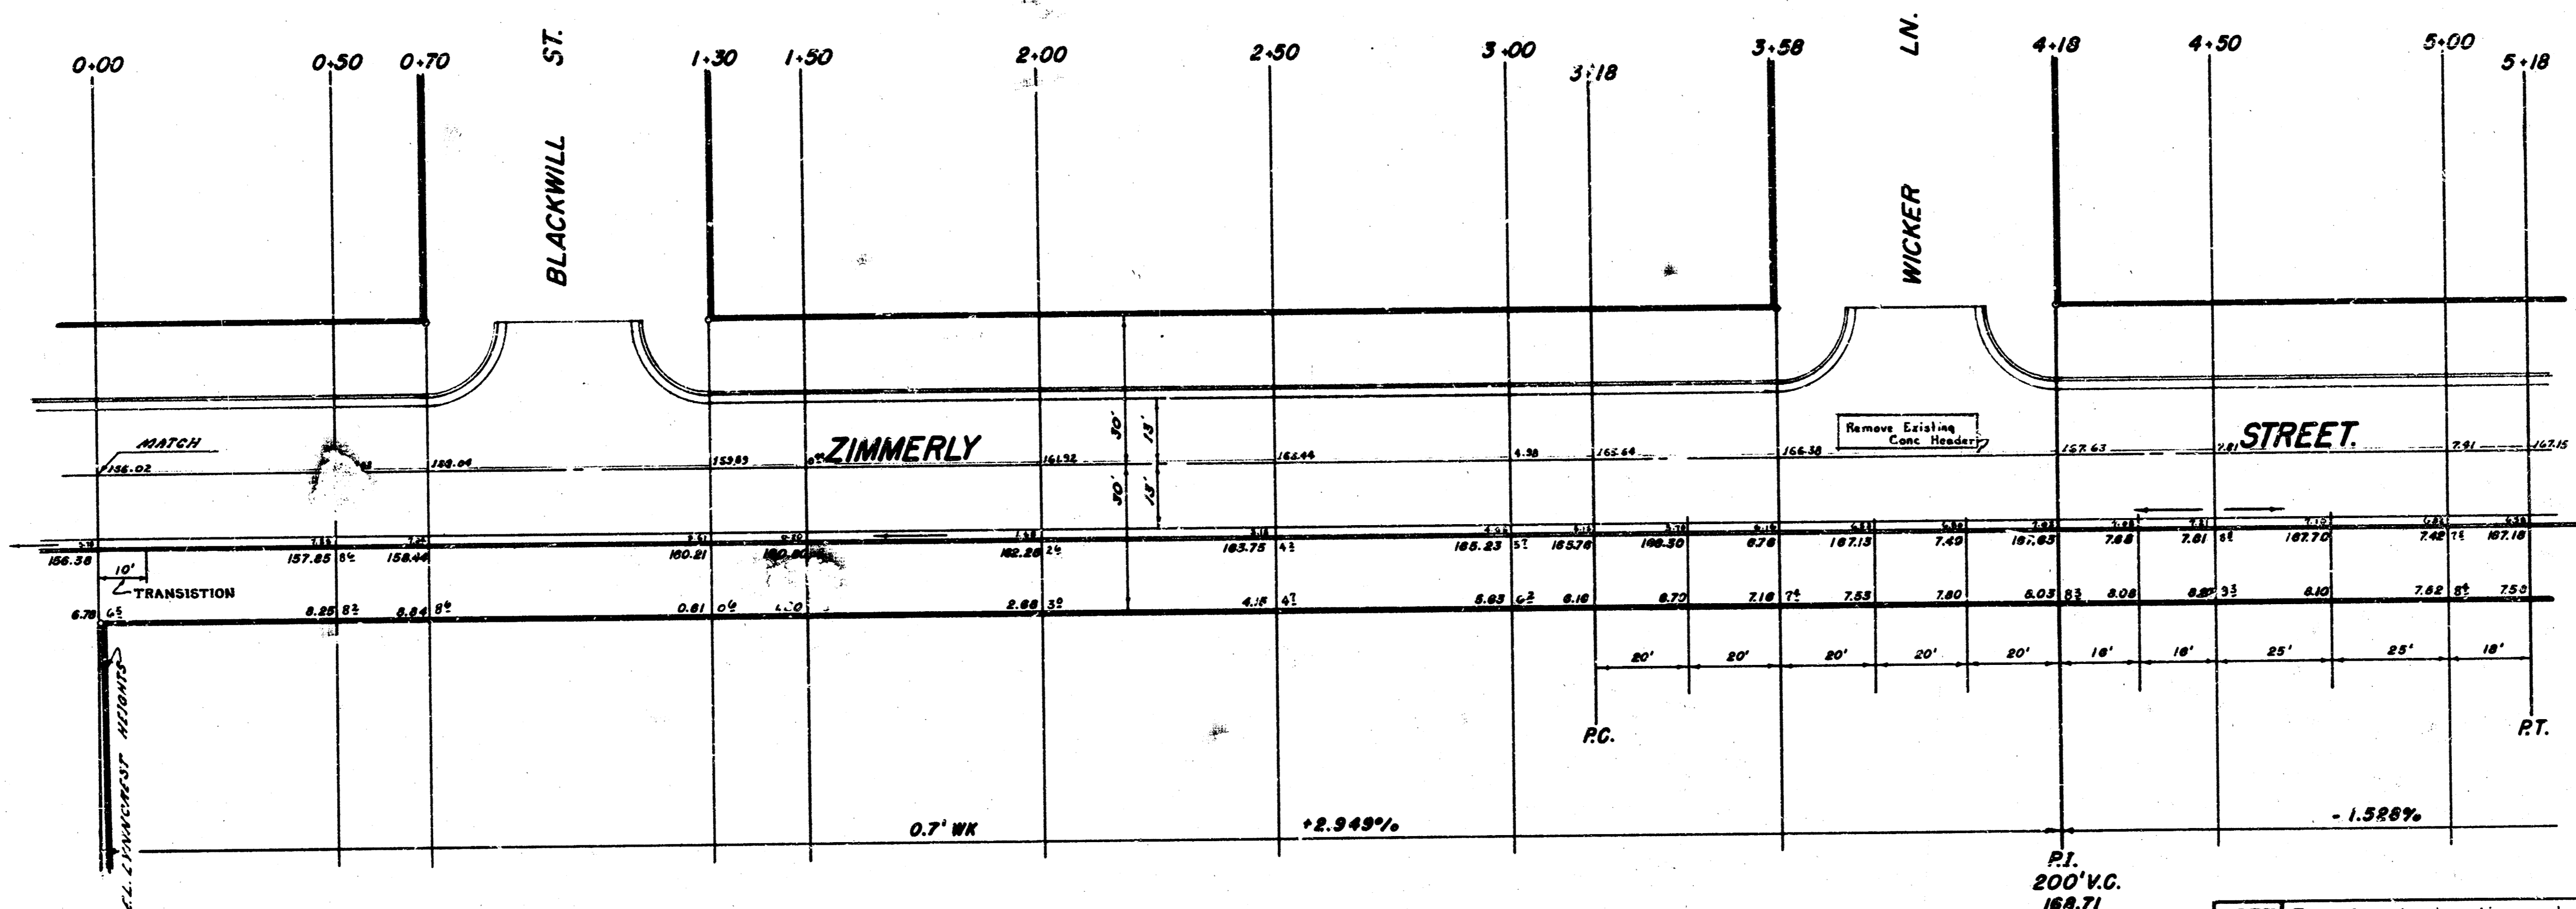

WICKER LN. No. 2
 City of Wichita
 Kansas

THIS PLAN IS
 A PART OF THE
 RECORD OF THE
 CITY OF WICHITA
 KANSAS
 FILE NO. 100-100000
 4-1-19

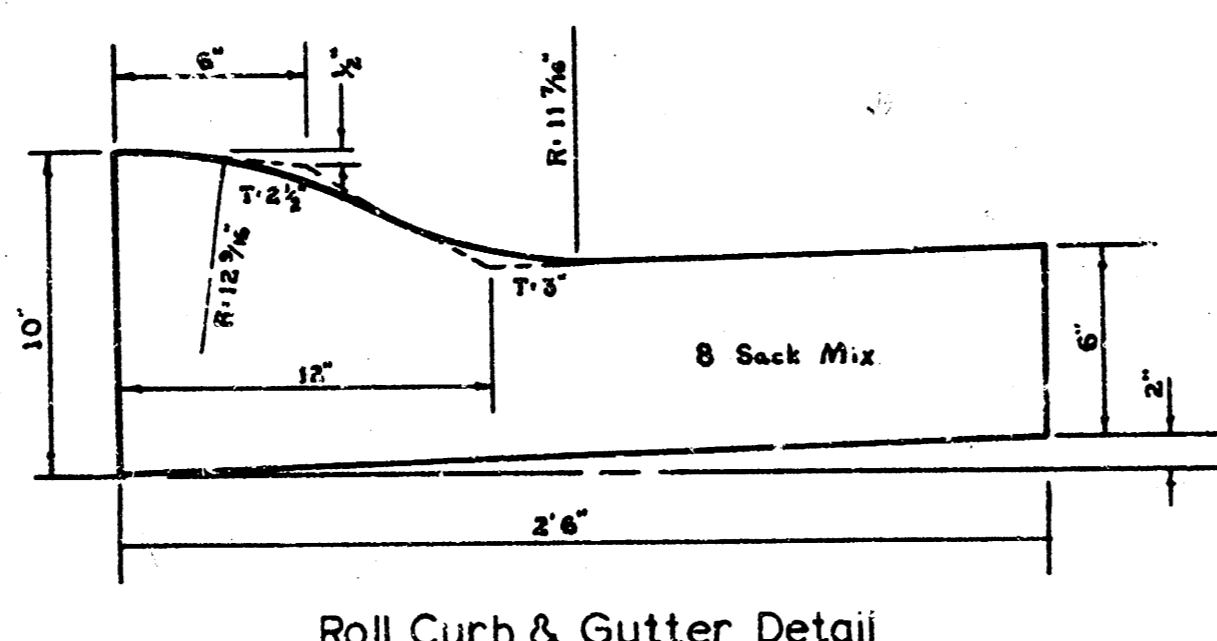




LIST OF QUANTITIES
Driveways Not Included in Estimate

Quantity	Unit	Item
660	Lin Ft	Roll Cb & Gutter
940	Sq Yds	Asph Conc Pavement
520	Cu Yds	Excavation
10	Cu Yds	Comp Fill
2250	Lbs	Reinf Steel
11	Tons	Asphalt
650	Lin Ft	Header Rem.

NOTE: Top of curb elevations shown
 are for full curb.
 CONSTRUCT ROLL-TYPE CURB
 0.3' to FLO.

So. 1/2 ZIMMERLY STREET.
 E.L. Lyncrest Heights to W.L. Rosalie.
13' - 2' - 15' ASPHALTIC-CONC.
 City of Wichita, Kansas
 B.E. SMITH City Engineer
 Date: 3-1-19 Project PRIVATE

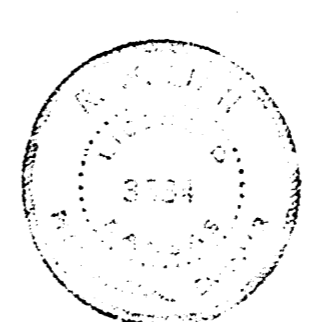

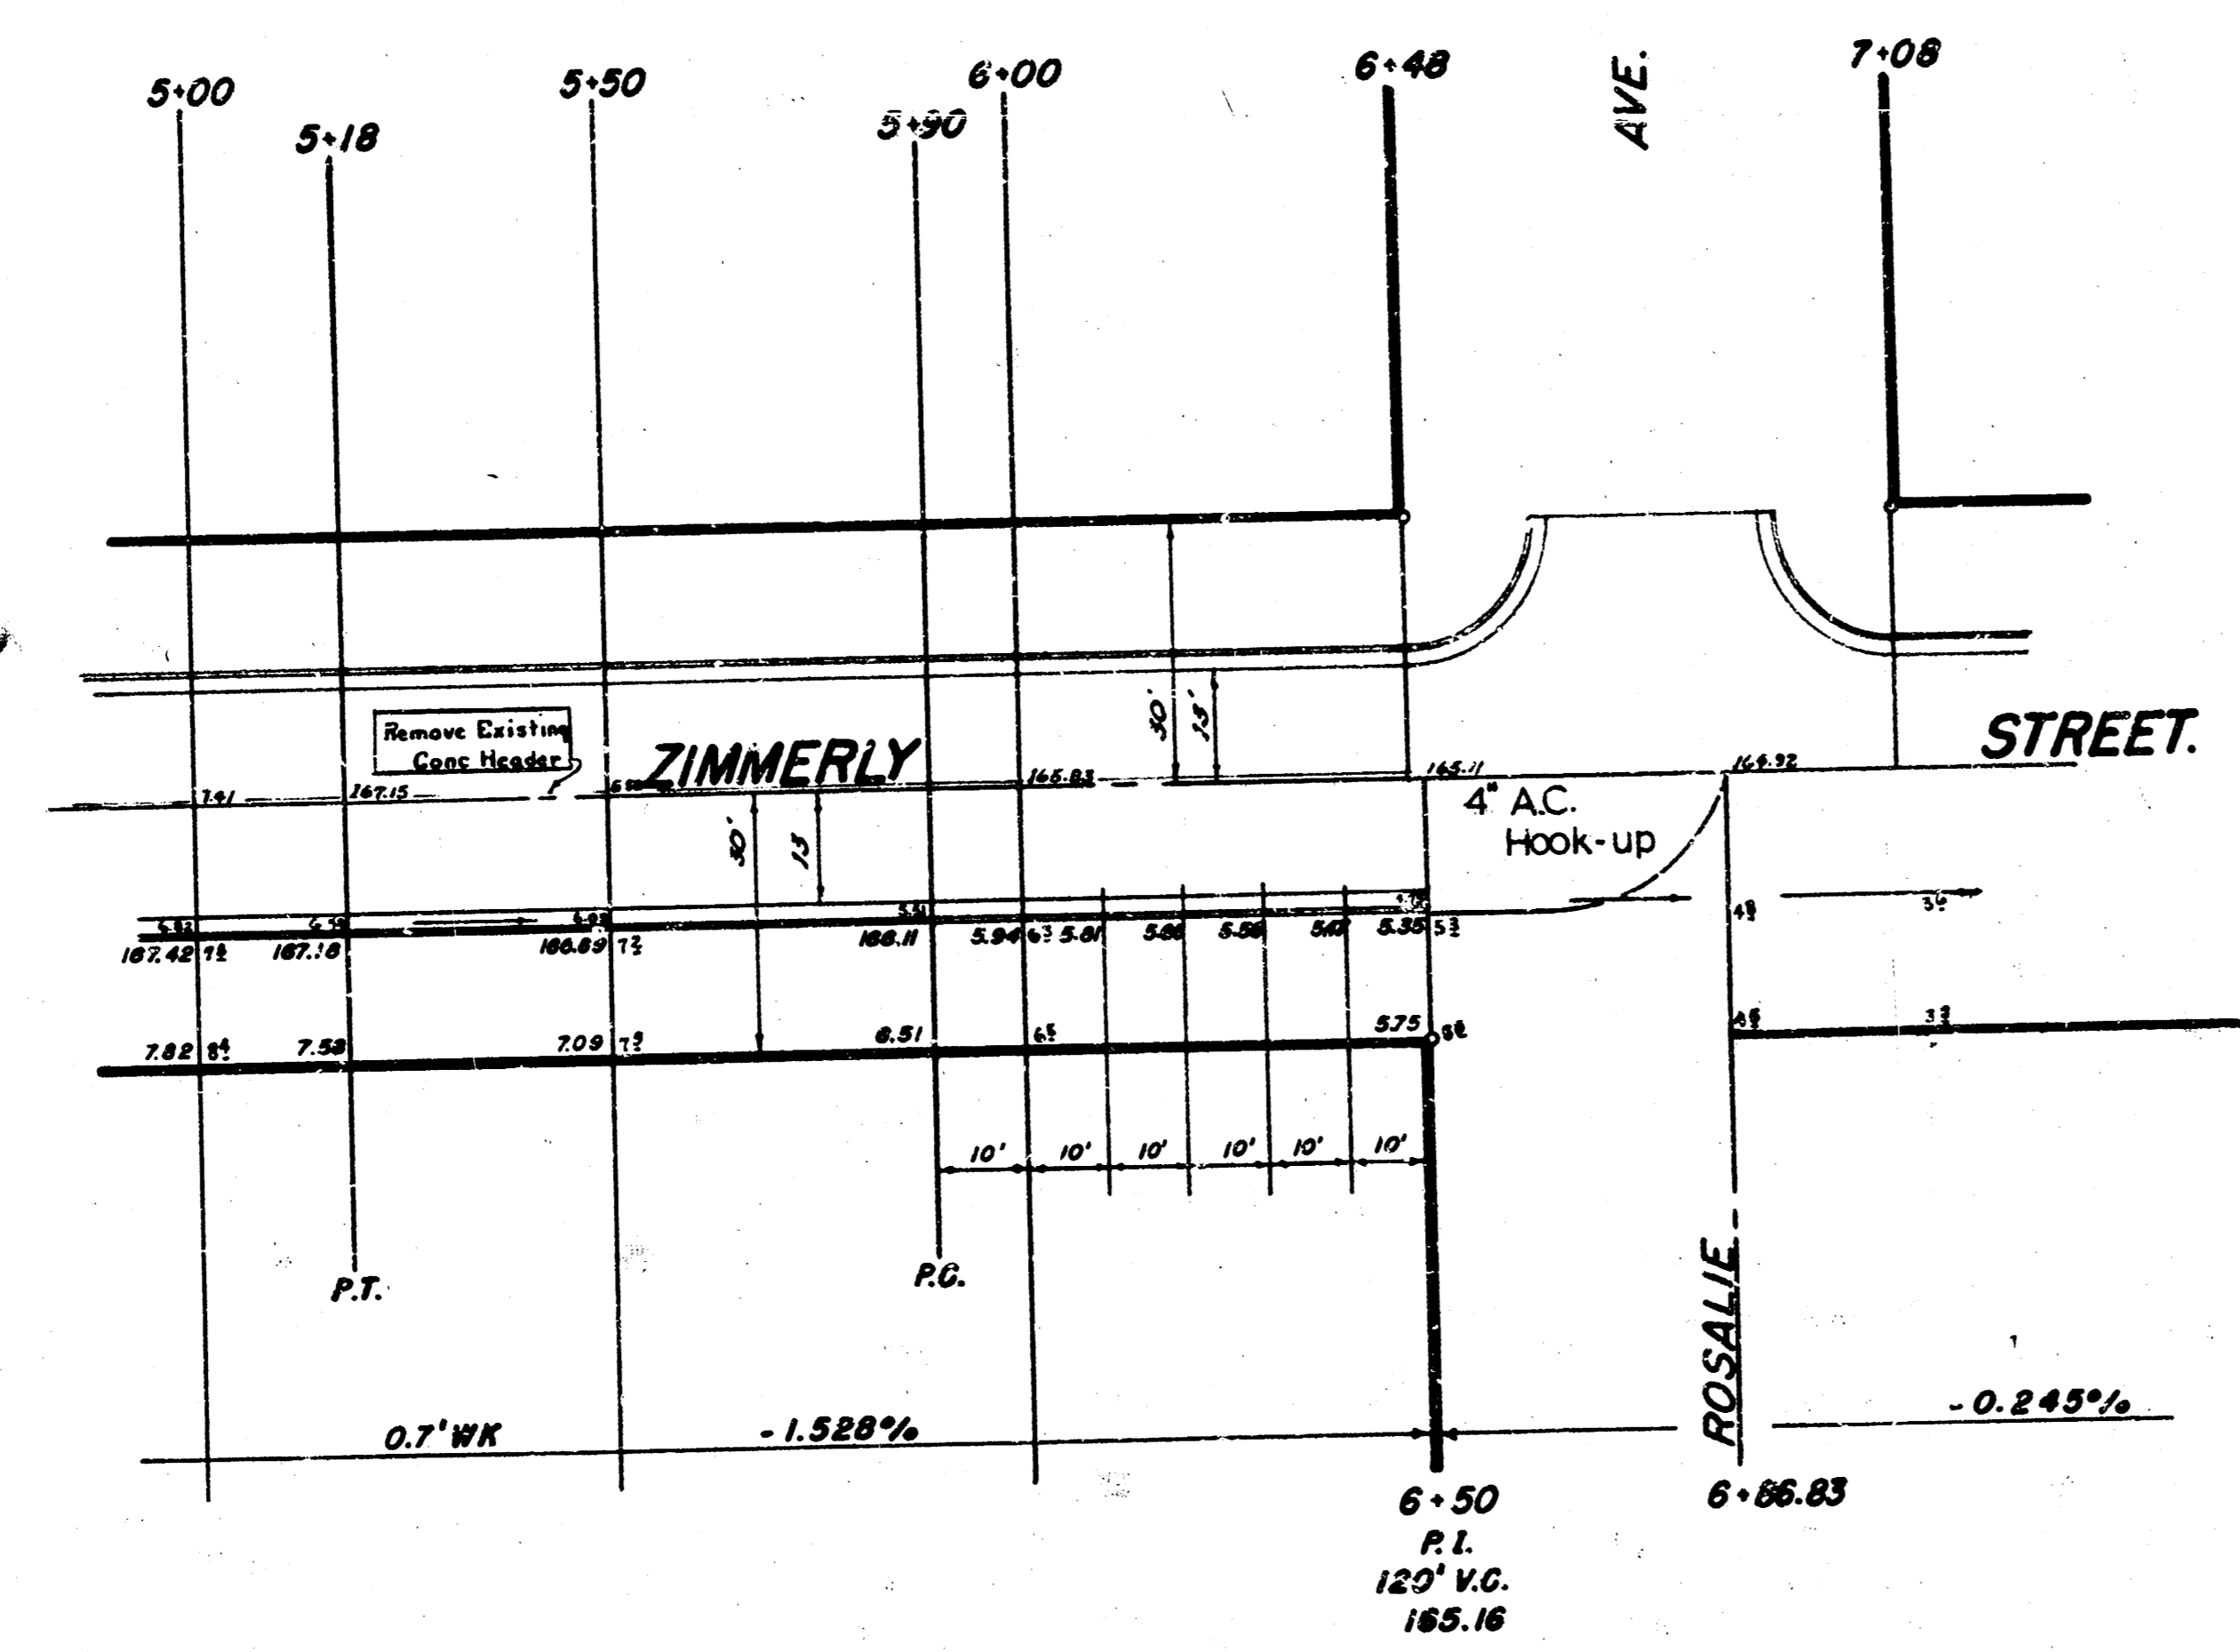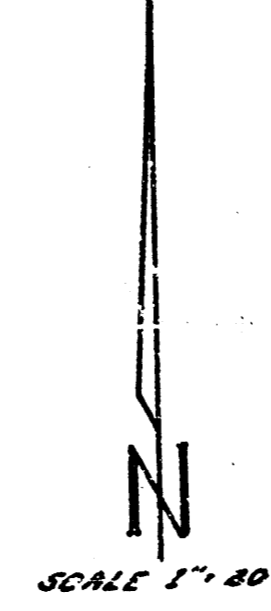

NOTE Ditch East to Drain.
Construct 4 inch A.C. Hook-up.