
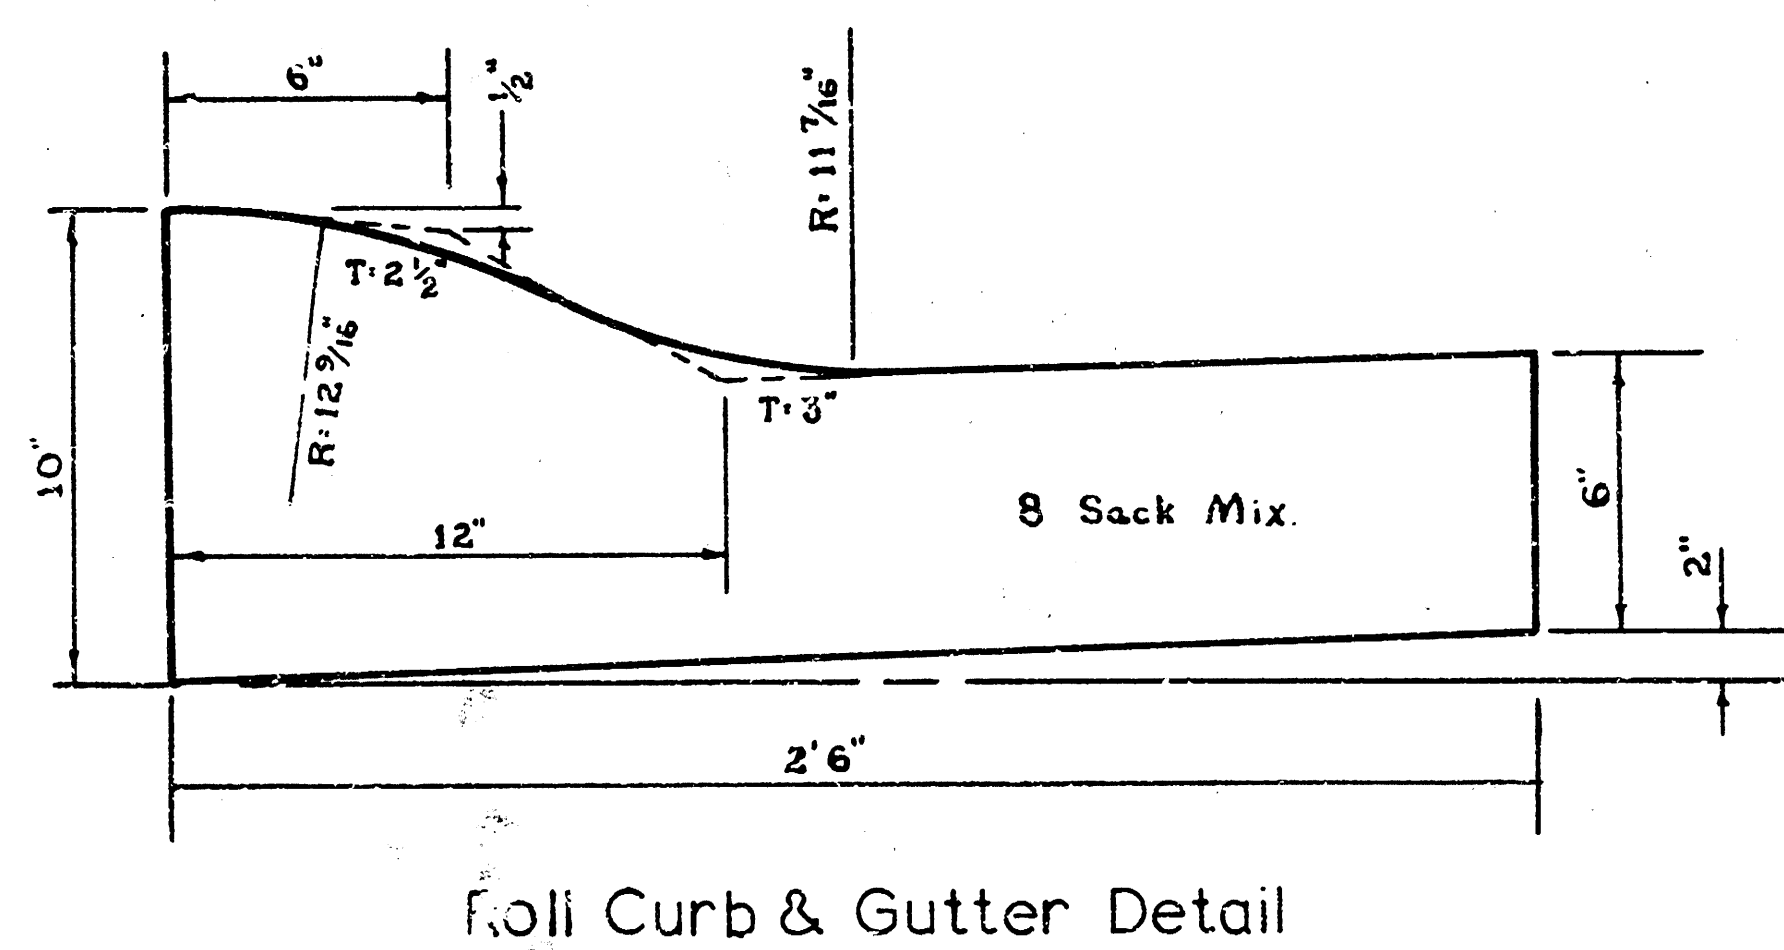


B.M. = 156.38 "0" IN CONST. E. END S. CB. ZIMMERLY AT 0+00

N
SCALE 1" = 20'

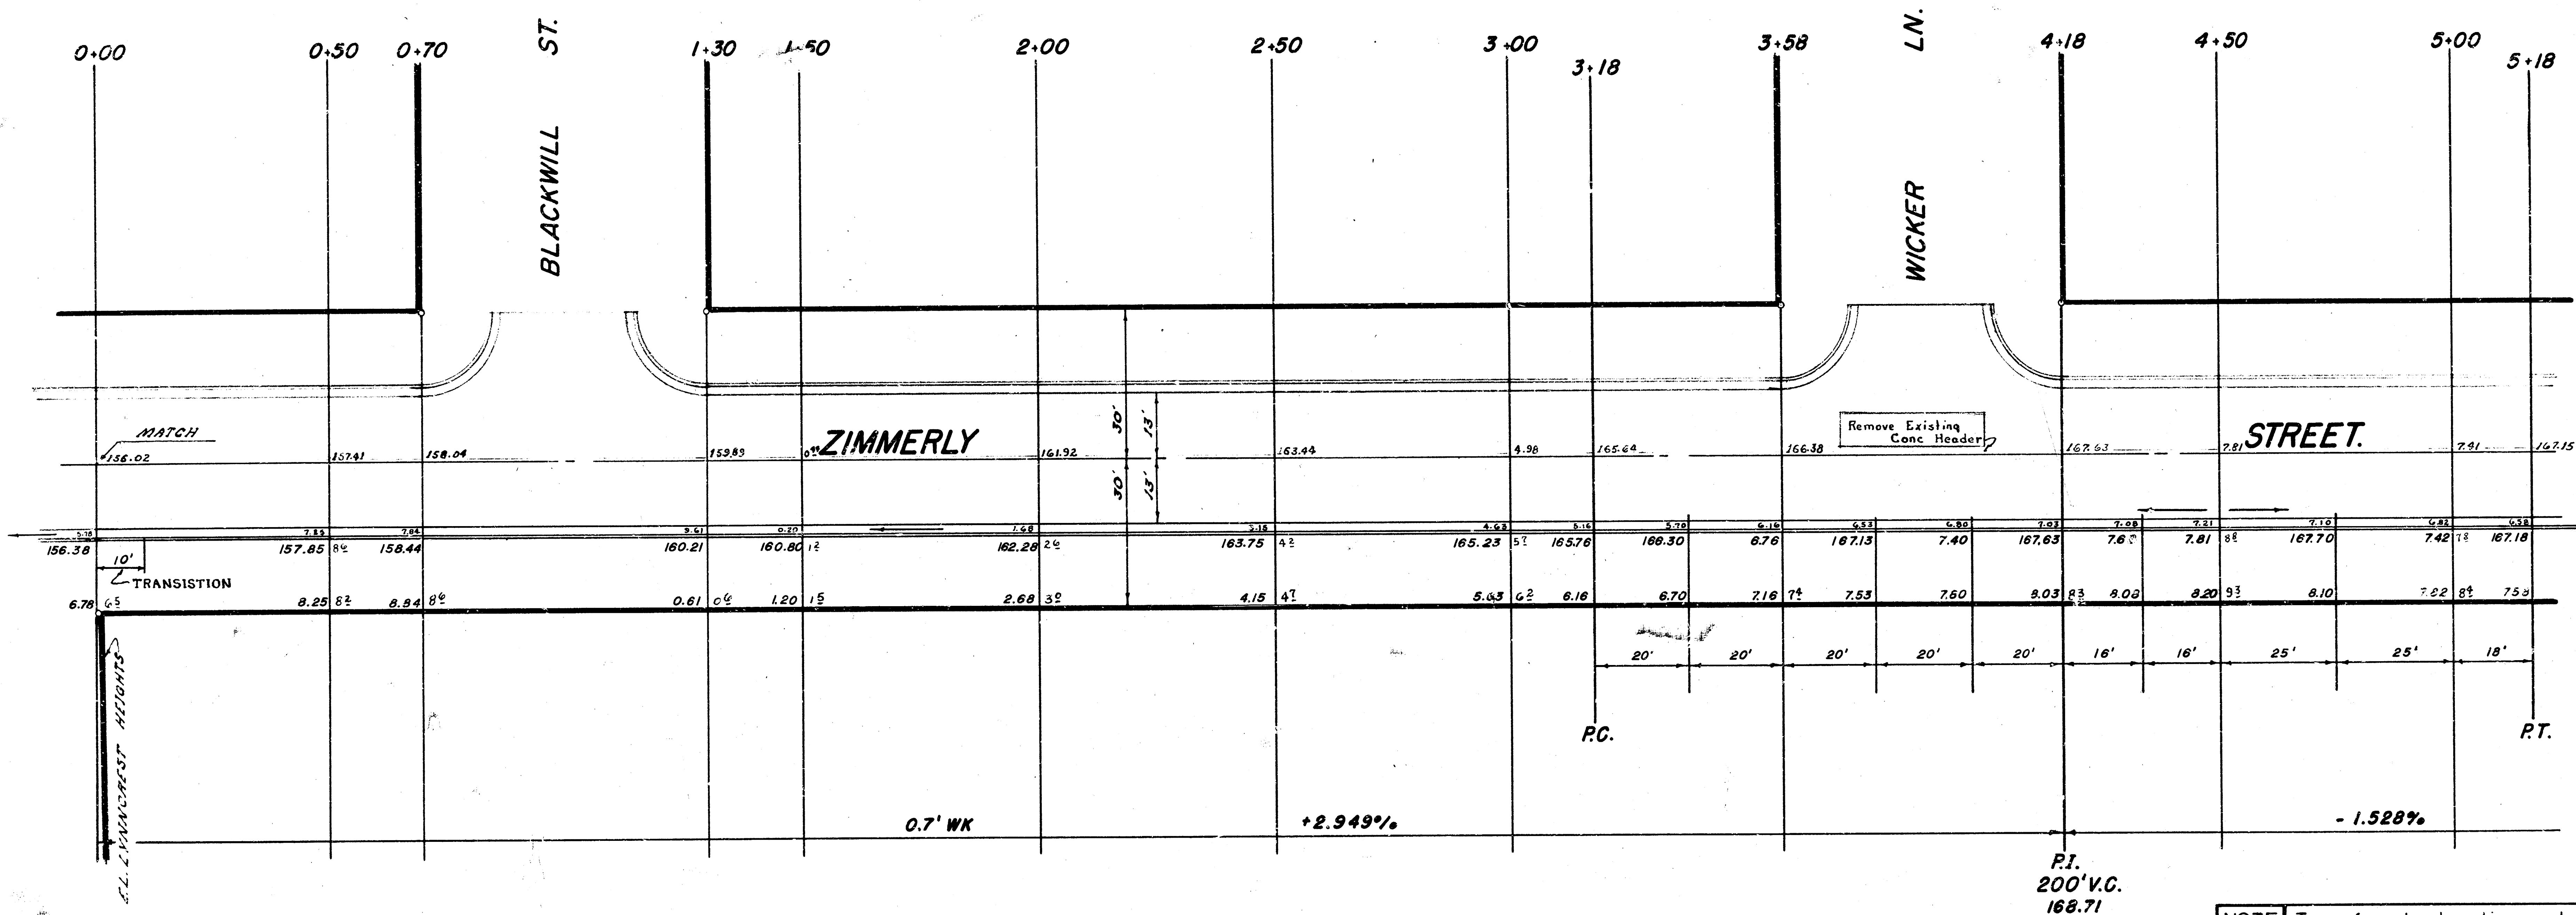

LIST OF QUANTITIES		
Driveways Not Included in Estimate		
Quantity	Unit	Item
650	Lin Ft	Roll Cb & Gutter
940	Sq Yds	Asph Conc Pavement
520	Cu Yds	Excavation
10	Cu Yds	Comp Fill
3250	Lbs	Reinf Steel
11	Tons	Asphalt
650	Lin Ft	Header Rem.

NOTE: Top of curb elevations shown are for full curb.
CONSTRUCT ROLL-TYPE CURB 0.3' to FLO.

S. 1/2 ZIMMERLY STREET
E.L. Lynncrest Heights to W.L. Rosale.

13' - 2' - 15' ASPHALTIC-CONC

City of Wichita, Kansas

B.E. SMITH City Engineer

Date: Project PRIVATE

Sheet 1 of 3

