

GENERAL NOTES

Contractor will be required to provide a minimum advance notice of twenty-four (24) hours to utility companies prior to starting any excavation as follows:

Kansas One-Cof 667-2470

The Contractor must notify the following in case of an emergency:



Civ. Communications 262-6661
 Kansas Gas Service 383-8900
 K.G.S. Electric 383-8600
 Peoples Natural Gas Company 1-800-363-0357
 Southwestern Bell Telephone Company 1-800-286-8313
 City of Wichita Water Department 262-6000
 City of Wichita Sewer Maintenance 262-6000

Underground utility service lines and overhead utility pole lines are to be adjusted as necessary by others prior to construction unless the plans specifically identify a utility to be adjusted by its owner during construction. Existing utilities and their location, as shown on the plans, represent the best information obtainable for design. Location information has been obtained from the various utility companies and is either from company record drawings or company-provided field locations. The Contractor will be required to work around existing utilities within the right-of-way which do not conflict with proposed construction.

Rubble from the removal of miscellaneous structures and access excavation which is to be installed shall be disposed of on sites to be provided by the Contractor. These sites shall be approved by the Engineer as to suitability, appearance and site location. Locations that, in the opinion of the Engineer, will cause an unsightly appearance will not be approved.

All disposal sites must be approved by the Kansas Department of Health and Environment. Material either stockpiled or disposed of in a floor pit would require a Kansas State Board of Agriculture permit. Any material dumped in waters of the United States or otherwise is subject to U.S. Corps permitting regulations. Any material buried or stockpiled beyond approved of Engineers construction limits would require additional archeological investigations unless buried in a previously approved borrow location.

The Contractor shall seed, fertilize and mulch all disturbed areas upon completion of construction. Incidental to the bid item for "Site Clearing and Restoration".

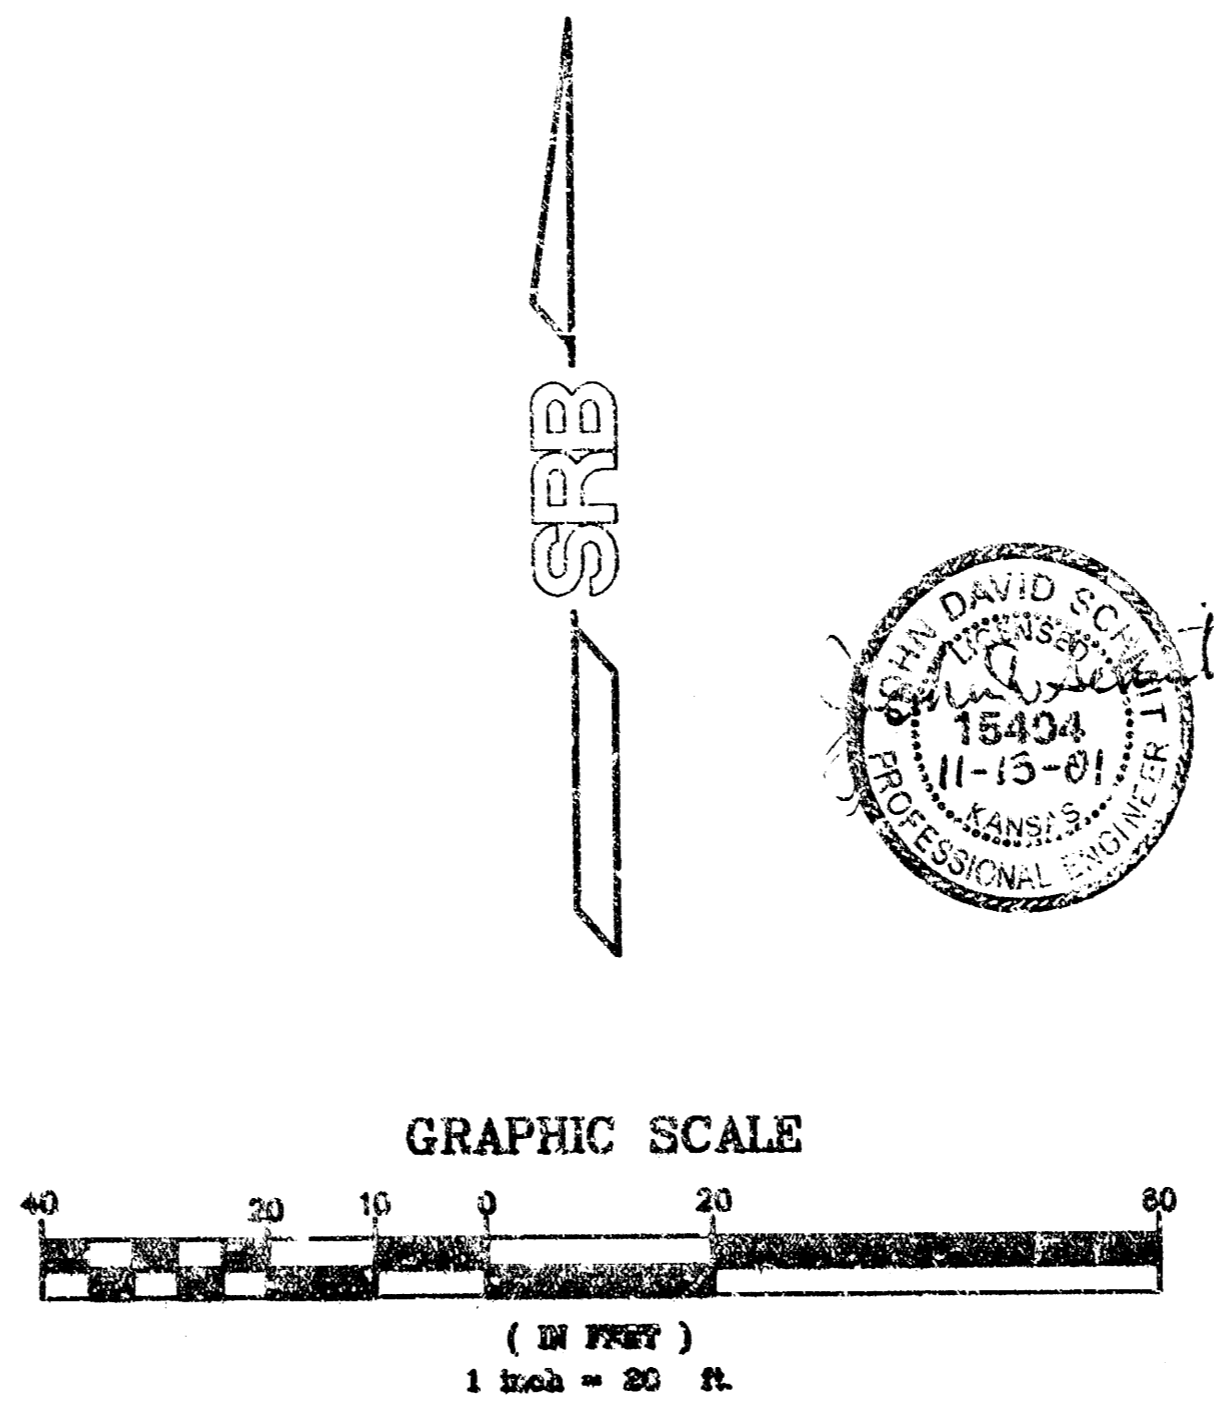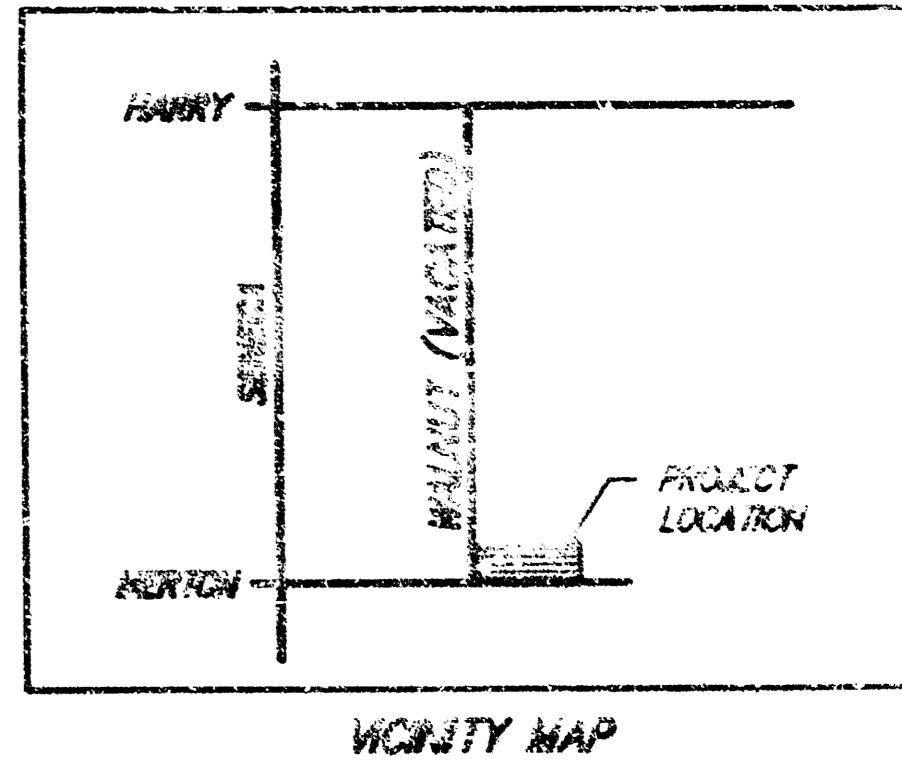


APPROVED AS NOTED
 BY CITY ENGINEER OF WICHITA

Sanitary Sewers _____
 Storm Sewers VRH 11/13/01
 Driveway Approaches _____
 Water Mains _____
 Paving _____

NOTE TO CONTRACTORS

Inspection and testing for this project are to be provided by a Licensed Consulting Engineering Firm under contract with the Owner/Invoicer. Said inspection to be in accordance with the City of Wichita standard construction engineering practices and certified by a Licensed Professional Engineer. No work shall be performed in disturbed excavations or public right-of-way by the Contractor without such inspection, nor shall any work be commenced without written authorization by the City Engineer.

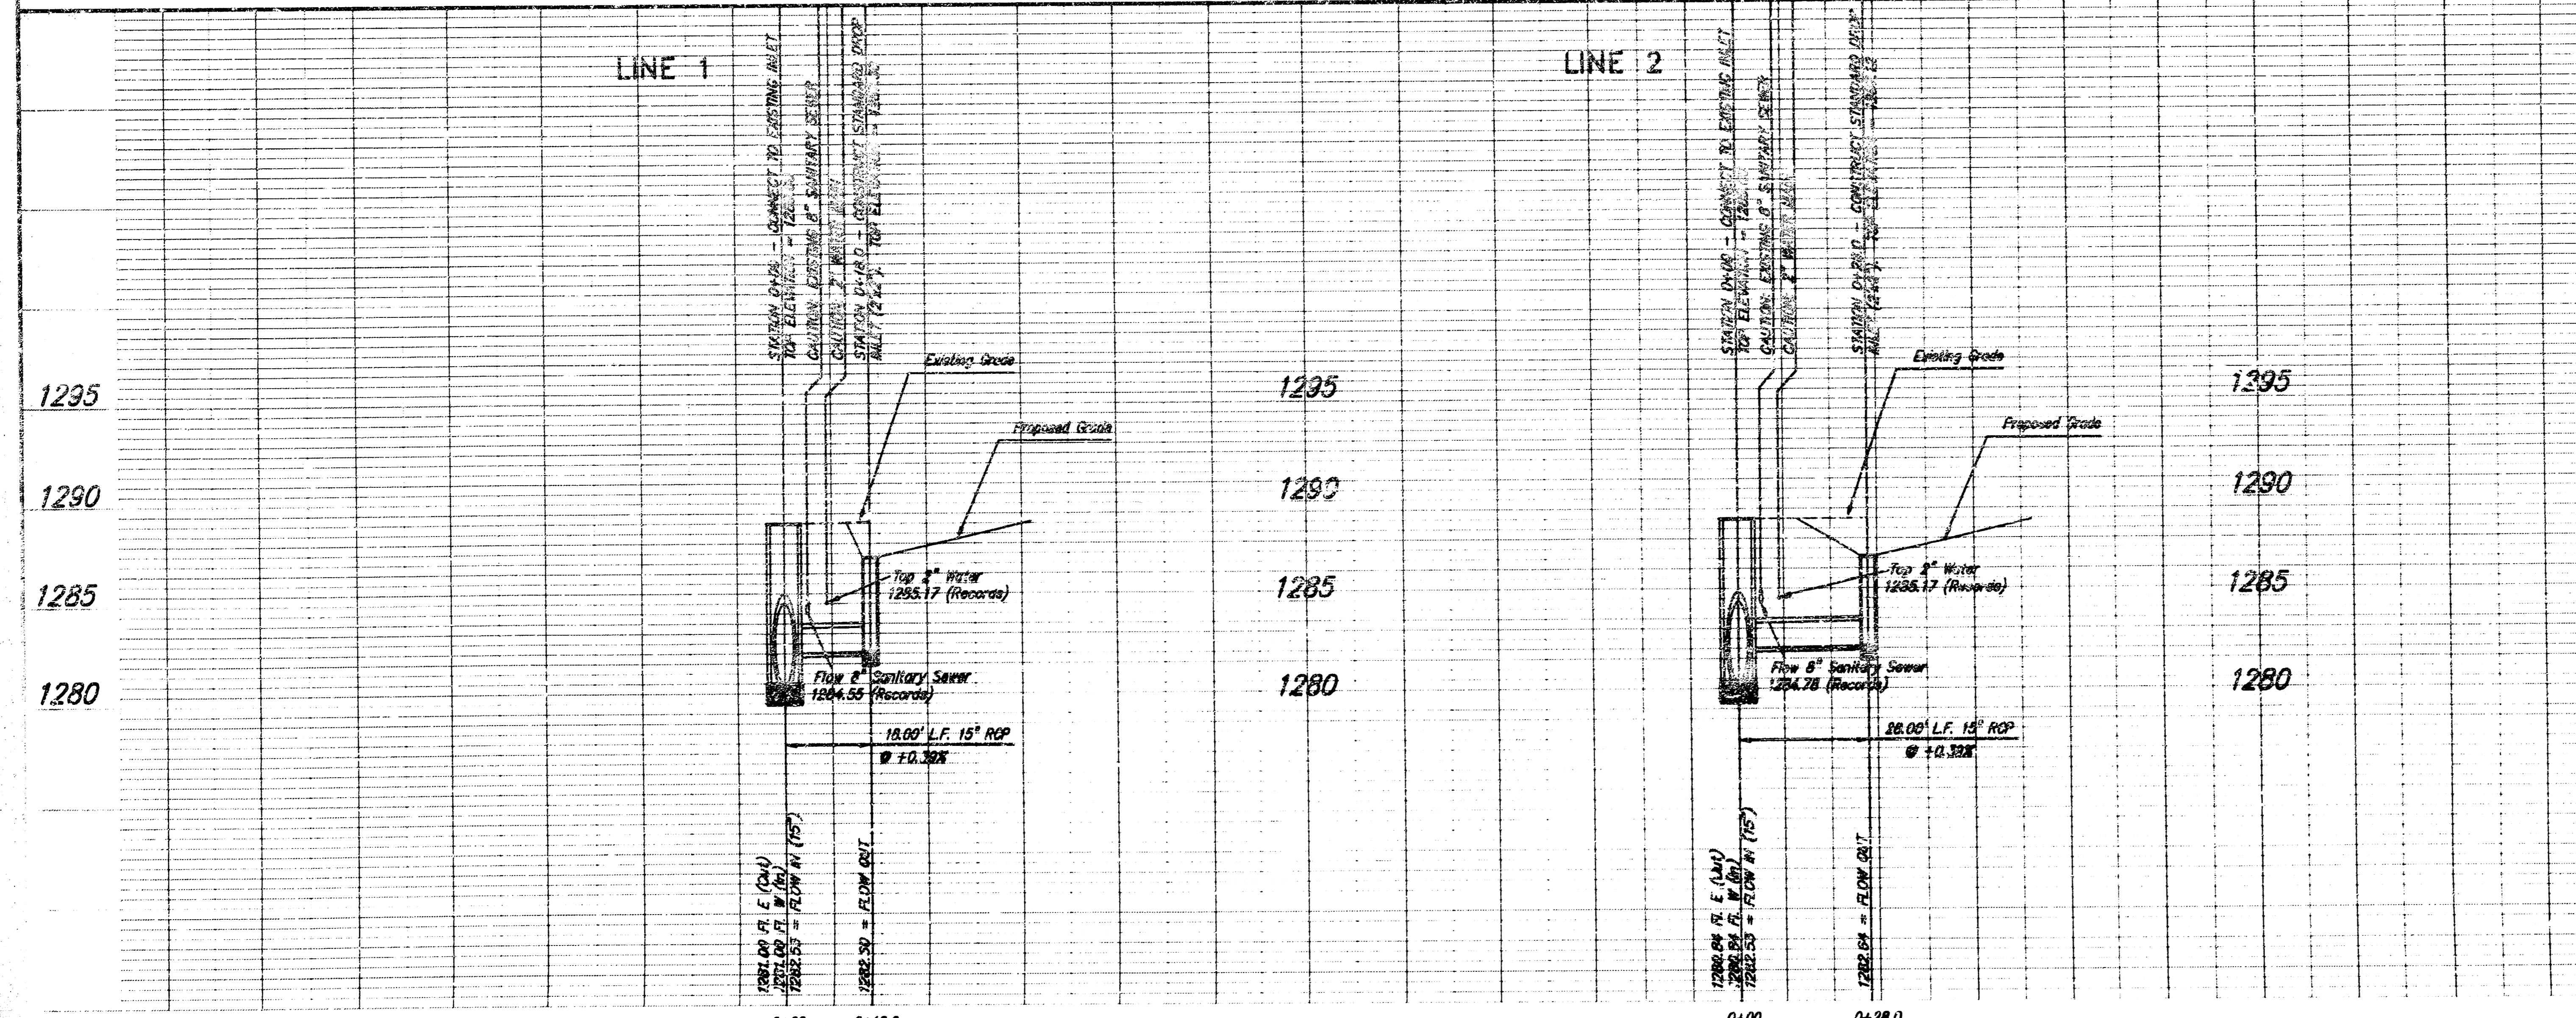

PRIVATE STORM WATER SEWER SERVING LOTS 18-30, MERTON PARK ADDITION CITY OF WICHITA, KANSAS

SRB 924 NORTH MAIN 313-264-8008
 WICHITA, KANSAS 67203 FAX 313-264-8021
 http://www.srb.com E-Mail: srb@srb.com

SAVOY, RUGGLES & BOHM, P. A.
 ENGINEERING & SURVEYING

PROJECT NUMBER
1177 PPS (607861)

DESIGN	DRAWN	CHECKED	DATE	REVISED
JDS	JDS	JDS	Nov. 13, 2001	