


THE RIP-RAFF ON THIS PROJECT SHALL BE TYPE 3. THE TYPE 3 RIP-RAFF SHALL BE 12" RIP-RAFF ON 4" SAND AND GRAVEL BEDDING. THE ROCK FOR RIP-RAFF AND GRAVEL PROTECTION SHALL BE HARD, DENSE, DURABLE AND SHALL BE REASONABLY WELL GRADED. THE SIZE RANGE OF ROCK NEEDS SHALL HAVE A MAXIMUM SIZE OF ONE CUBIC FOOT AND A MINIMUM SIZE OF 1 1/2 INCH. THE 6 INCH SAND AND GRAVEL BEDDING FOR RIP-RAFF SHALL BE A CONTINUOUS LAYER OF SAND AND GRAVEL OR SAND AND CRUSHED ROCK, REASONABLY WELL GRADED.



CITY OF WICHITA, KANSAS
R.W. LINN CITY ENGINEER
DATE _____ Sheet 1 of 2
PROJ. NO. 468-74-445-80582-000 000 002

FILMED FROM THE BEST
AVAILABLE COPY

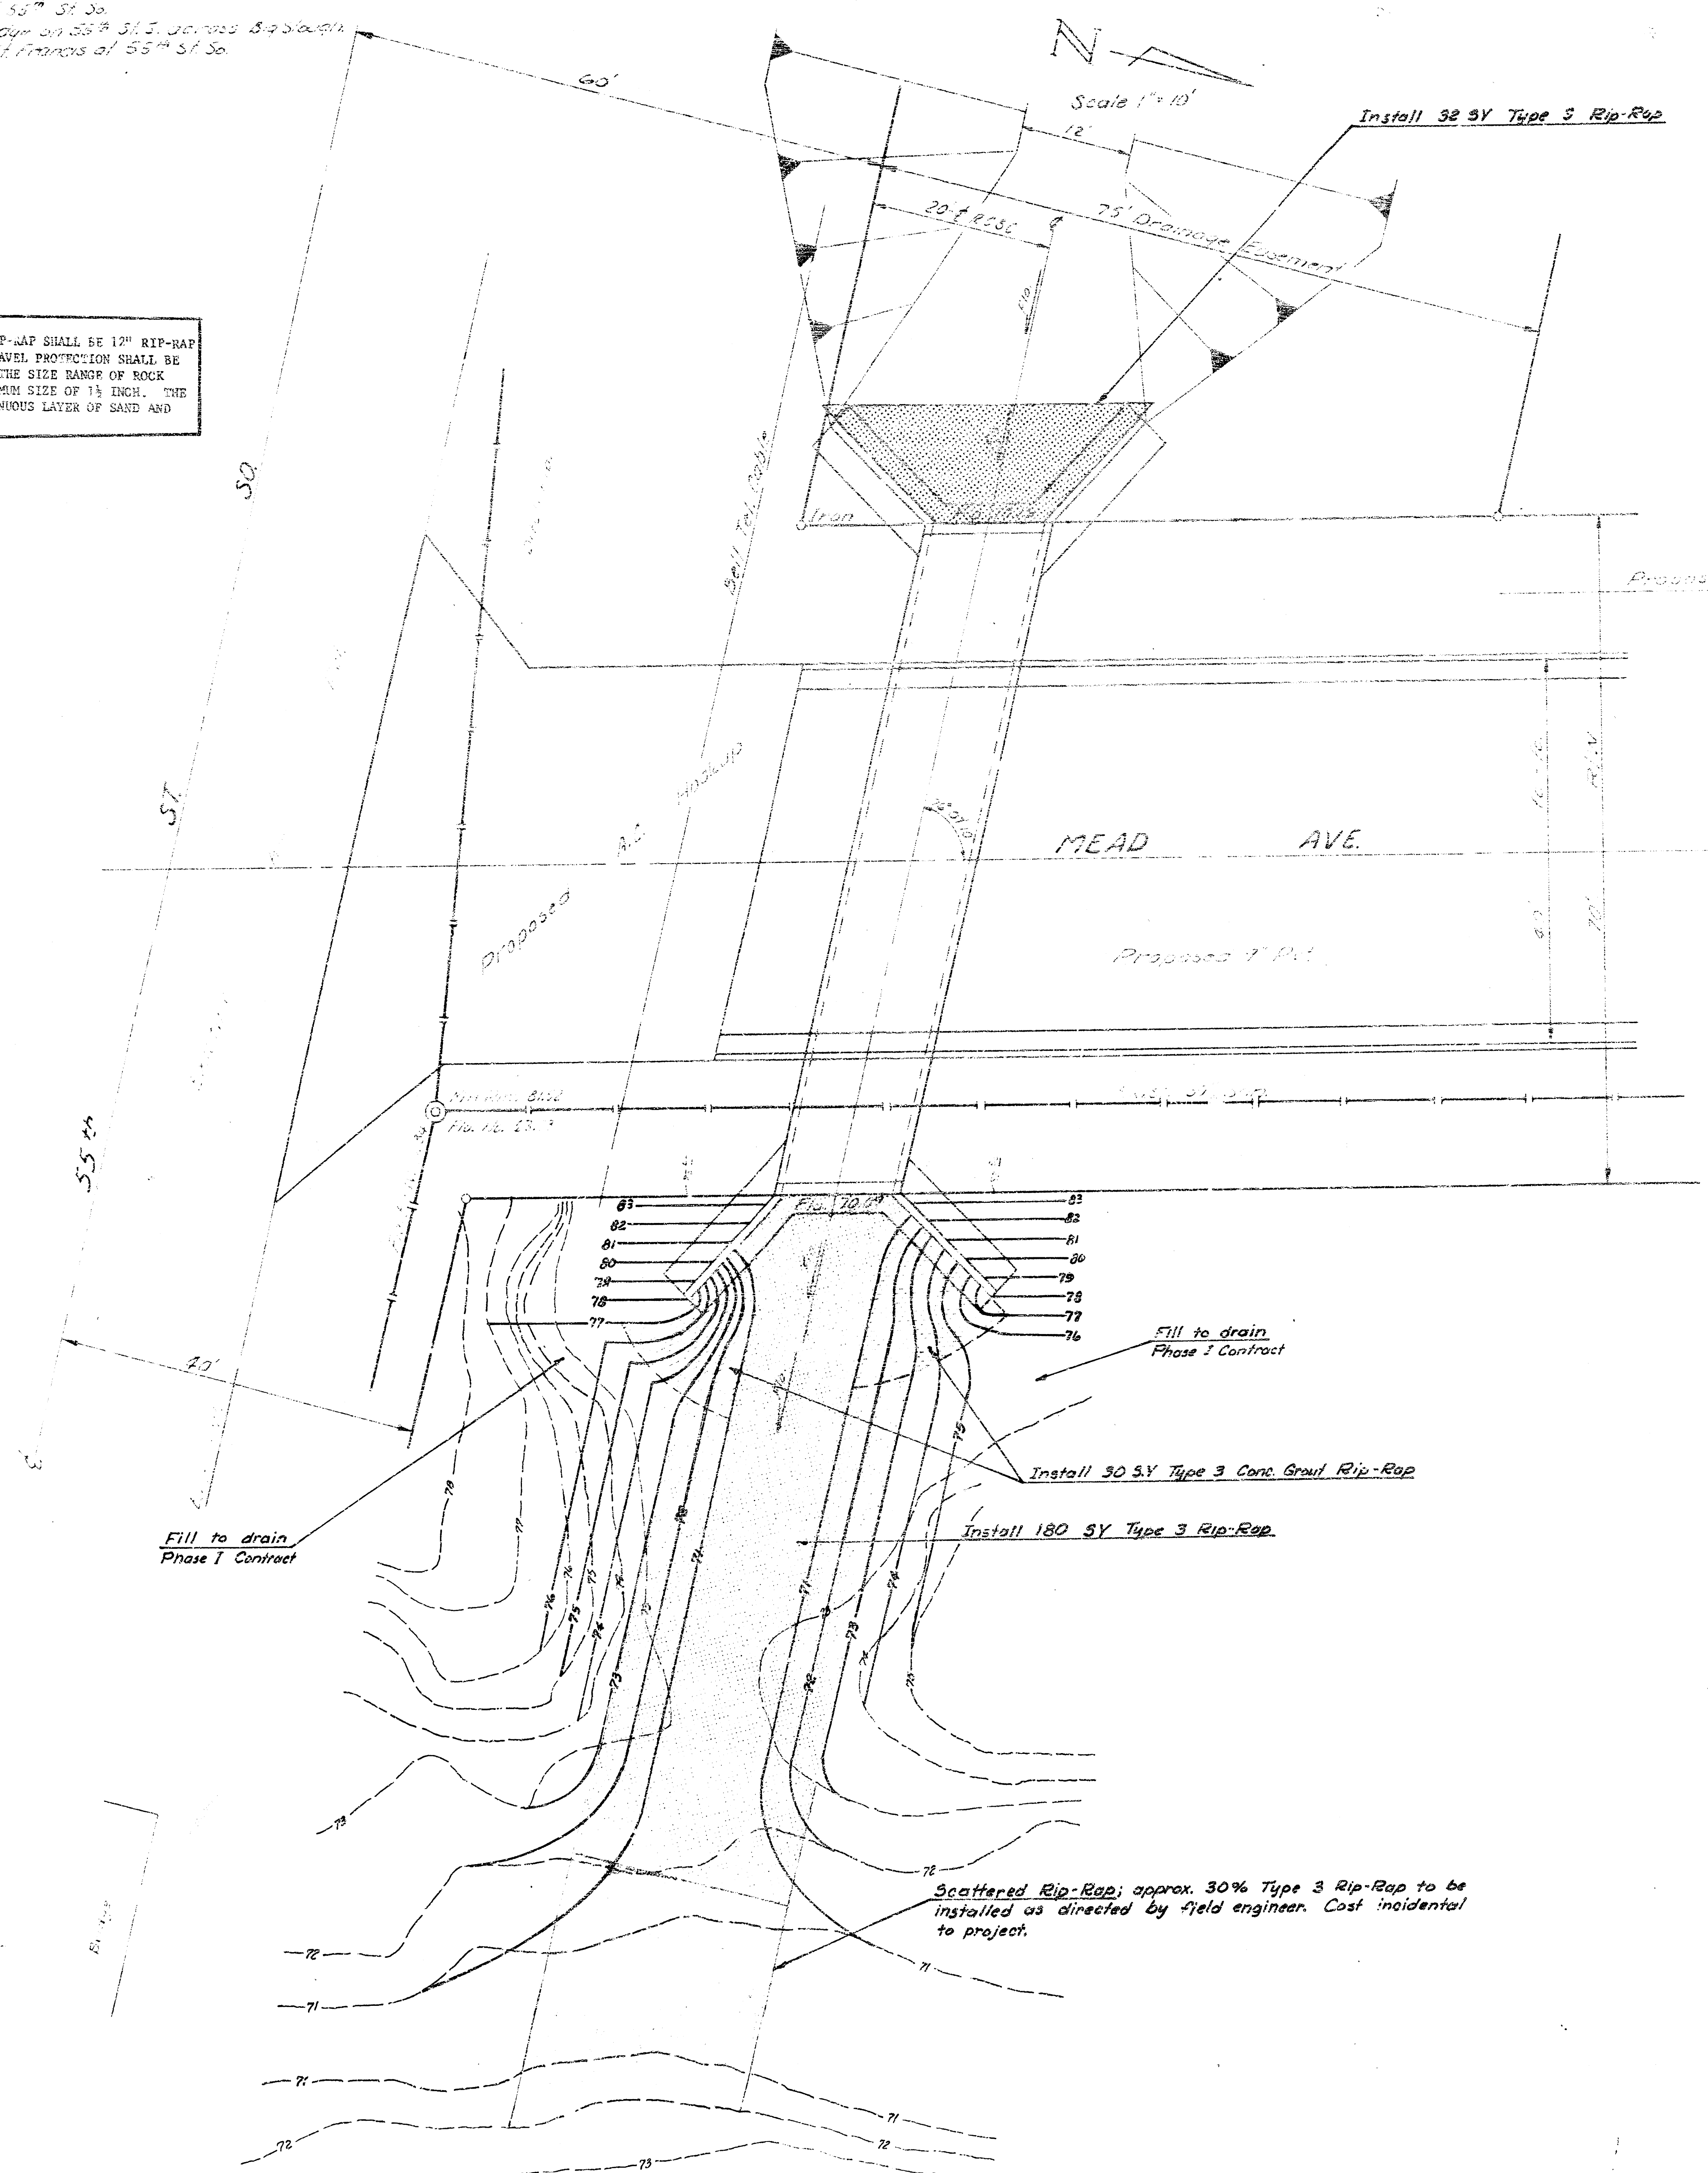