


LARKSPUR

W. L. EDGE MOOR-S. L. 21st
472-76-245-80378-000-000-001

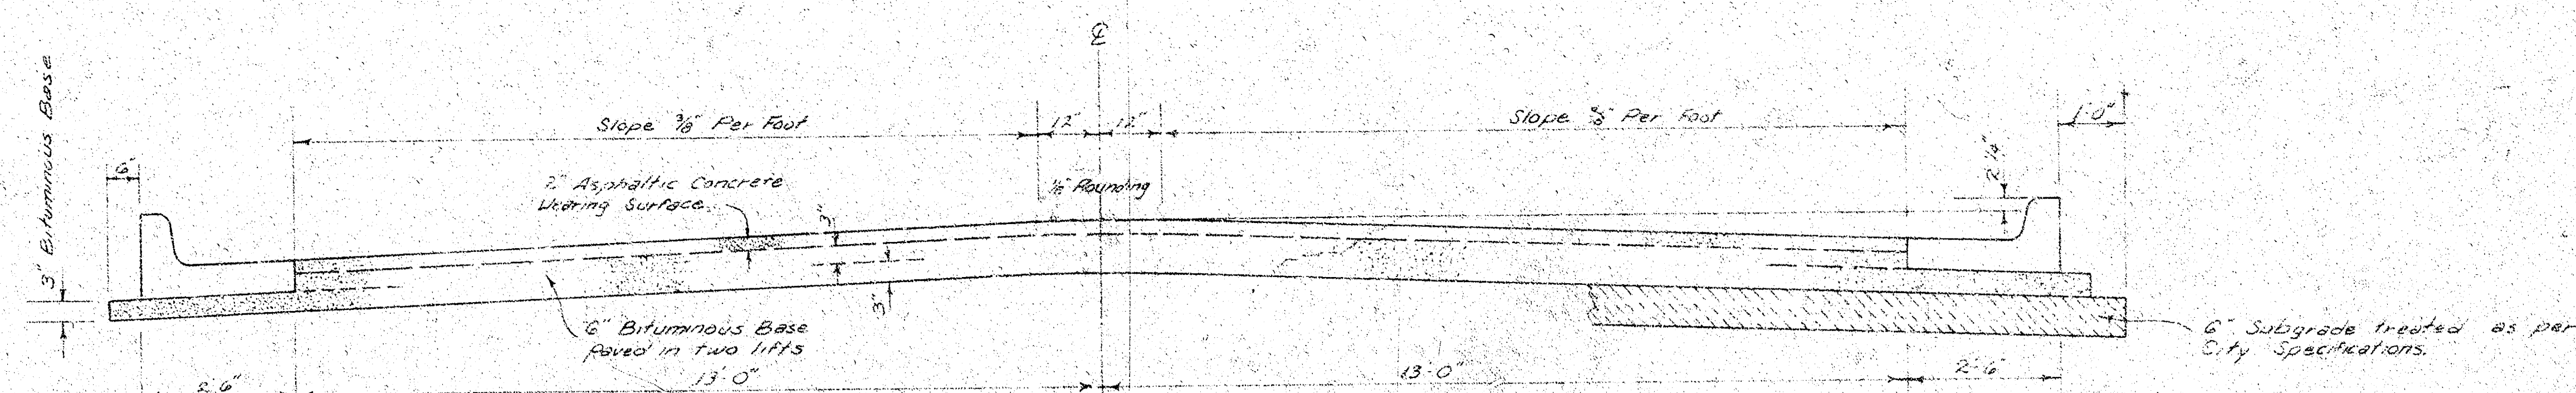


TYPICAL SECTION

3' ASPHALTIC CONCRETE PAVEMENT WITH BITUMINOUS BASE

A TACK COAT OF EMULSIFIED ASPHALT (SS-1H) SHALL BE APPLIED AT AN APPROXIMATE RATE OF 0.05 GALLONS PER SQ YD. BETWEEN LIFTS OF ASPHALTIC MATERIALS WHEN ORDERED BY THE ENGINEER. TACK COAT WILL NOT BE PAID FOR DIRECTLY AND SHALL BE CONSIDERED AS SUBSIDIARY TO PRICE BID FOR ASPHALTIC PAVEMENT.

BITUMINOUS BASE AND ASPHALTIC CONCRETE WEARING SURFACE SHALL BE PLACED WITH A LAYDOWN MACHINE HAVING AUTOMATIC ELECTRONIC CONTROLS FOR CROWN AND GRADE. CONSTRUCTION JOINTS IN EACH LIFT SHALL BE STAGGERED A MINIMUM DISTANCE OF 1' WITH JOINTS IN PRECEDING LIFTS AND SUCH THAT A JOINT WILL BE CONSTRUCTED ON THE PAVEMENT CENTERLINE IN THE TOP LIFT.


DETAIL OF TRANSVERSE CONSTRUCTION JOINTS

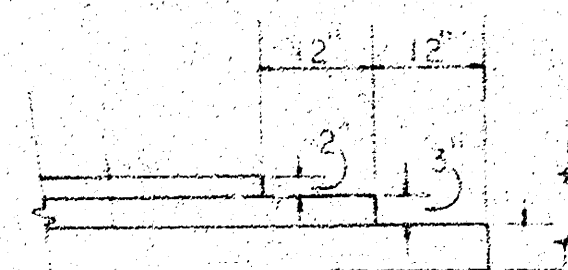


TRANSVERSE CONSTRUCTION JOINTS SHALL BE CONSTRUCTED IN FLEXIBLE BASE PAVEMENTS AT LOCATIONS WHERE PAVEMENT TEMPORARILY ENDS TO FACILITATE FUTURE PAVEMENT CONSTRUCTION AS SHOWN BY DETAIL. THE COST OF CONSTRUCTING THE TRANSVERSE CONSTRUCTION JOINTS SHALL NOT BE MEASURED OR PAID FOR DIRECTLY BUT SHALL BE INCLUDED IN THE BID PRICE FOR SQUARE YARDS OF ASPHALTIC CONCRETE PAVEMENT.

The A.C. pavement between the Comb. Curb & Gutter shall be paid as Sq. Yds. B. A.C. Pavement (6\"/>

COMBINED CURB & GUTTER

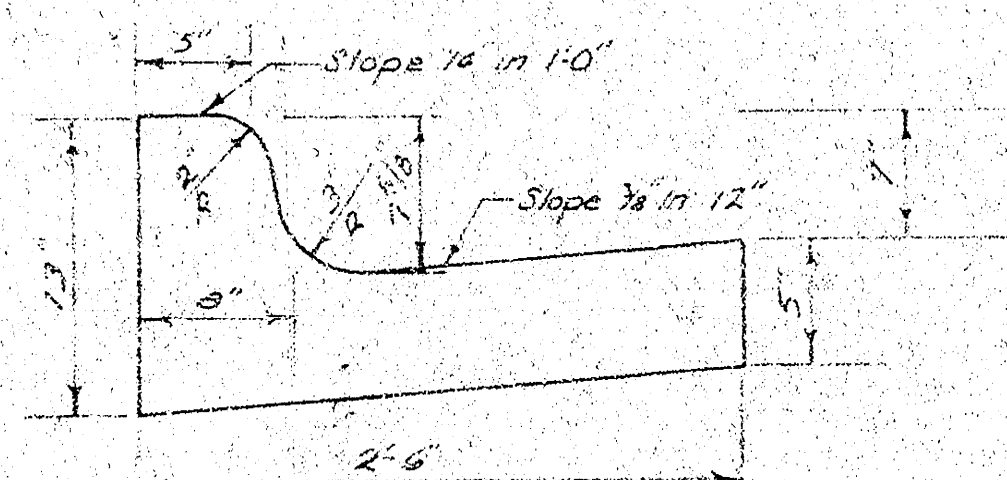

ROLL TYPE CURB & GUTTER

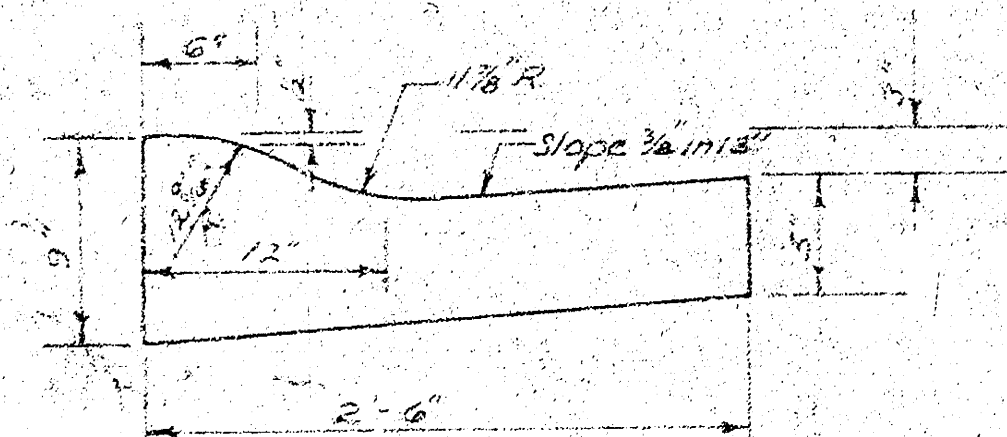

CITY OF WICHITA, KANSAS



DEPARTMENT OF PUBLIC WORKS — ENGINEERING

R. W. LINN CITY ENGINEER

DATE _____ PROJ. NO. 472-76-245-80378-000-000-001

FILMED FROM THE BEST
AVAILABLE COPY.....

B.M. 212.18 City Std. Ridgewood & 21st, 32' East & 44' South of G. Bath

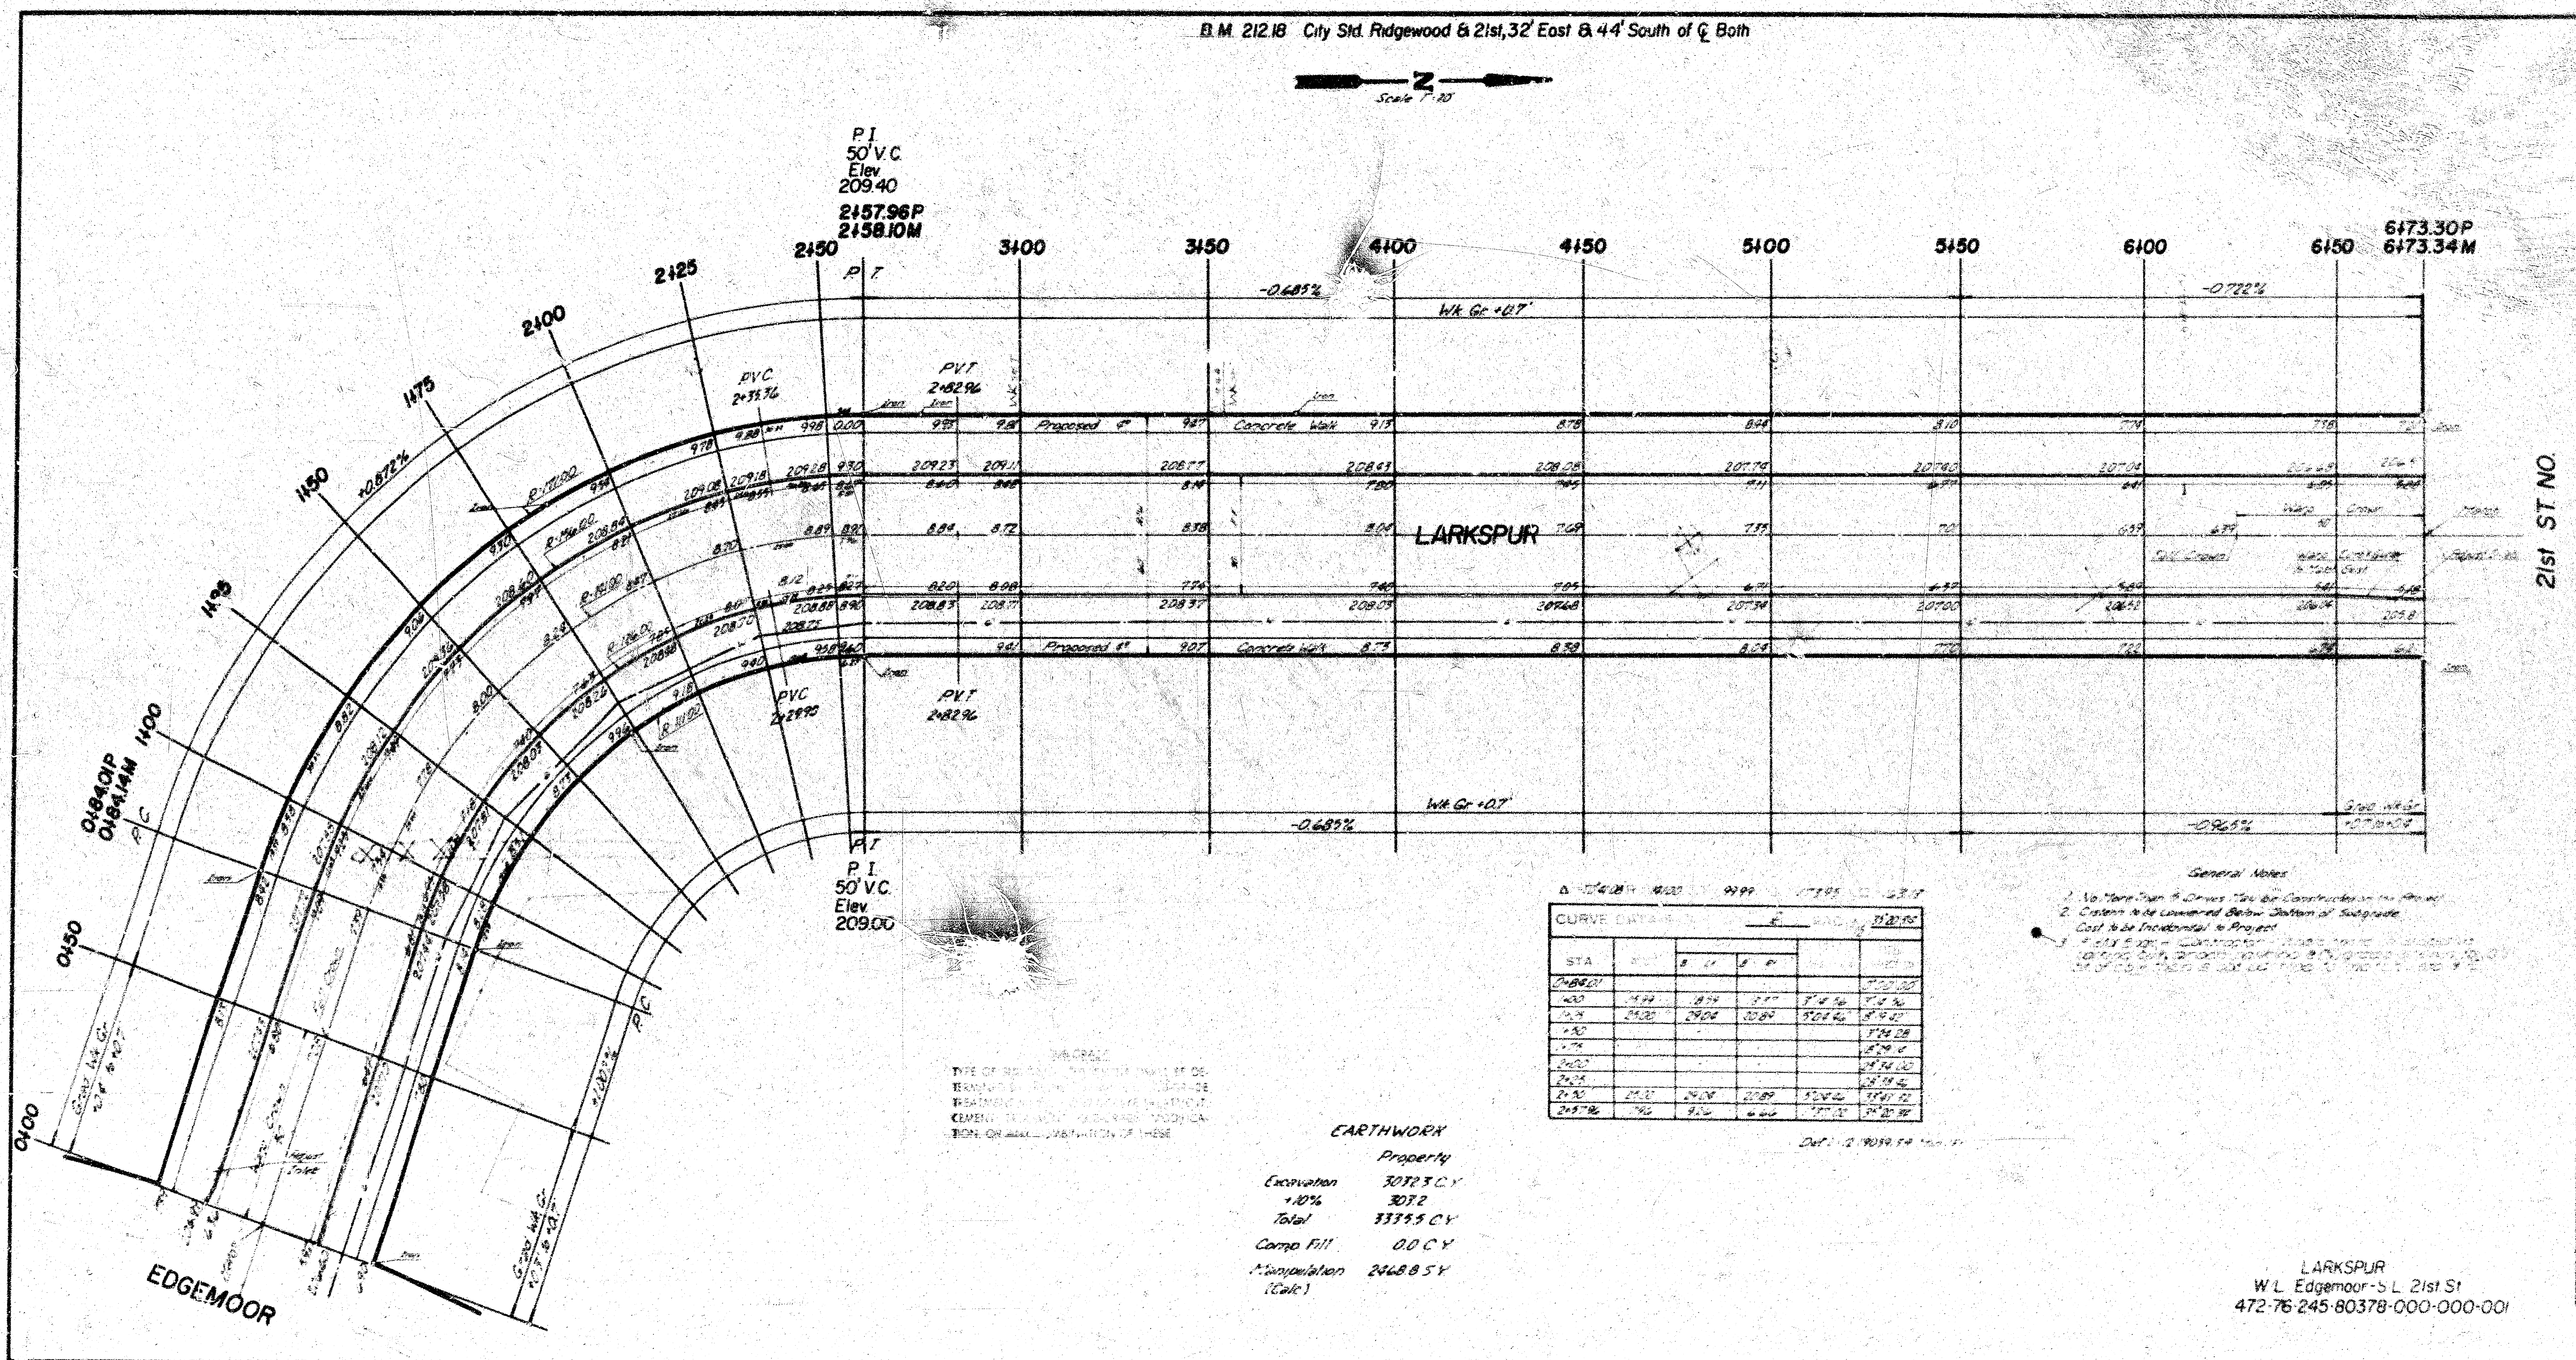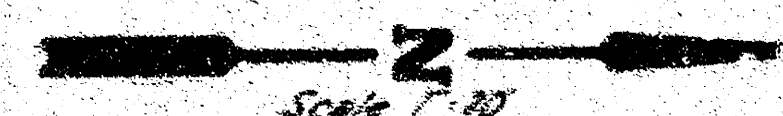

Curved Data Table

STA	1	2	3	4	5	6	7	8	9	10
0+00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
1+00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
2+00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
3+00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
4+00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
5+00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
6+00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
6+73.30P	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

EARTHWORK

Property	Excavation	Fill	Total
Excavation	3072.3 CY	3072	3335.5 CY
Fill	0.0 CY	0.0 CY	0.0 CY
Manipulation (Scale)	2468.5 Y		

LARKSPUR
W.L. Edgemoor-S.L. 21st St
472-76 245-80378-000-000-001