Base Line is ℄ Pavement

21.93889 min./ft.

				6° offset Rt. (W) Curb Pt 25.35' L = 88.80'		8° offset Rt. (W) Curb R = 1013.5' L = 162.59'	
Station	Point	Alignment	Deflection	Chord	Arc	Chord	Arc
6+62.59	P.T.	Δ = 91°55'	45°57'30"	8.88'	8.89'	14.27'	14.29'
6+50		R = 78.35'	91°21'17"	12.58'	12.66'	32.18'	32.34'
6+25		L = 125.69'	32°12'45"	12.71'	12.74'	23.27'	23.32'
6+06.97			25°37'15"				

NOTE:

Contractor to grade parkings and Compact Fill for proposed sidewalk. Sidewalk to be Constructed by others.

B.M. 1587.6 'R' in R.C.Co. top curb N. end of W. curb on Maus 30' S. of ℄ 12th St.

Scale: 1"=20'

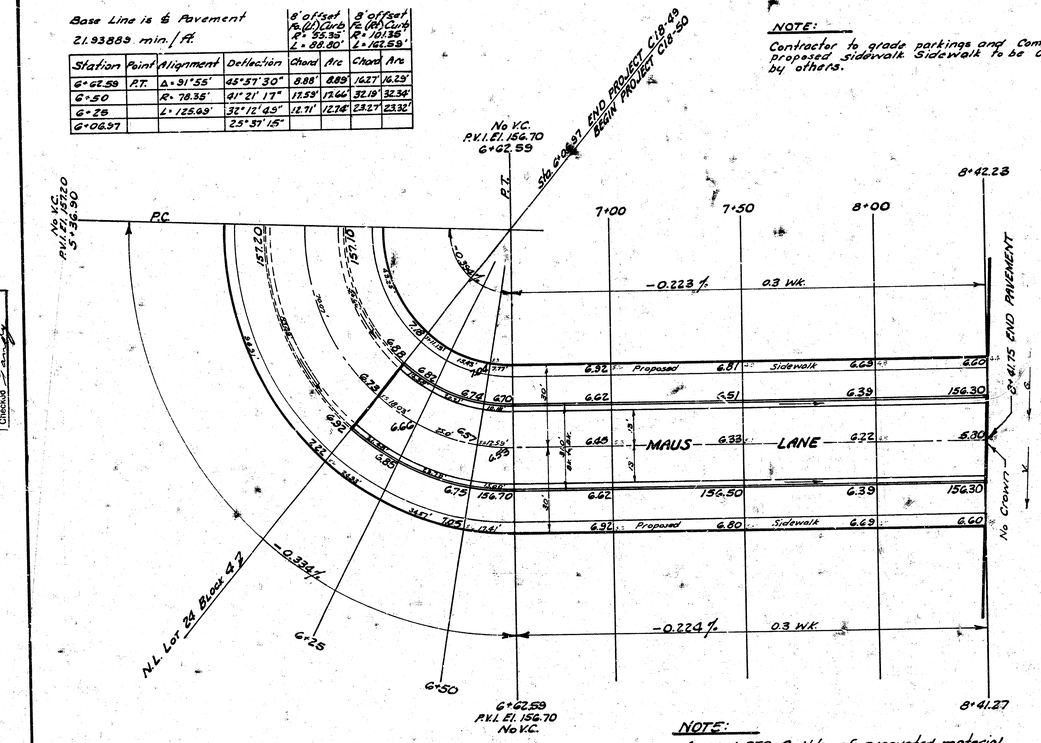

Survey DCO
Plan J.C.M.
Ex.
Checked [illegible]

Blue 7

COMPACTED FILL		
	294	Cu.Yds.
+10 %	29	- -
Total	323	Cu.Yds.

BORROW EXC.	
350	Cu.Yds.
35	- -
385	Cu.Yds.

NOTE:

Approx. 350 Cu.Yds. of excavated material from 12th St. Proj. DAKS 5G8048 is to be used on this project.

JOHN L. ADAM LICENSED 821 KANSAS SEDGWICK COUNTY

MAUS LANE

E.L. CHIPPER LANE to N.L. LOT 24

BLK. 4 WESTLINK VILLAGE 8TH ADD'N

26-2-30 A.C.

R.W. LINN CITY ENGINEER

CITY OF WICHITA KANSAS

Date: July 1971

Project No. DAKS 5G8050

(1/2)

L=235