


BM 10706 80" spike NE side HLP SW cor St Francis & Morris.

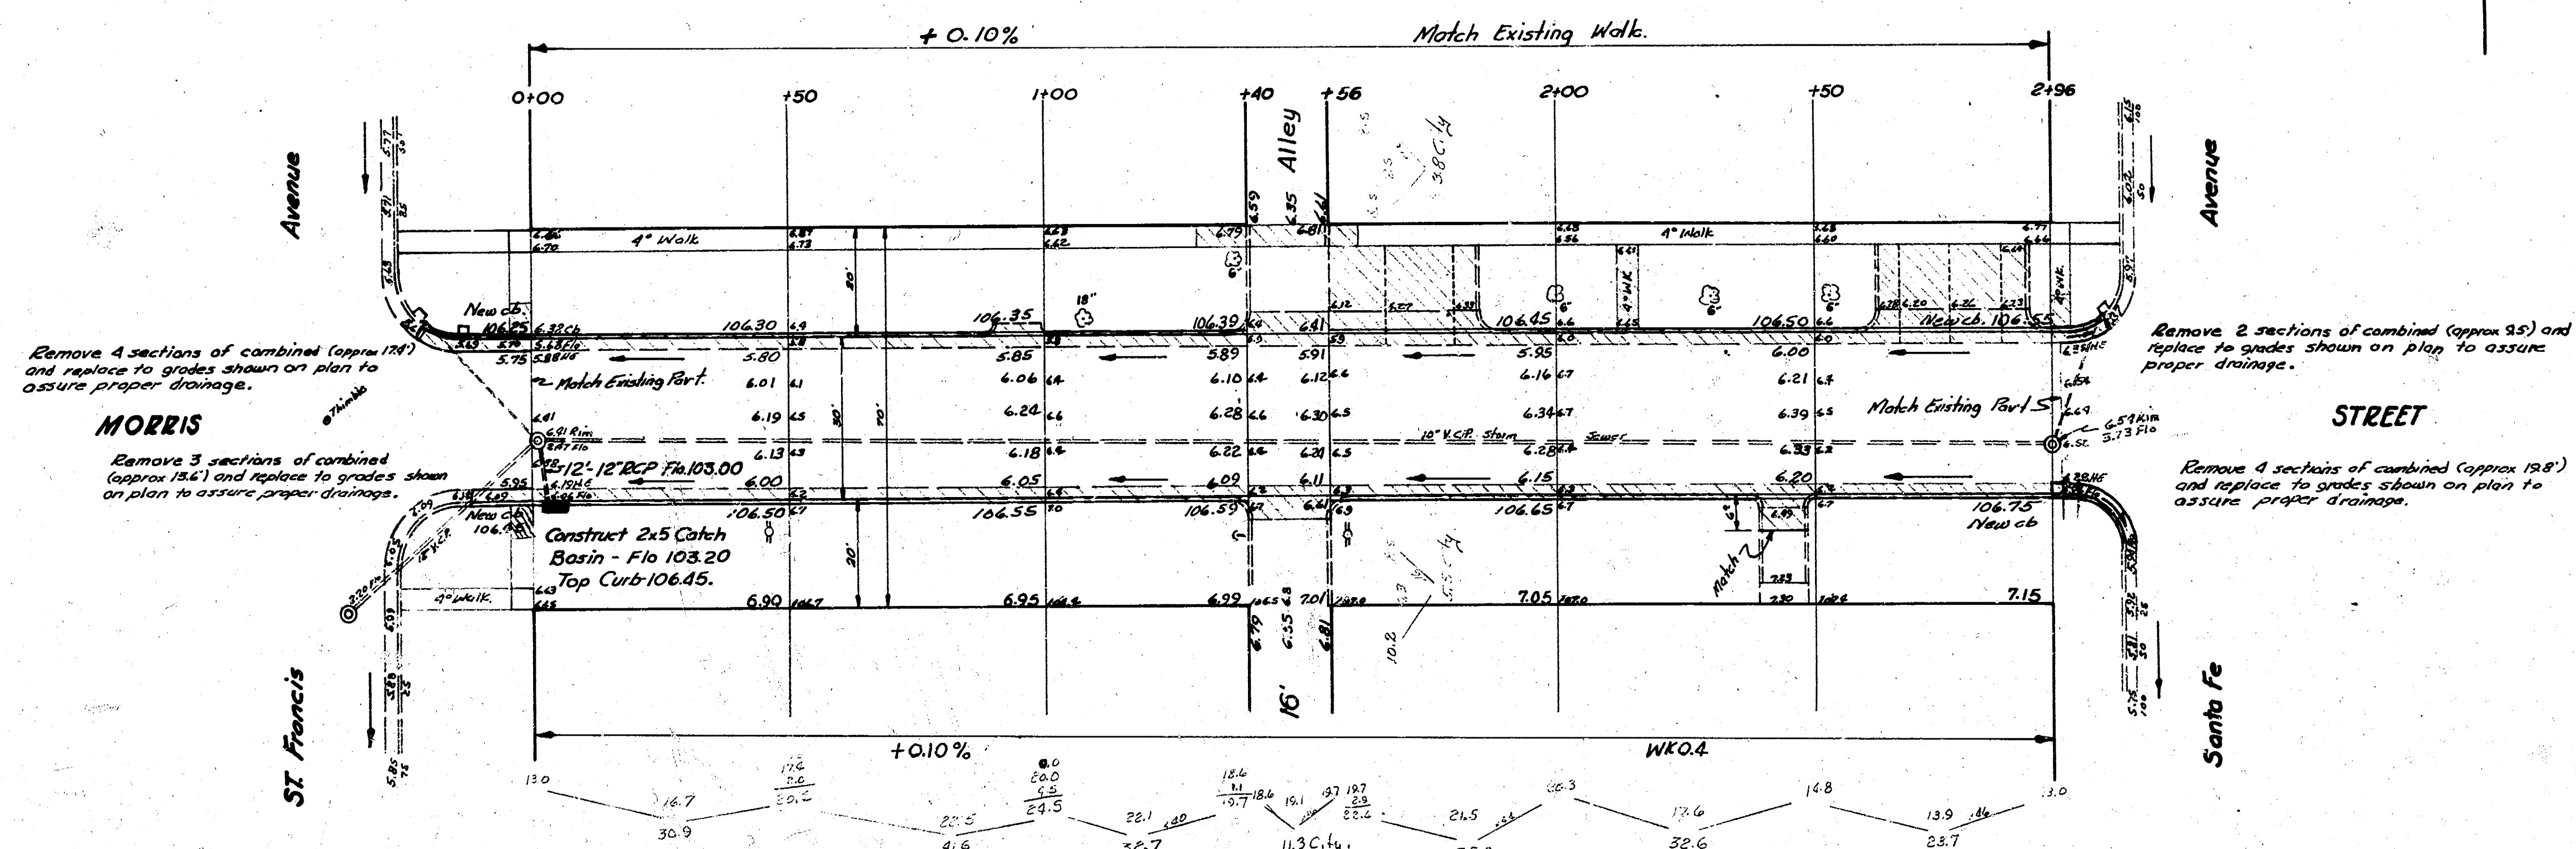

Remove 4 sections of combined (approx 174') and replace to grades shown on plan to assure proper drainage.

MORRIS

Remove 3 sections of combined (approx 154') and replace to grades shown on plan to assure proper drainage.

Construct 2x5 Catch Basin - Flt 103.20 Top Curb 106.45.

Remove 2 sections of combined (approx 95') and replace to grades shown on plan to assure proper drainage.

STREET

Remove 4 sections of combined (approx 198') and replace to grades shown on plan to assure proper drainage.

Excavation Totals -
 Paper 14 C. 14
 156.5
 19.7
 216.2 Cu yds.

MORRIS STREET
 EL ST Francis to WL Santa Fe
 30' Conc & Ch.
 CITY OF WICHITA, KANSAS
 R.E. SMITH CITY ENGINEER
 OCT. 1957 PROJ. NO. C 17-62



Survey Young
 Plan
 Exc
 Grading
 CHECKED 37