


SPRUCE

N·L·WASSALL TO N·L·GLEN OAKS

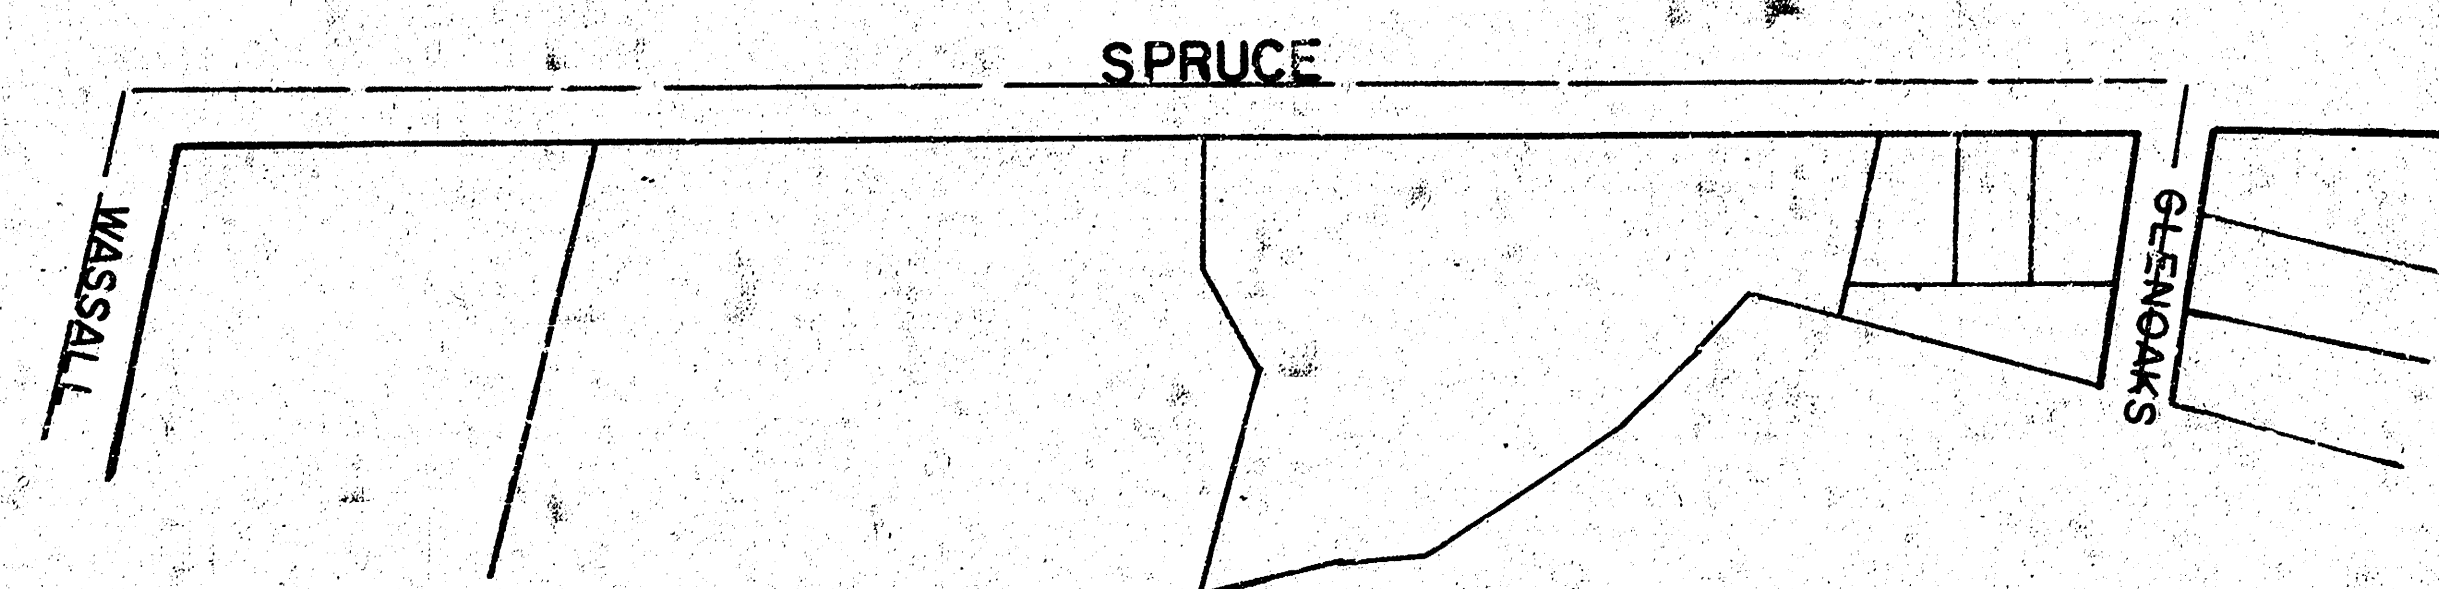


City of Wichita, KS

R·W·Bruggeman Director Of Engineering / City Engineer

Proj·NO· 472-76-245-81027-000-000-001



1/4

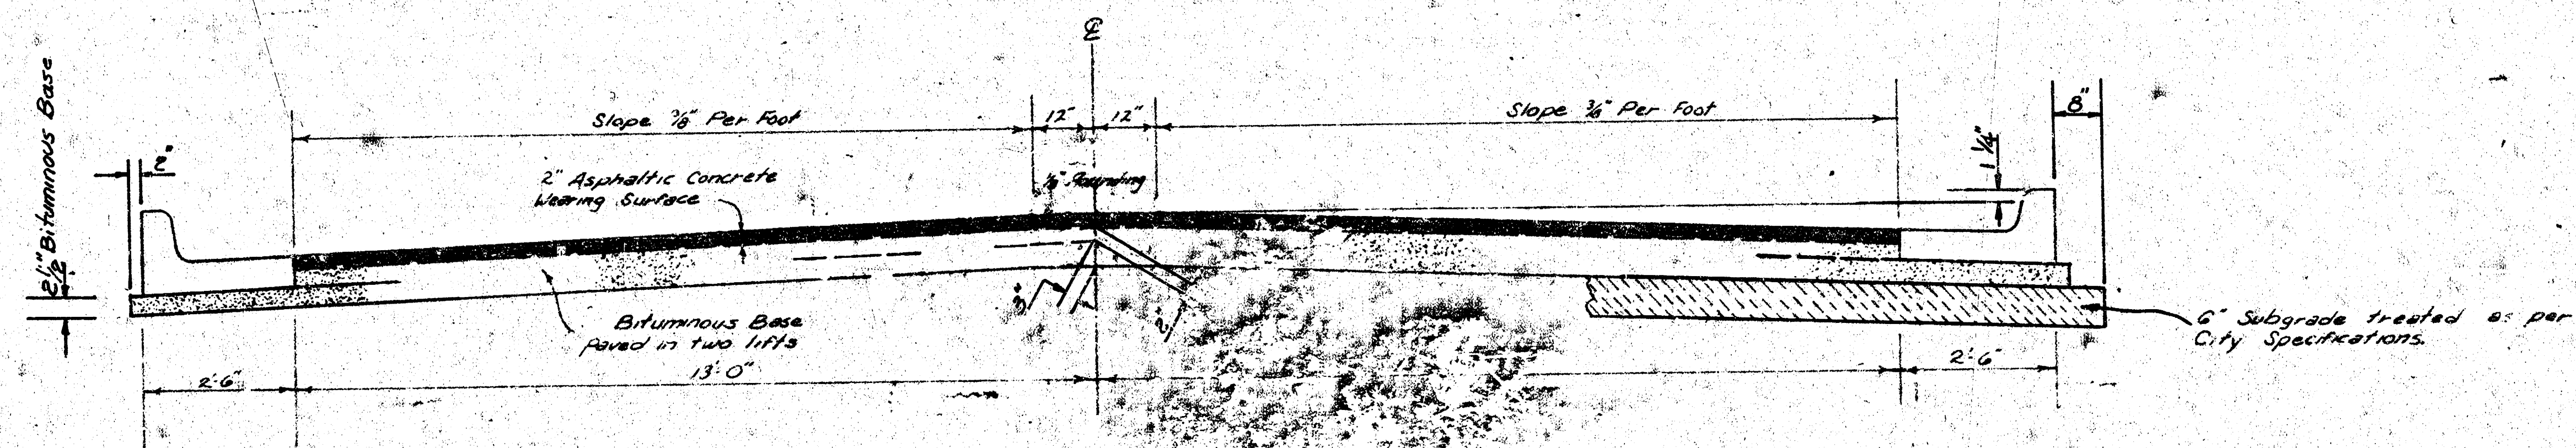


TYPICAL SECTION

31' ASPHALTIC CONCRETE PAVEMENT WITH BITUMINOUS BASE

A TACK COAT OF EMULSIFIED ASPHALT (SS-1H) SHALL BE APPLIED AT AN APPROXIMATE RATE OF 0.05 GALLONS PER SQ. YD. BETWEEN LIFTS OF ASPHALTIC MATERIALS WHEN ORDERED BY THE ENGINEER. TACK COAT WILL NOT BE PAID FOR DIRECTLY AND SHALL BE CONSIDERED AS SUBSIDIARY TO PRICE BID FOR ASPHALTIC PAVEMENT.

BITUMINOUS BASE AND ASPHALTIC CONCRETE WEARING SURFACE SHALL BE PLACED WITH A LAYDOWN MACHINE HAVING AUTOMATIC CONTROLS FOR CROWN AND GRADE. CONSTRUCTION JOINTS IN EACH LIFT SHALL BE STAGGERED A MINIMUM DISTANCE OF 1' WITH JOINTS IN PRECEDING LIFTS AND SUCH THAT A JOINT WILL BE CONSTRUCTED ON THE PAVEMENT CENTERLINE IN THE TOP LIFT.

DETAIL OF TRANSVERSE CONSTRUCTION JOINTS

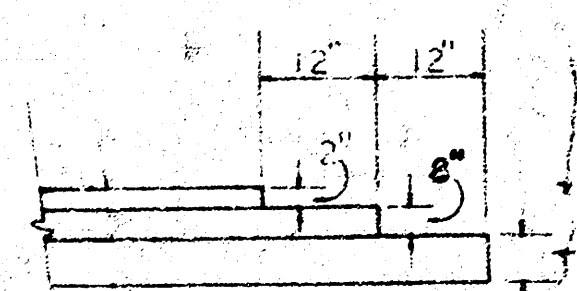


TRANSVERSE CONSTRUCTION JOINTS SHALL BE CONSTRUCTED IN FLEXIBLE BASE PAVEMENTS AT LOCATIONS WHERE PAVEMENT TEMPORARILY ENDS TO FACILITATE FUTURE PAVEMENT CONSTRUCTION AS SHOWN BY DETAIL. THE COST OF CONSTRUCTING THE TRANSVERSE CONSTRUCTION JOINTS SHALL NOT BE MEASURED OR PAID FOR DIRECTLY BUT SHALL BE INCLUDED IN THE BID PRICE FOR SQUARE YARDS OF ASPHALTIC CONCRETE PAVEMENT.


The A.C. pavement between the Comb. Curb & Gutter shall be paid as 5¢ Yds. 1" A.C. Pavement (5" Bituminous Base). The Bituminous Base under the Comb. Curb & Gutter shall be paid as 5¢ Yds. 2" Bituminous Base.

CITY OF WICHITA, KANSAS



COMBINED CURB & GUTTER

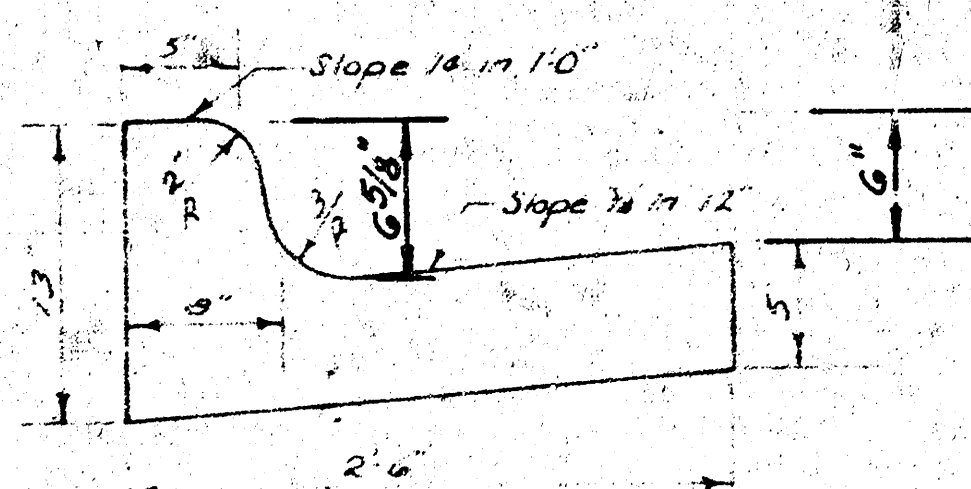

ROLL TYPE CURB & GUTTER

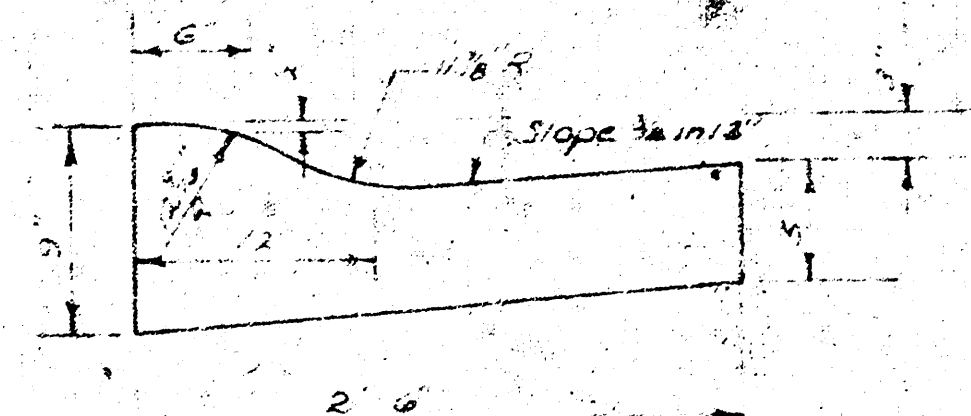

Baseline Is Q SPRUCE.

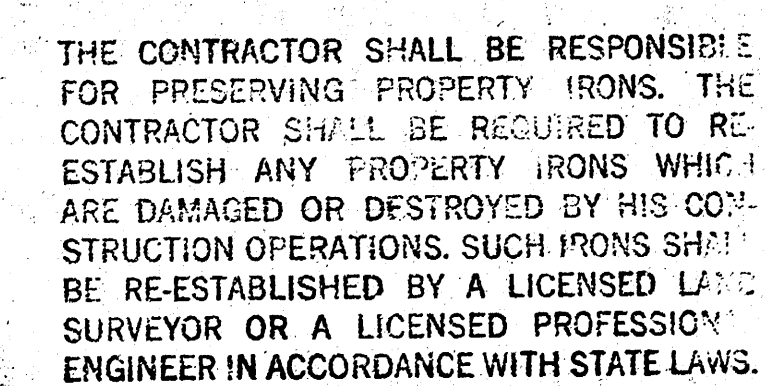

P. 1.
Elev. = 92.35
NO V.C.

SUB-GRADE
TYPE OF SUB-GRADE TREATMENT SHALL BE DETERMINED BY THE FIELD ENGINEER. SUB-GRADE TREATMENT MAY CONSIST OF LIME TREATMENT, CEMENT TREATMENT, SUB-GRADE MODIFICATION, OR ANY COMBINATION OF THESE.

CAUTION
UNDERGROUND
UTILITIES

Please check with K G & L or
Southwestern Bell
Telephone Co. for Location

SPRUCE ST.


Notes:

1. Contractor to Contact Property Owner Before Removal & Replacement Driveways Behind Property Line
2. Walk, Drive & Pavement Removal.
3. No More than (1-10, 1-12, 1-17 & 4-20) Driveway Approach Or the Equivalent to Be Constructed.





	PROP.	CITY
Total EXC.	1921.7 c-y	1909.1 c-y
+10%	192.2	190.9
TOTAL	2113.9 c-y	2100.0 c-y
Total Min.	3255.0 s-y	2592.9 s-y

Survey King
Plan *add 2 sheets*
Exc .
Checked


$\frac{3}{6}$

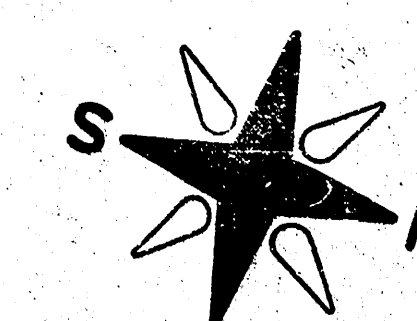


Scale 1" = 20'

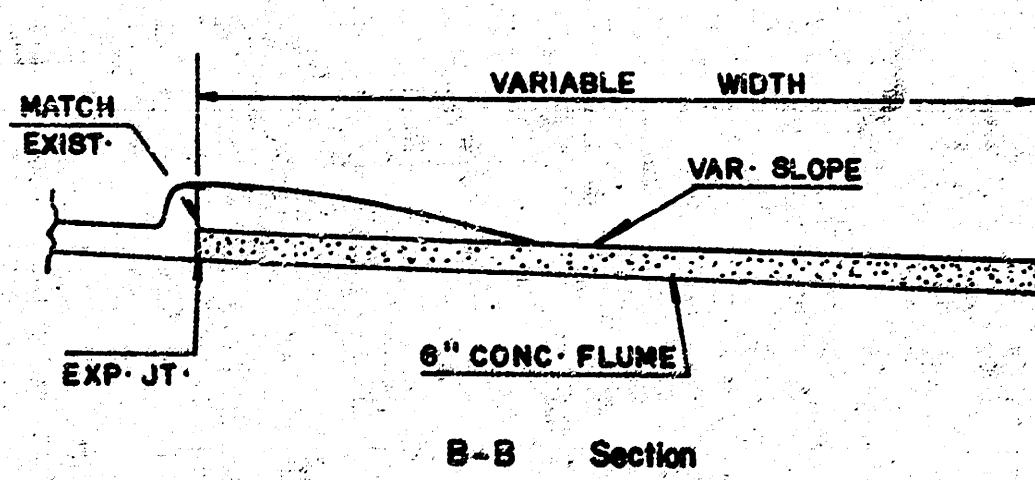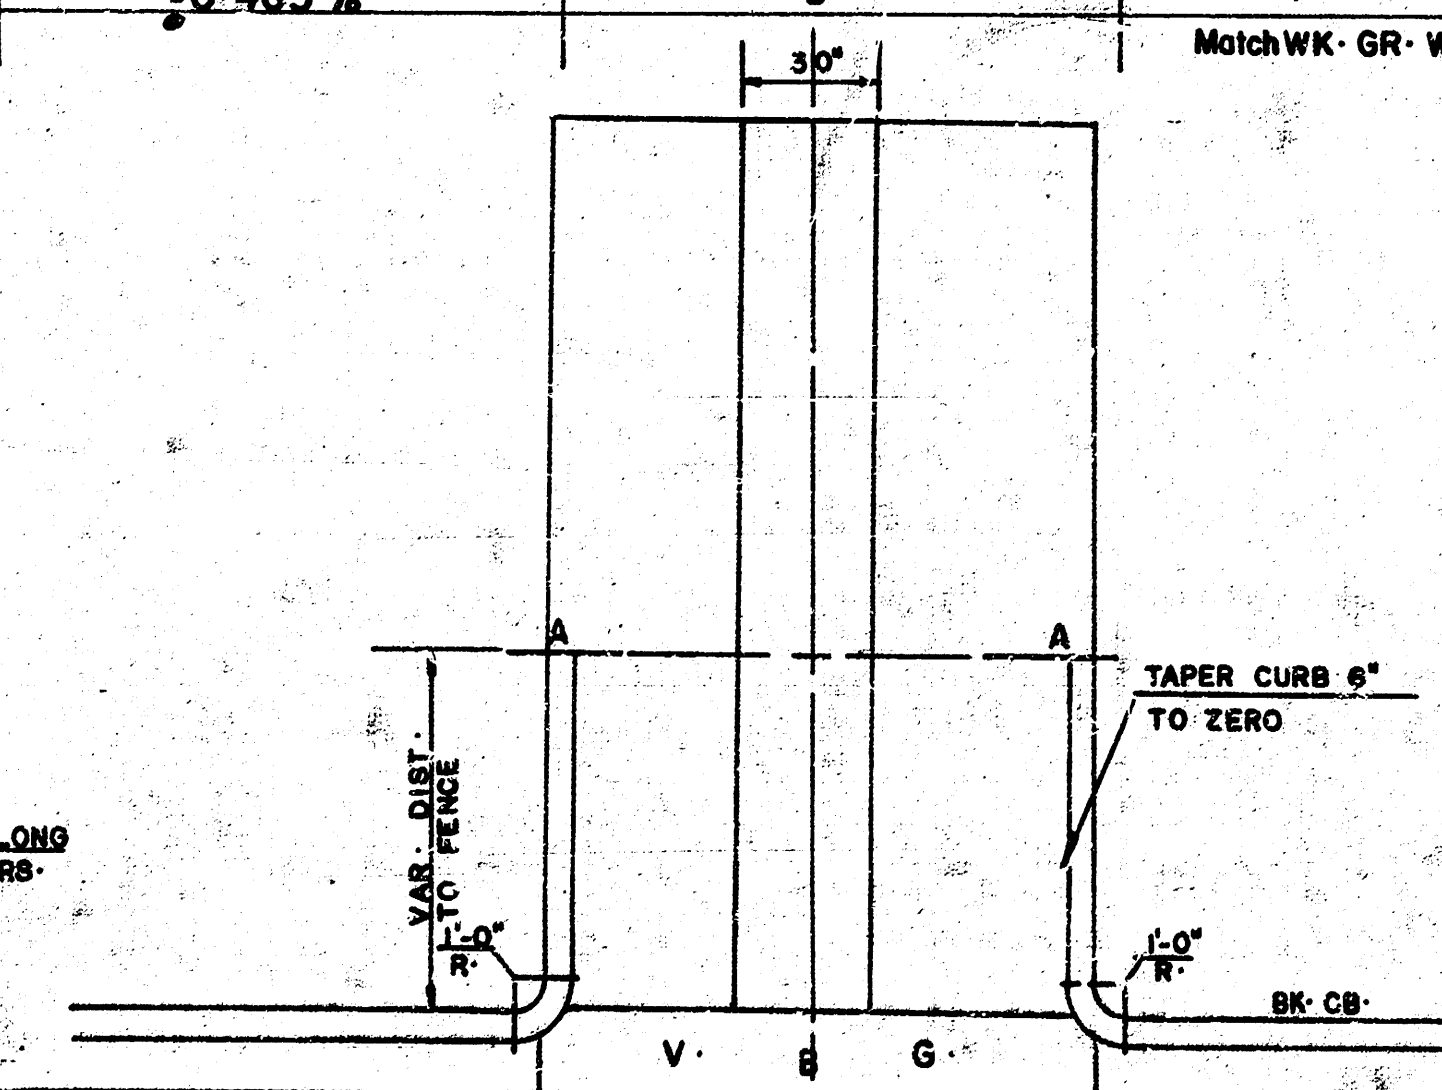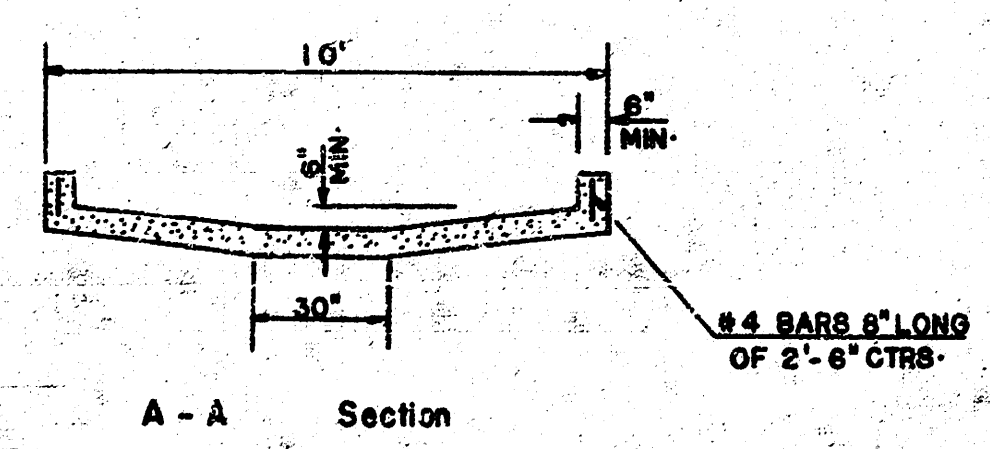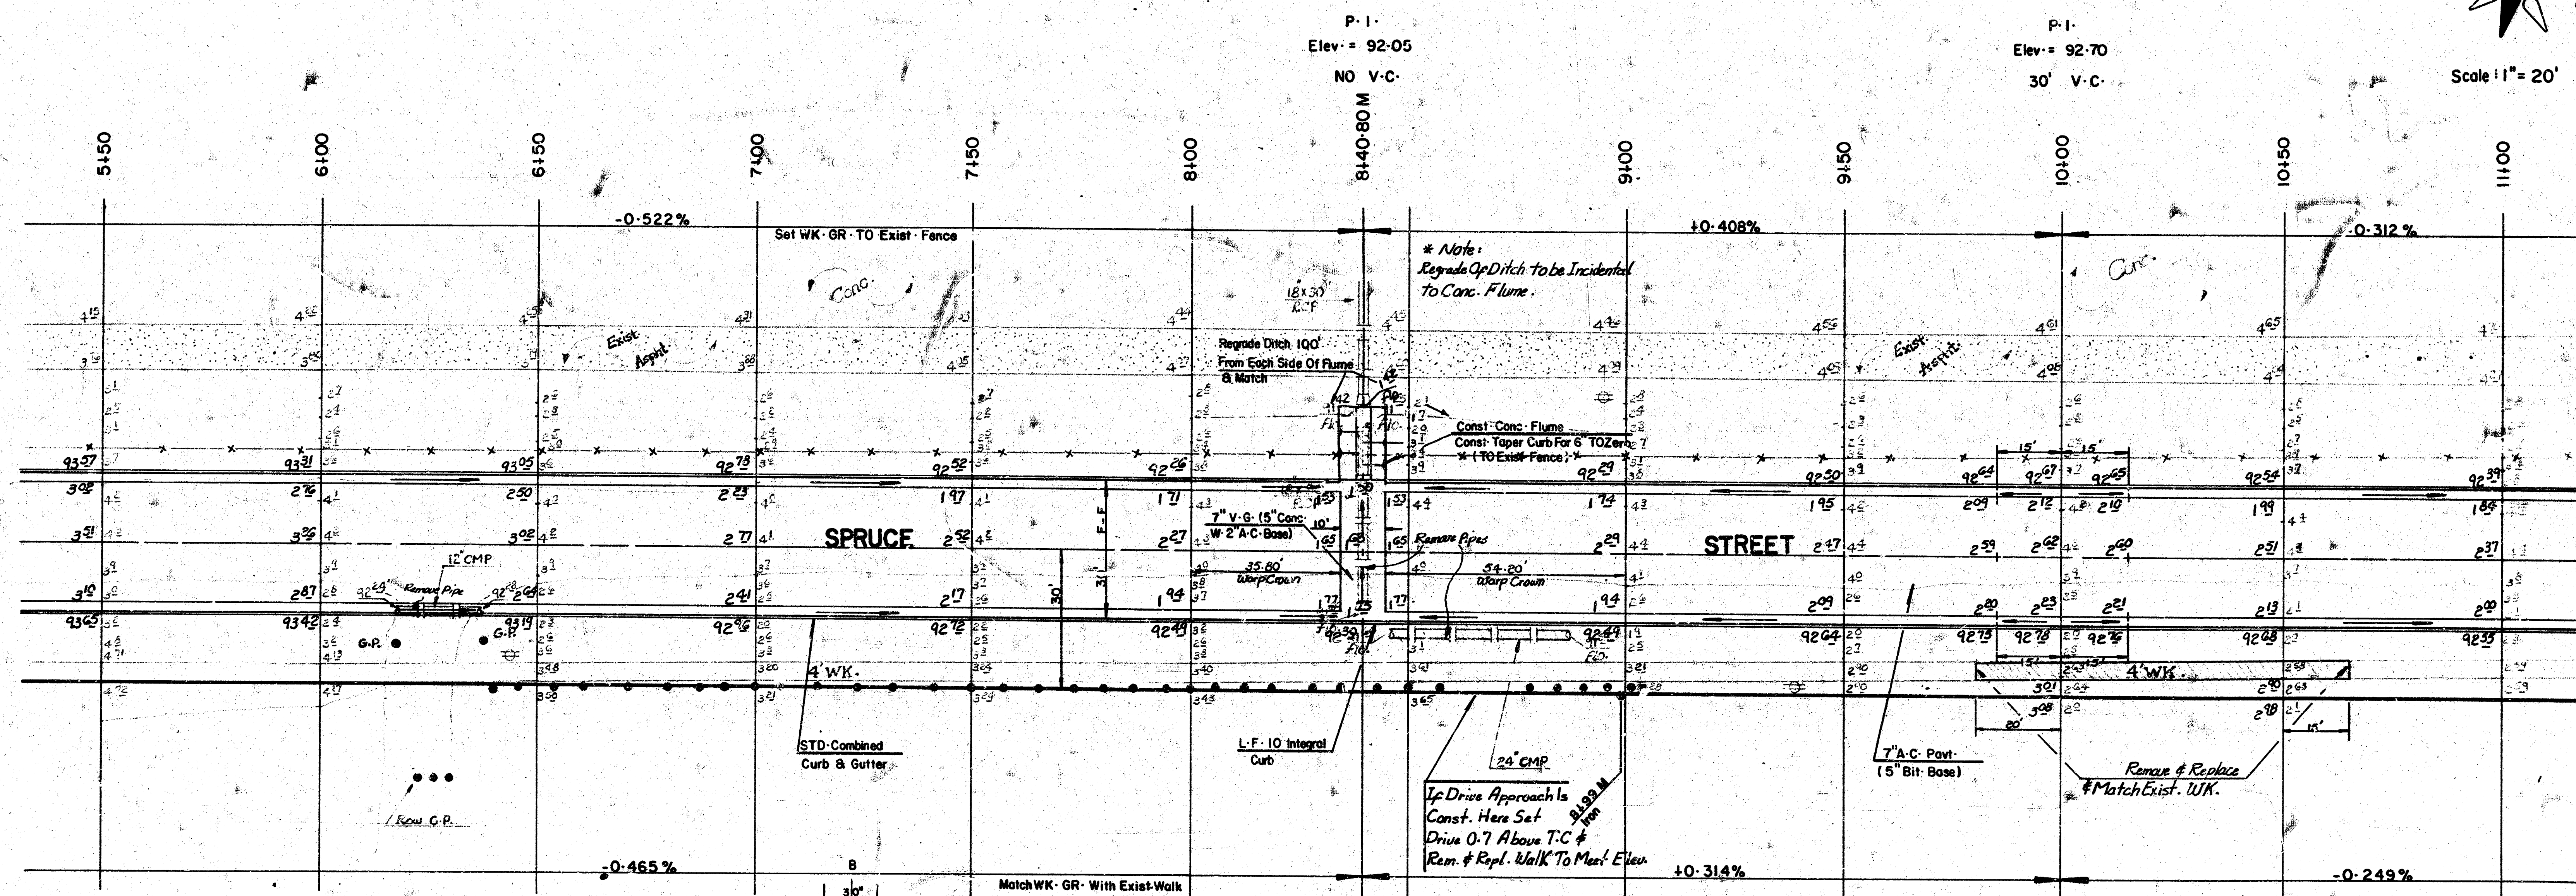

SPRUCE ST.

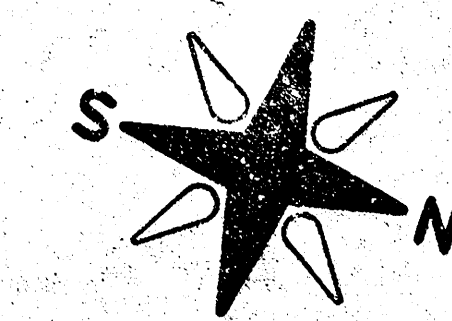

Scale: 1" = 20'

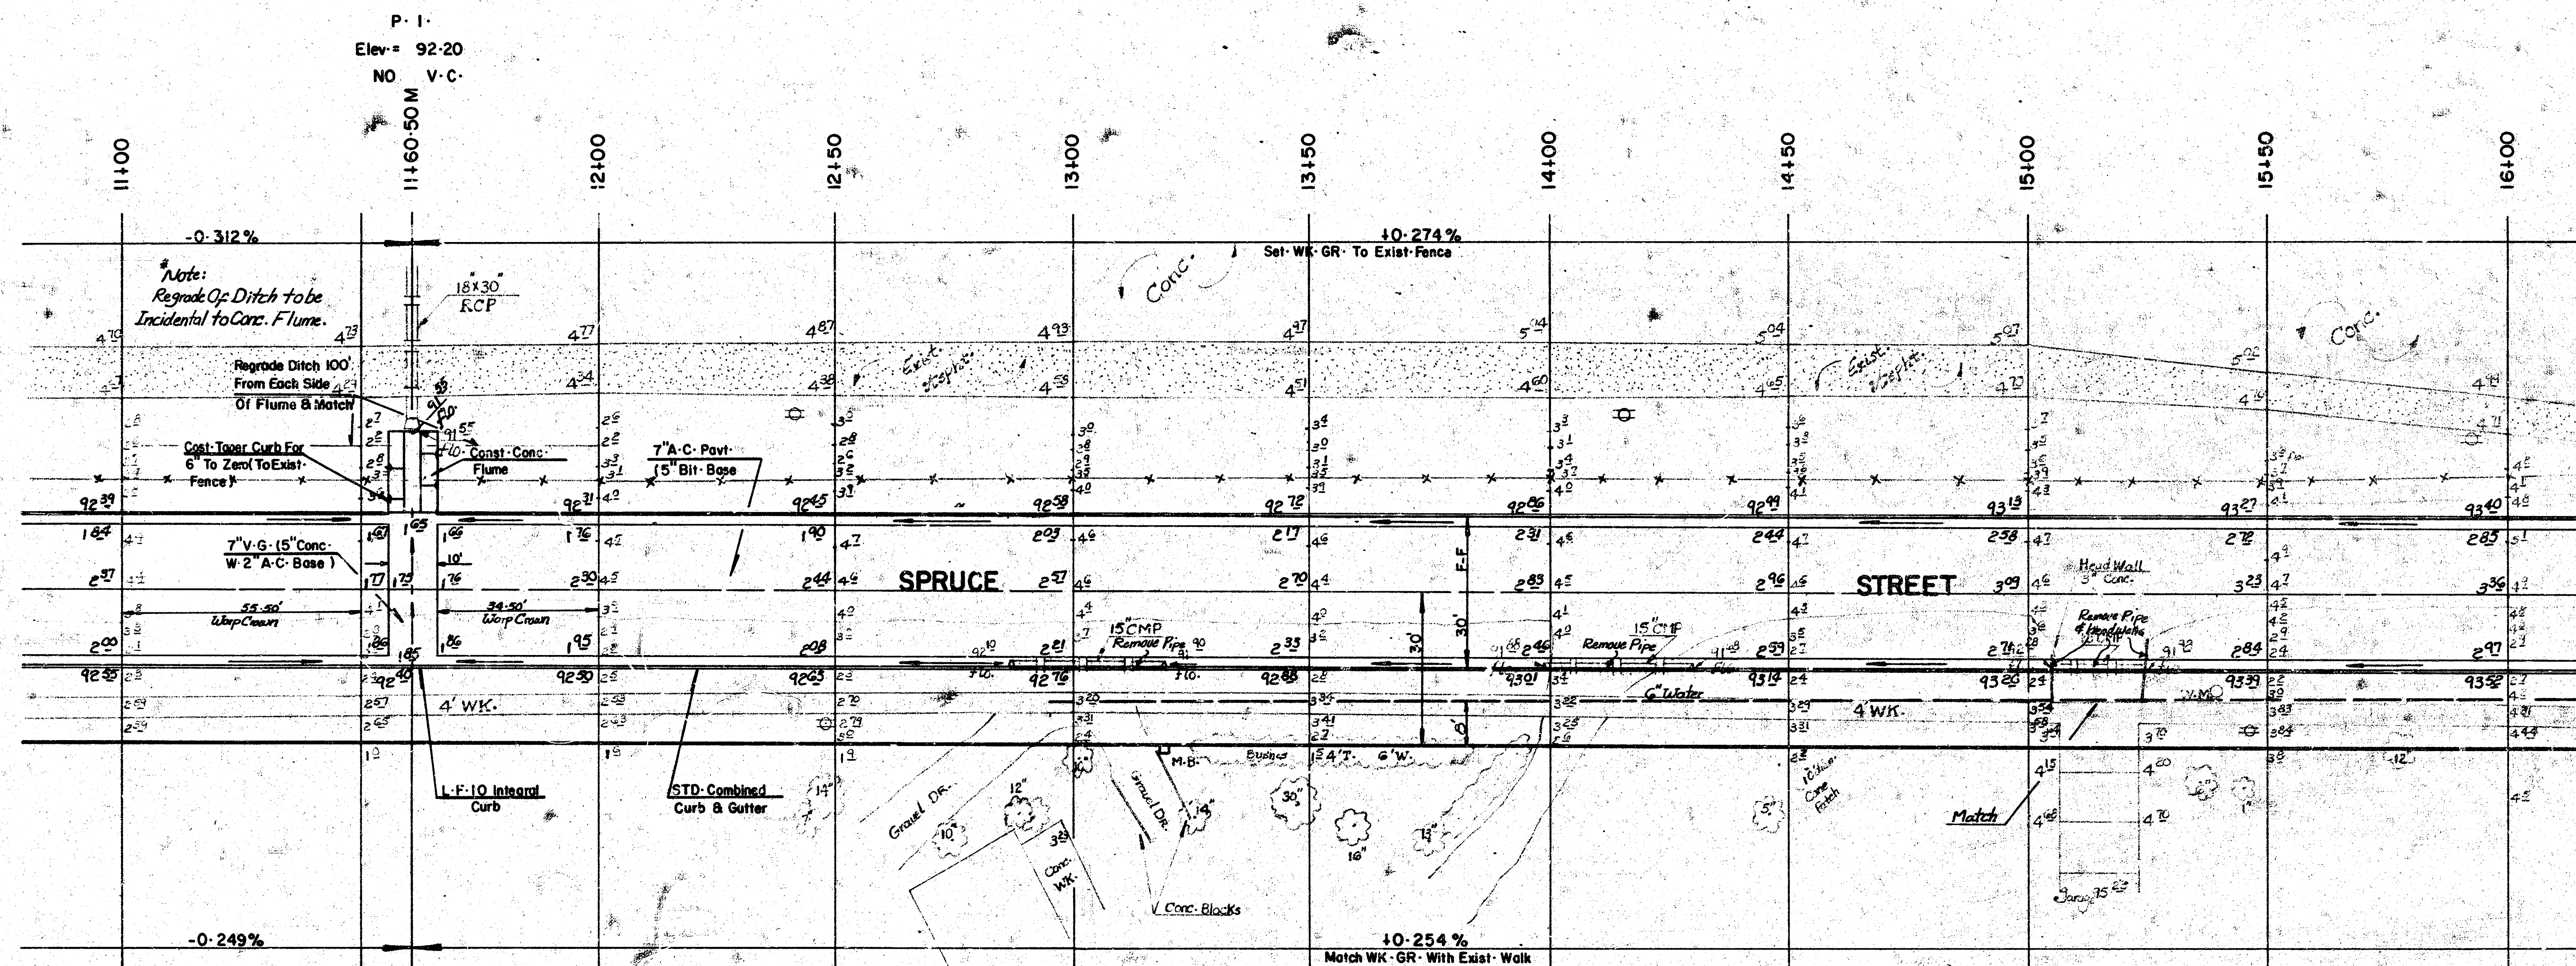

P. I.
Elev. = 92.40
NO V.C.

SPRUCES ST.

9/6

